




# Motorola V60s Front Chassis Disassembly

Written By: Eric Freeman

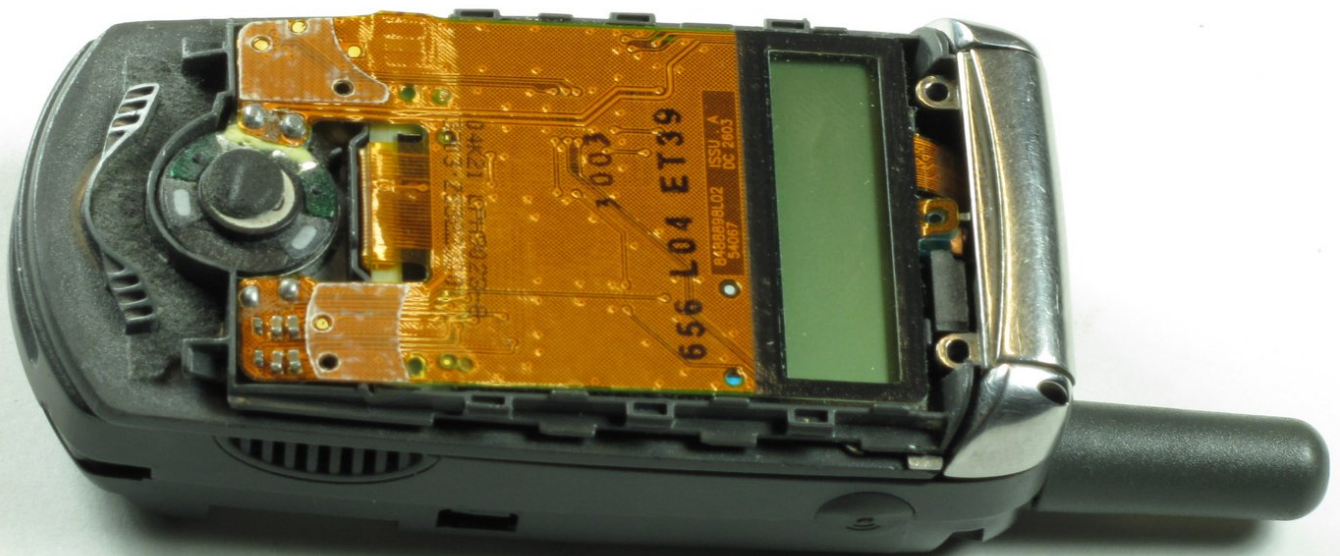

---

## INTRODUCTION

This guide shows how to take apart the front casing. This allows access to the front LCD screen.

---

### TOOLS:

- [Phillips #1 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Motorola V60s Front Chassis Disassembly



- Push in and hold small release latch.
- ⓘ Hold the latch through step 2.

## Step 2



- While holding the release latch, use a [opening tool](#) to help you slide off the front cover.

### Step 3



- Remove the two Philips screws at top of phone with a #1 Philips screwdriver.

### Step 4



- Use a opening tool to gently pry off black cover, revealing the internal LCD display.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-10 07:39:16 PM.