



# Nokia 3360 Cover Plate Replacement

Written By: Kirk Gonzalez



## INTRODUCTION

This guide shows how remove and replace a damaged cover plate.

## Step 1 — Battery



- Press down on the back of the phone with your thumb. Then slide the back plate upward toward the top of the phone.
- Lift the back plate off the phone.

## Step 2




- To release the battery, press the two tabs that are located directly above the battery towards the top of the phone at the same time.

## Step 3



- Lift the battery out of the phone.
- ⚠ Note: Upon reassembly of the phone refer to second picture. The bottom of the battery with three square openings should line up with the prongs sticking out of the phone.

## Step 4 — Cover Plate

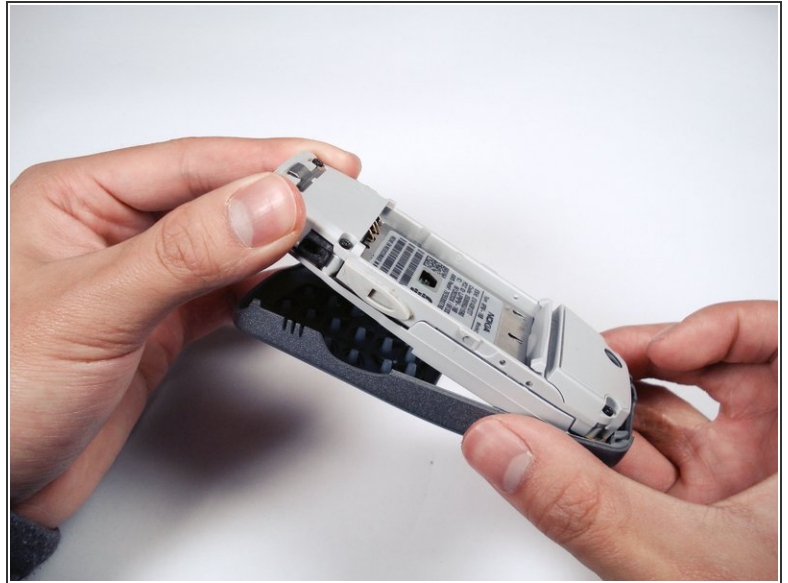

- Use finger nails of your thumbs to gently pull apart the face plate.
- While the face plate is pulled apart, use index fingers to pull inner case towards you.
- Separate faceplate and inner case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-08-24 09:06:16 AM.