



Motorola V710 Camera Replacement

Written By: Karl Sanders




INTRODUCTION

This guide will show you how to replace the camera module.

TOOLS:



- [Spudger](#) (1)
-

Step 1 — Screen

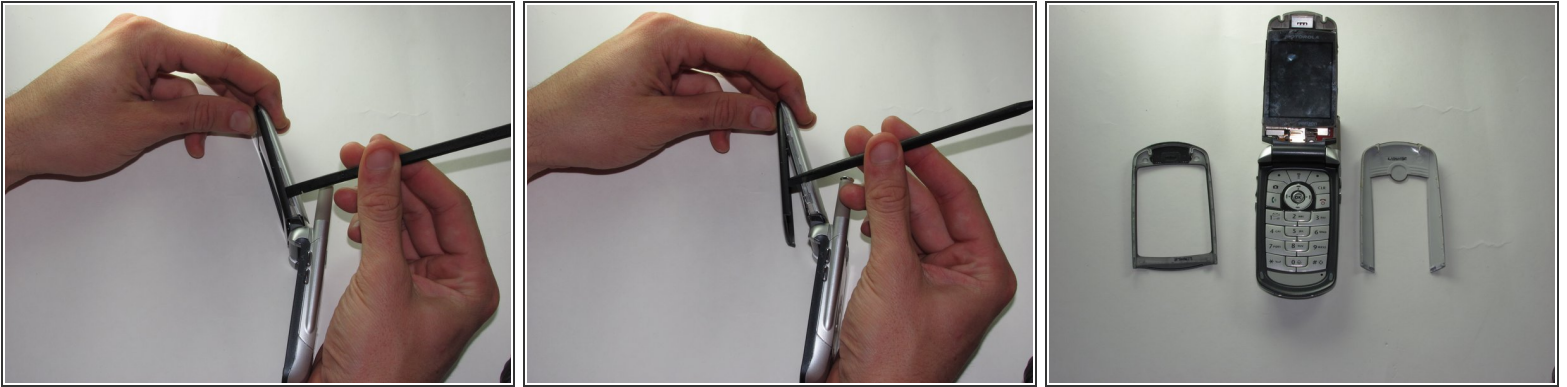

- Insert the spudger between the gray and black plates of the screen casing.
- Using a twist and pry motion work your way around the phone slowly prying the two plates apart.
- Note: this part of the phone is glued and will require re-gluing to return the phone to its original state.

Step 2

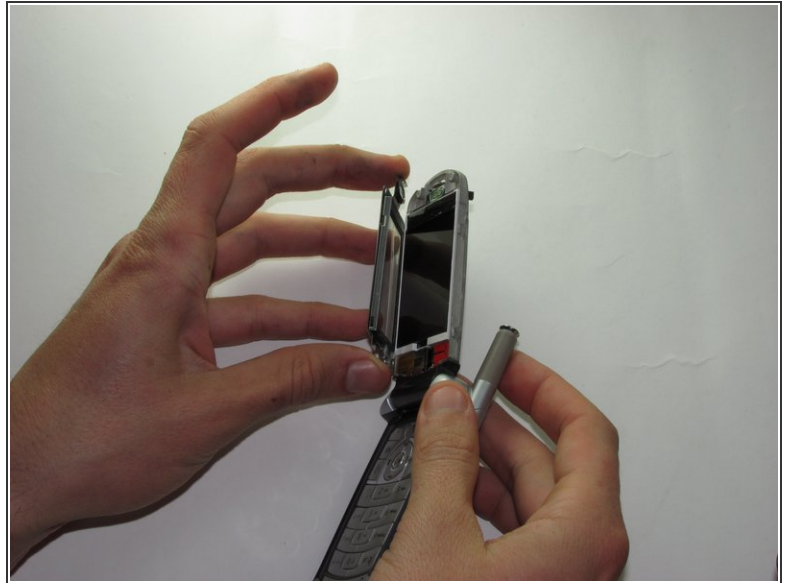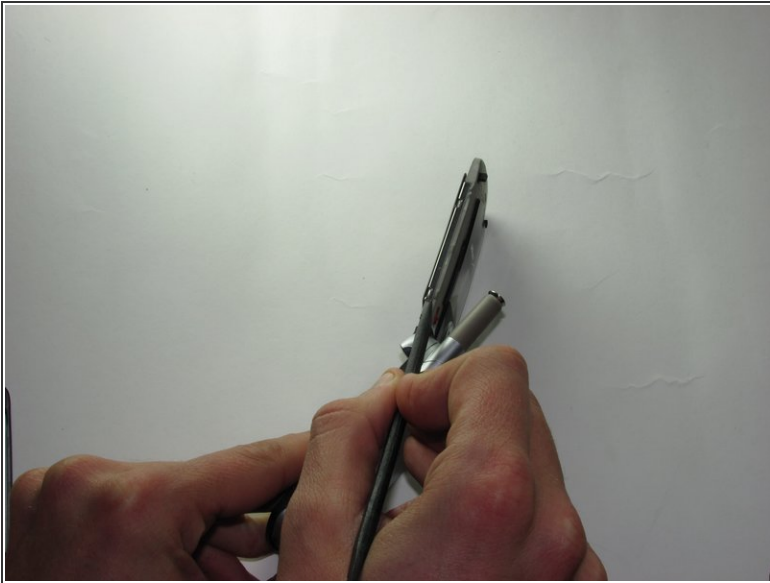

- If you look at the side of the now exposed screen there should be a metal casing held onto the phone by two tabs.
- Insert the spudger underneath one of the corners of the metal and bend it out enough to slip it over the tabs.
- This metal is reasonably resistant to bending and will likely require a good deal of force to get it off the phone.

Step 3





- Orient the phone so that the main screen is facing upward.
- Locate the hinge casing, a dark gray piece that covers the hinge.
- Insert the spudger under one of the top corners of this piece and using a twist and pry motion remove from the phone.

Step 4




- Use the spudger to pry upward and remove the plug that connects the screen to the main body of the phone.

Step 5

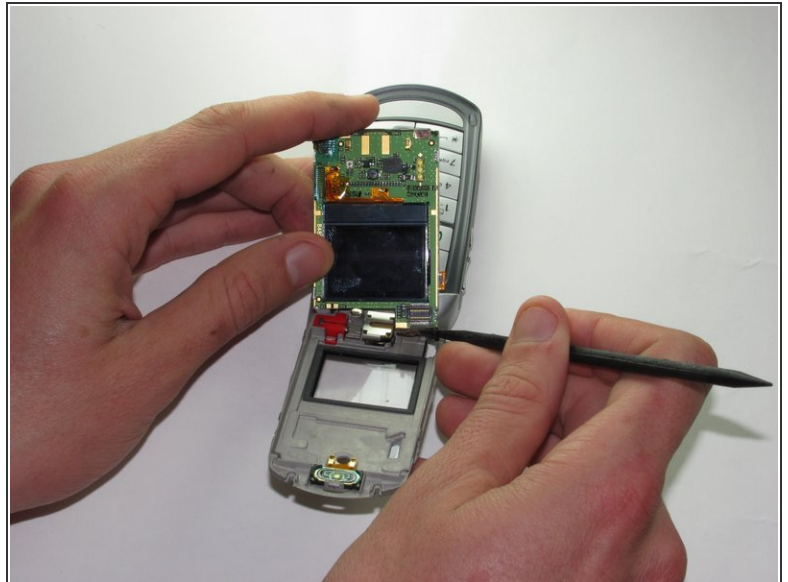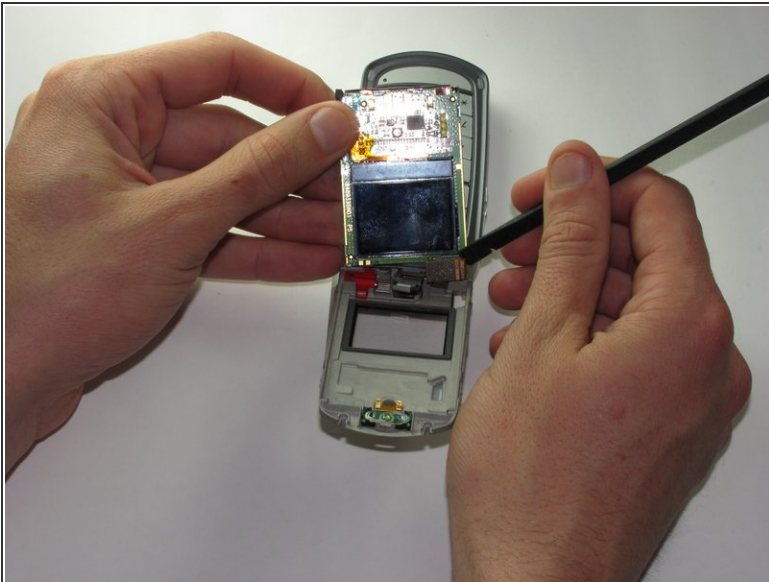

- Insert the spudger under the screen and pry the screen forward.
- Remove the plug on the back of the screen that connects it to the camera.

Step 6

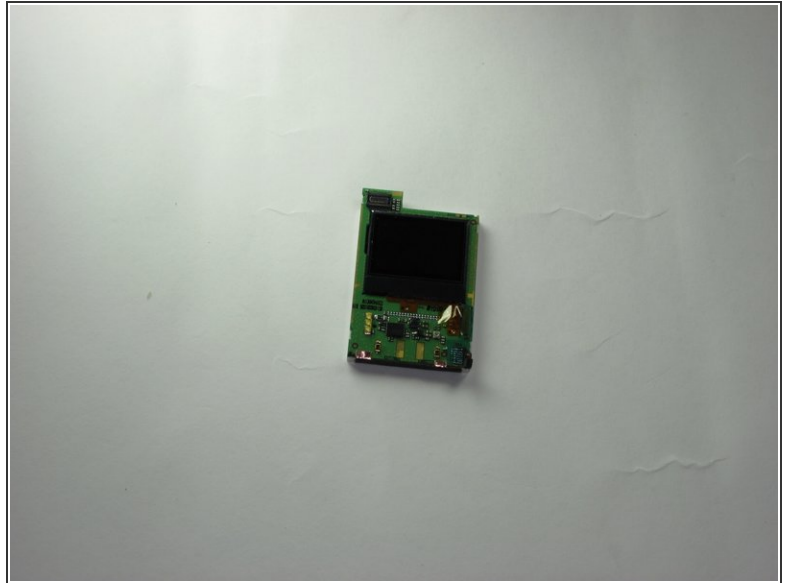

- Use the spudger to remove the screen.

Step 7 — Camera



- Use the spudger to remove the camera module.
- Note: The camera has an adhesive holding it in place, so a slight force is necessary to remove it.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-08-01 02:24:12 AM.