



# iPhone 5s Rear Facing Camera Replacement

Prerequisite to remove the camera after the logic board.

Written By: Sam Goldheart



---

## INTRODUCTION


Prerequisite to remove the camera after the logic board.

---

### TOOLS:

- [Tweezers](#) (1)
-

## Step 1 — Rear Facing Camera

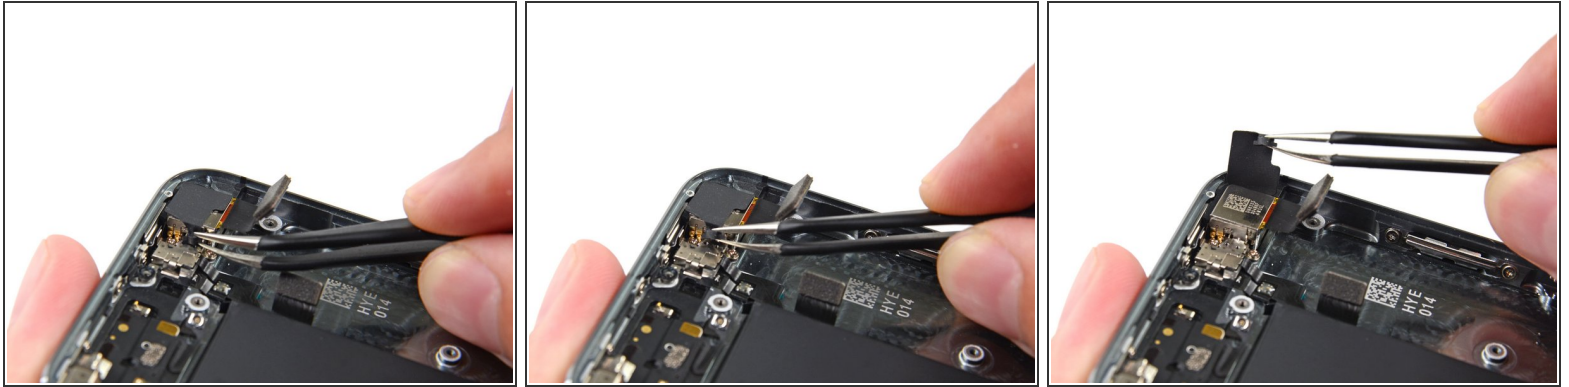

- Using a pair of tweezers, flip the rubber camera cover out of its clip and toward the outside of the rear case.

**⚠ Do not** attempt to fully remove this cover. It is attached to the rear case and only needs to be flipped open, not removed.

## Step 2



- Remove the rear-facing camera from the rear case.
- ☑ During reassembly, the camera cable should bend in a 'U' shape to slot in behind the logic board.
- ☑ If the rubber camera bumper has shifted, be sure to replace it before reassembling your iPhone.

To reassemble your device, follow these instructions in reverse order.