



# LG VX3200 Keypad Replacement

Written By: Bradley Hutchinson



## INTRODUCTION

How to replace the phone's soft keypad.

---

### TOOLS:

- [Phillips #0 Screwdriver \(1\)](#)
  - [Flathead 3/32" or 2.5 mm Screwdriver \(1\)](#)
-

## Step 1 — Battery



- Press button labeled "Push". In the photo depicted the button is being depressed by the left finger.
- Pull back panel toward bottom of phone.

## Step 2



- From the lip on the top of the battery, lift it out of the phone.

## Step 3 — Keypad





- Remove the 4 small screws from the back panel, under the battery, using 00 Phillips-head.

## Step 4




- Starting at the top of the phone near the antenna, use a screwdriver or other small tool, maybe even fingernails, to pry the rear panel off.
- ⓘ There are 4 places where the panel snaps together to the main part of the phone.
- By systematically prying up the edges of the back panel, moving about a quarter of an inch, and prying again, the panel will begin to lift off.
- Don't be afraid to damage anything, the panel requires a bit of force to detach.

## Step 5

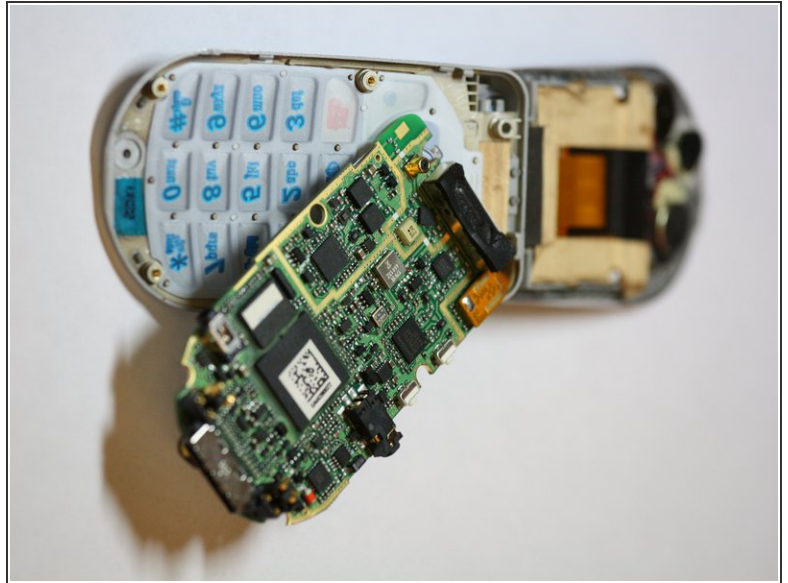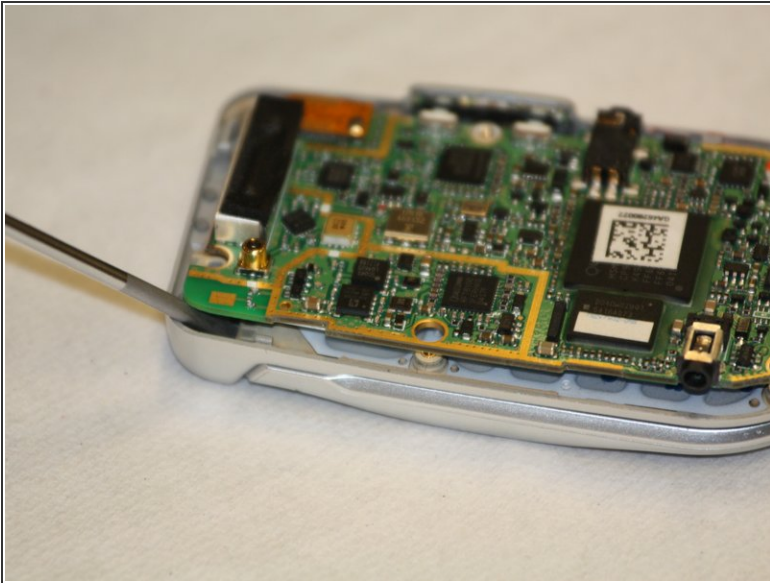

- The logic board is only held on with 4 tabs and a data cable in the top right. Simply pry from one side using a screwdriver, popping out the board, before lifting the display data cable.

## Step 6

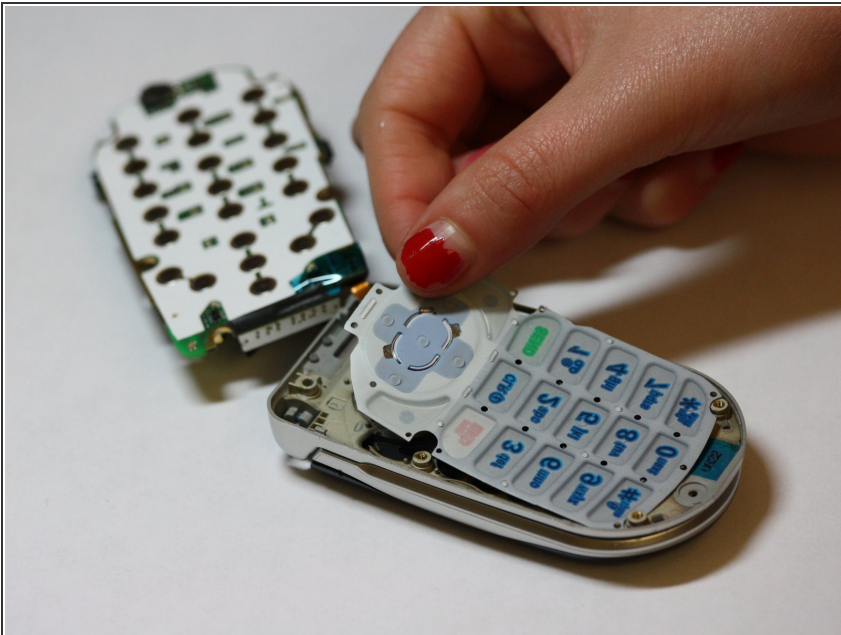

- Lift the keypad up from beneath the logic board.
- ⓘ It is not glued or secured in any way, so it should come away easily.

To reassemble your device, follow these instructions in reverse order.

