




Palm Treo 600 Front Case Replacement

Written By: Michael Polka

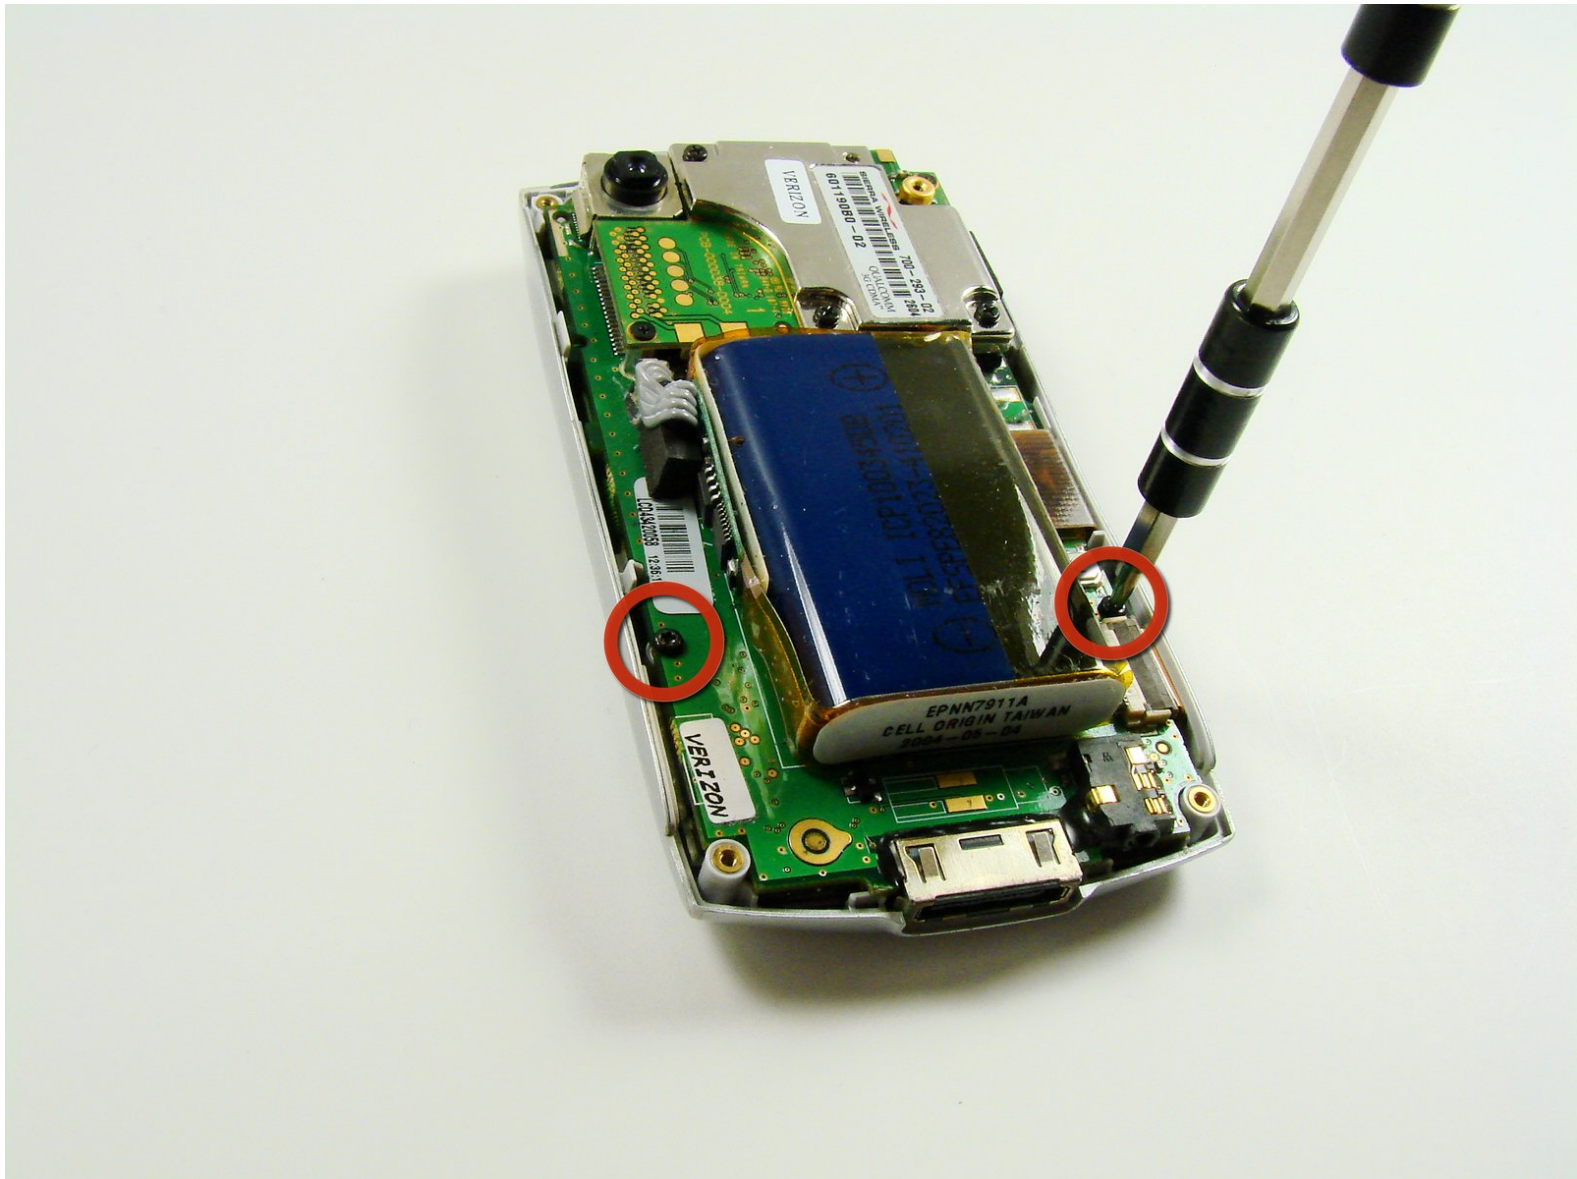

INTRODUCTION

After you have taken off the back case, the front case can also be removed to help you complete other teardown guides.

TOOLS:

- [T6 Torx Screwdriver](#) (1)
-

Step 1 — Back Case




- On the back of the device, locate the 3 rubber plugs, and use a plastic spudger to remove them.

Step 2



- Use the T6 Torx Screwdriver to remove all 4 screws.
- ⓘ You have to first remove the Stylus to access the 4th screw.

Step 3

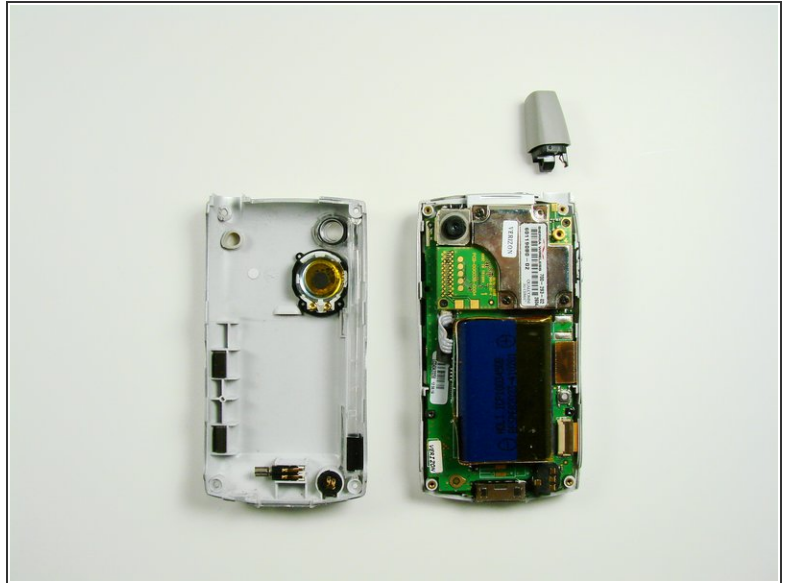

- Using a plastic opening tool, carefully separate the front and back cases.

i **Note:** The antenna will detach from the phone.

Step 4 — Front Case



- Using a T6 Torx Screwdriver, remove the two screws.

i The motherboard will now be loose from the front case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-16 08:20:01 AM.