



Samsung 500C ChromeBook Internal Speakers Replacement

A guide for replacing the internal speakers of the laptop.

Written By: Garrett Kissinger



 **TOOLS:**


- Phillips #0 Screwdriver (1)
 - Spudger (1)
-

Step 1 — Internal Speakers



- Remove the back panel of the device by taking out the seven screws on the back panel of the device.
- Four of the screws are under the rubber feet so they will need to be removed. To remove the feet, pry them off with the spudger.

Step 2

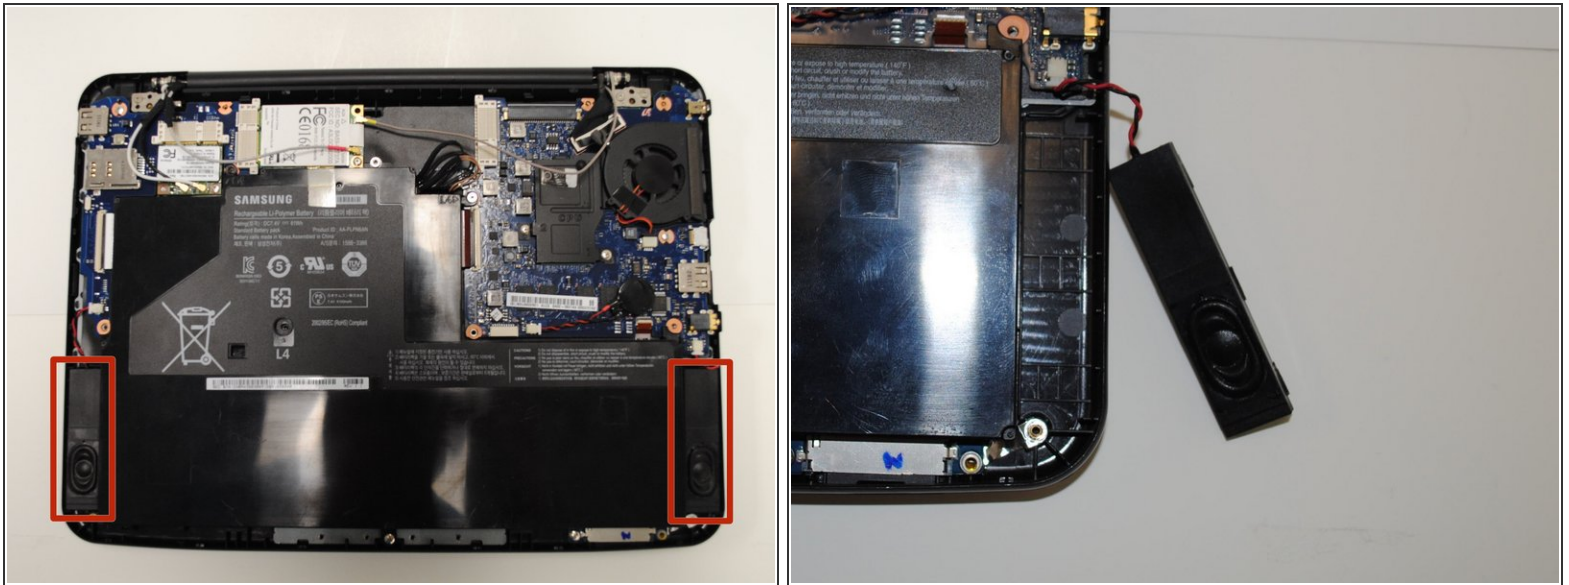

- Note: The Speaker is held in with an adhesive back so some force will be needed to remove it.
- Remove the speaker using a spudger and detach the cord connected to it from the laptop. The speaker location is seen highlighted in picture 1.
- Attach the cord of your replacement speaker and reassemble the device.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-19 10:07:03 PM.