




Timbuk2 Suitcase Roller Handle Replacement

How to replace a broken roller handle on a Timbuk2 Suitcase.

Written By: Emilee

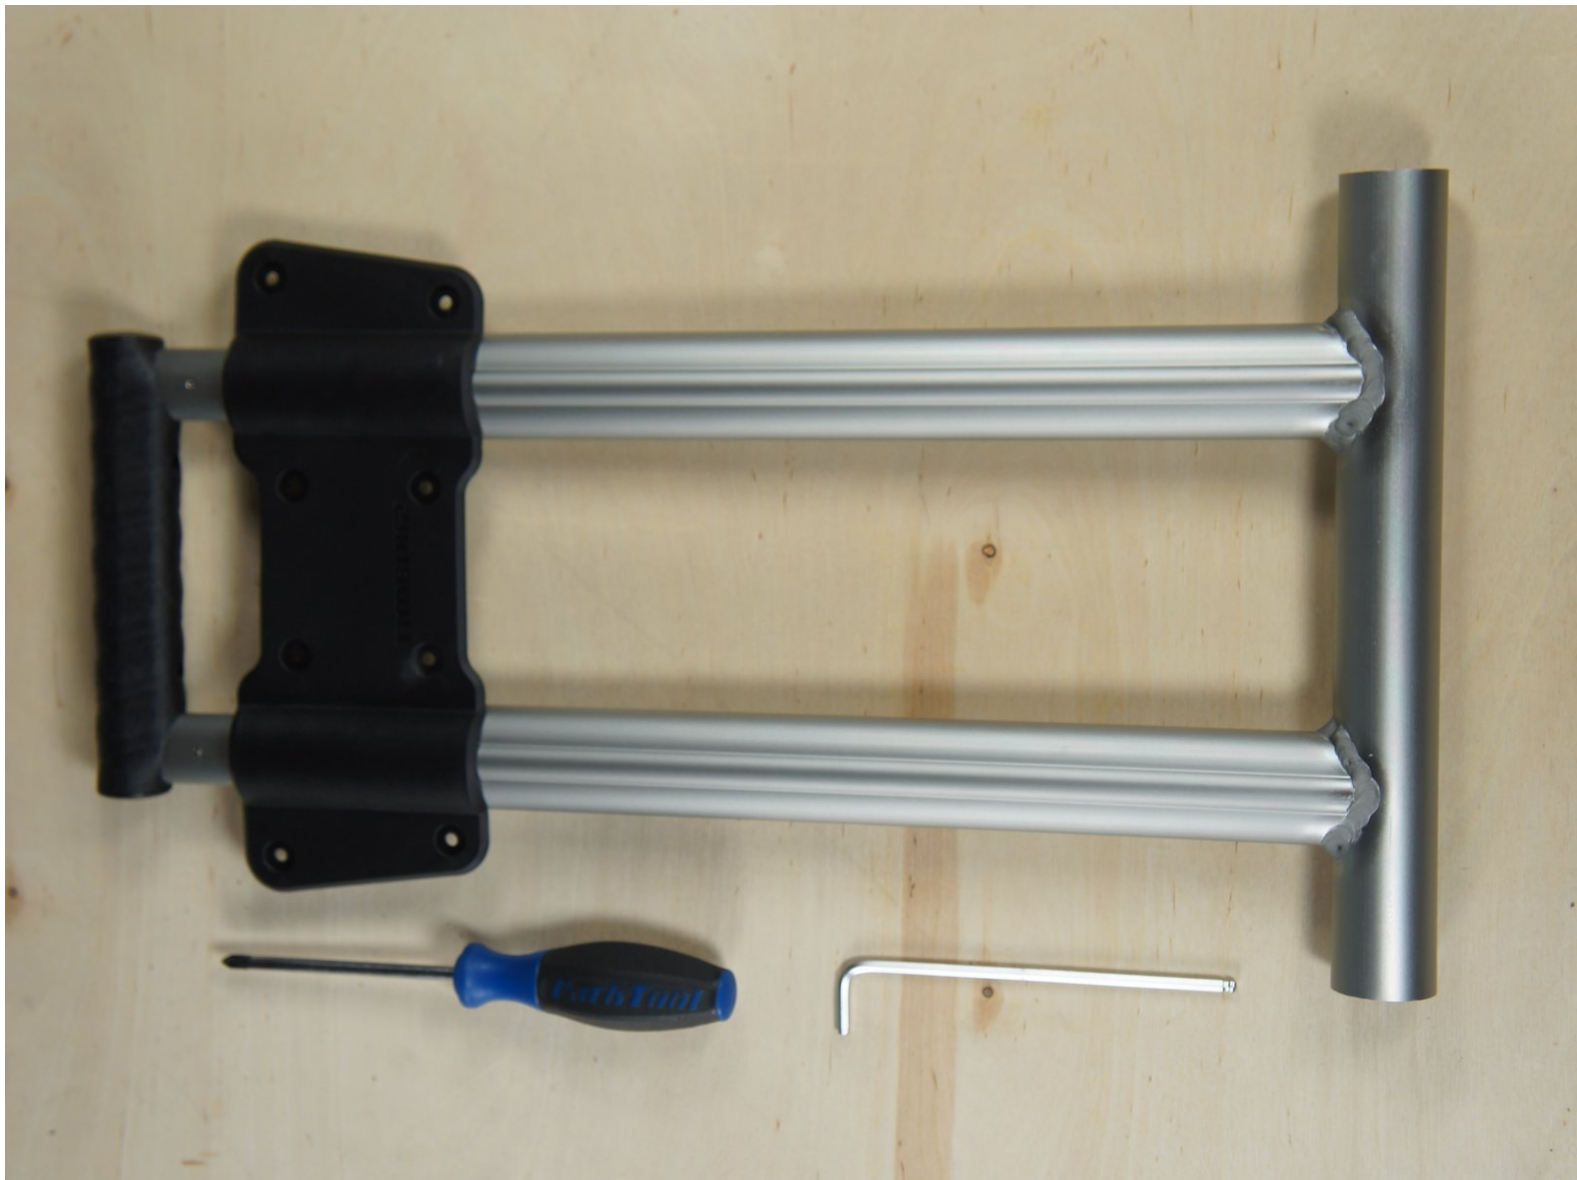

**TOOLS:**


- [4mm Allen Wrench](#) (1)
- [Screwdriver](#) (1)

**PARTS:**

- [Roller Handle set](#) (1)

Contact warranty@timbuk2.com for this part.

Step 1 — Roller Handle

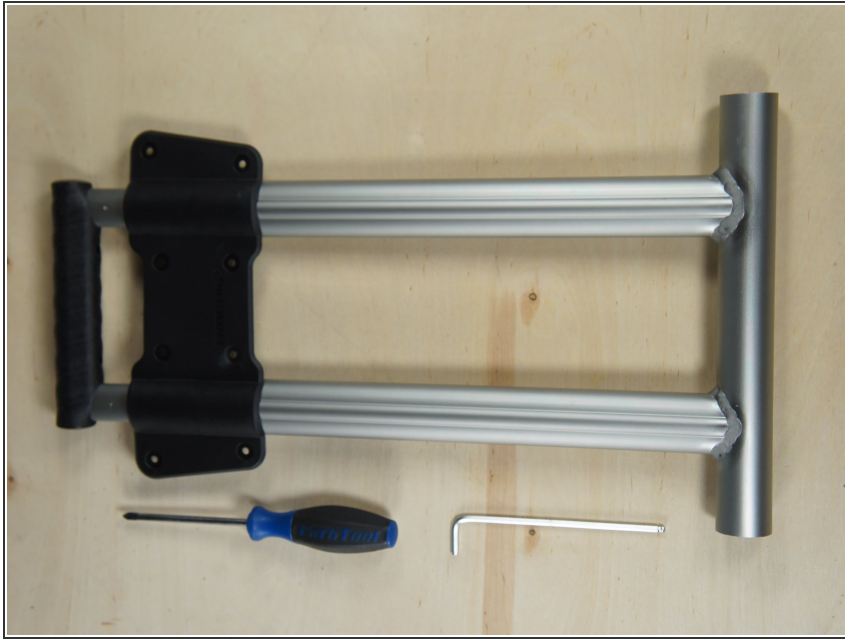

- Here are the tools you will need:
 - New roller handle set
 - Screwdriver
 - 4mm Allen wrench

Step 2



- Open luggage and unzip backing, exposing back of roller. Using an Allen wrench, unscrew all 10 screws along the bottom plate and remove plastic coverings

Step 3



- Turn luggage over and using Allen wrench, unscrew all 8 bolts on the back of luggage handle assembly. Remove handle frame from luggage body

Step 4



- Put the new roller handle set in place. Repeat steps 2 and 3 in the opposite order.
- You're finished!