




Motorola V60c Antenna Replacement

Written By: Ryan Kuroiwa

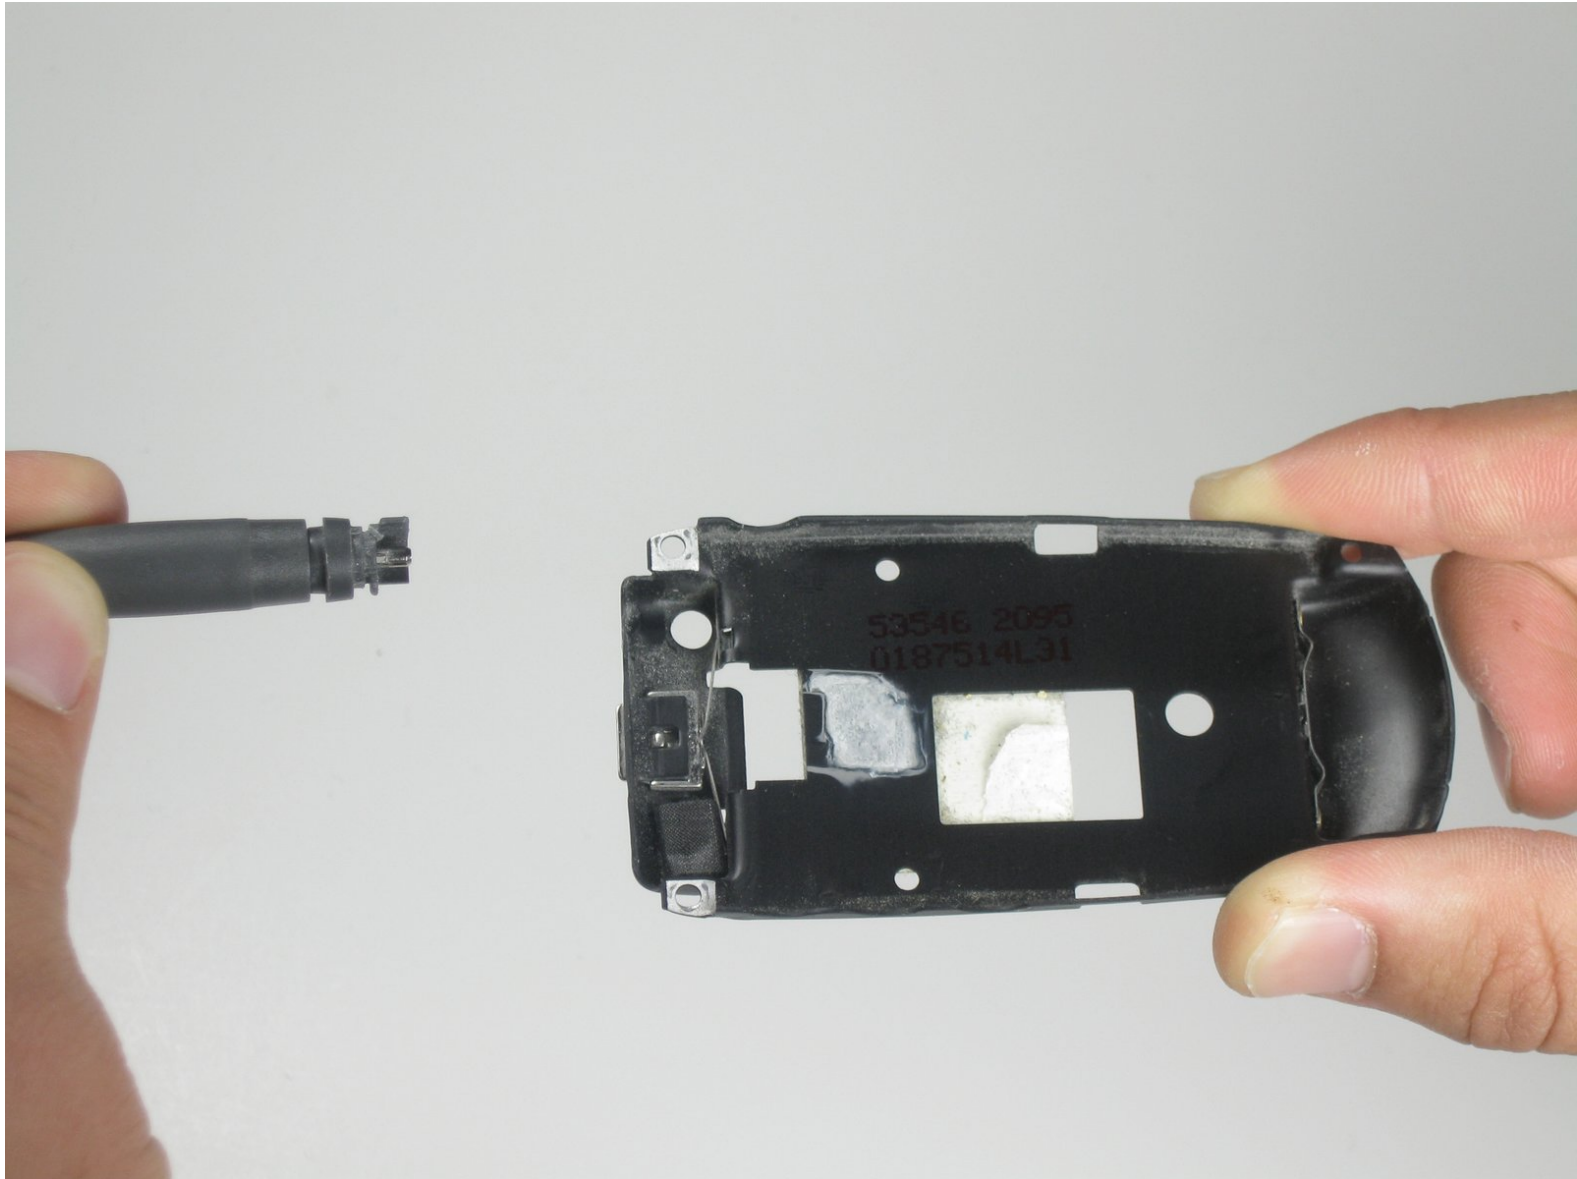

INTRODUCTION

How to replace a faulty antenna.



TOOLS:

- [iFixit Opening Tools](#) (1)
- [T6 Torx Screwdriver](#) (1)



PARTS:

- [Motorola V60c Antenna](#) (1)

Step 1 — Battery



- Depress the silver button.
- Pull from top of phone to lift the cover.

Step 2



- Hold battery from both sides at the bottom.
- Push upwards and gently lift to remove.

Step 3 — Antenna




- Remove the four screws from the corners using a T-6 screwdriver.
- ⓘ NOTE: Bottom two screws are gold.
- ⓘ NOTE: Make sure screws return to correct place when reassembling.

Step 4




- Use spudger to pry up back cover from the two side clips.
- ⓘ NOTE: sticker might be attached to rest of phone.

Step 5

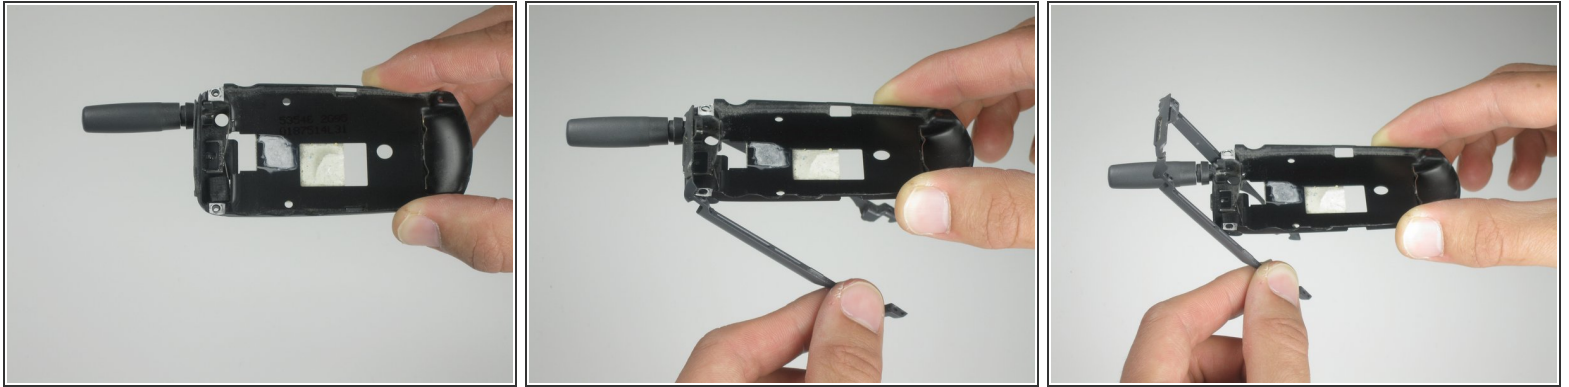

- Flip over the back cover.
- Remove the plastic frame.

Step 6

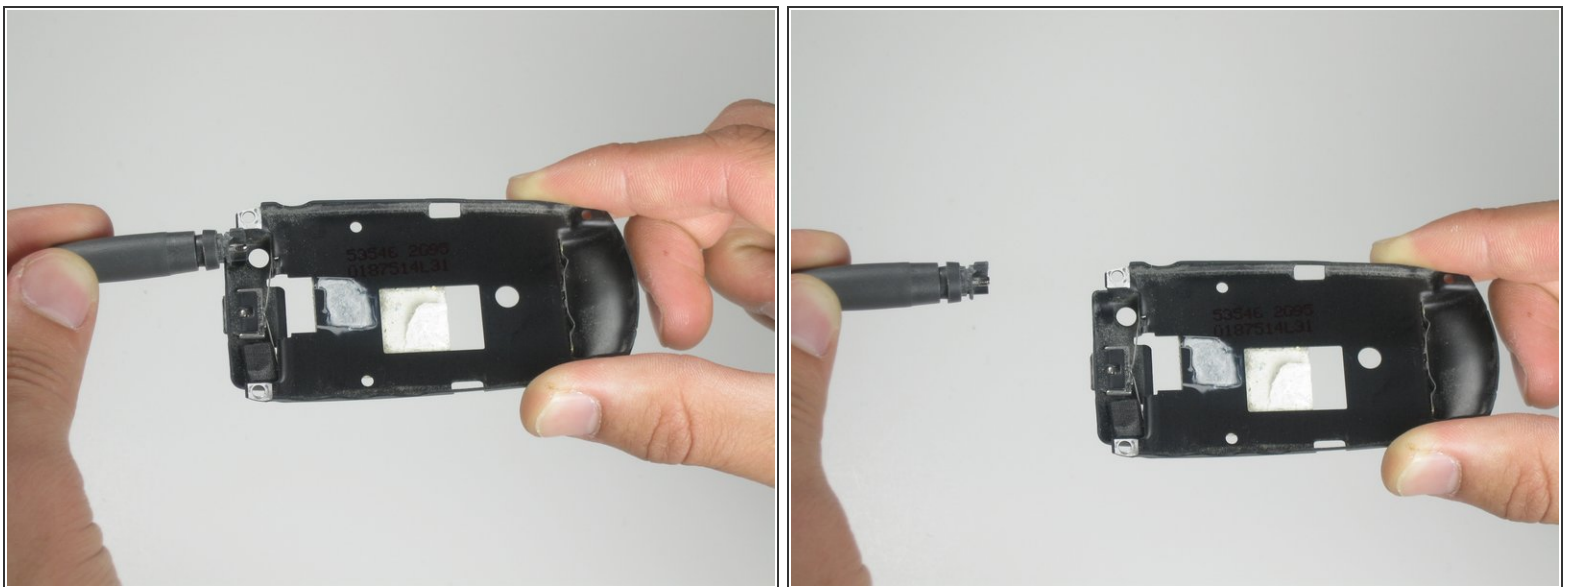

- Lift up antenna.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-19 03:26:51 AM.