



Siemens A56 SIM Card Replacement

The SIM card needs to be replaced when bringing this phone to new service provider or changing to the Siemens A56 phone from a different phone. The SIM card contains relevant information like phone contacts.


Written By: Lauren Young




 **TOOLS:**

- [iFixit Opening Tools](#) (1)
-

Step 1 — Battery

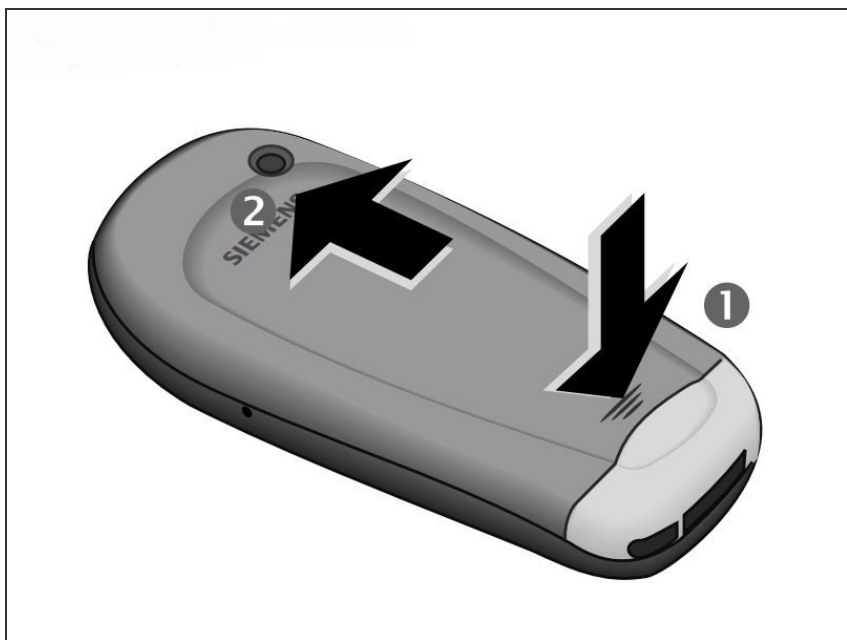


- Press down on the grooved area firmly in the direction of arrow #1.
- While maintaining the downwards pressure, push the back cover in the direction of arrow #2 until the back cover slides off.


 Photos taken from:
<http://theinformr.com/uploads/manuals/si...>


Step 2




 Turn off the phone before removing the battery to avoid damage.

- Press the latch on the battery in the direction of arrow #3.
- Lift battery at the cutout on the side of the phone, then tilt upwards and remove.

 It may be necessary to use the tip of a fingernail or a plastic lifting tool to remove the battery.

 Photos taken from:
<http://theinformr.com/uploads/manuals/si...>

Step 3 — SIM Card

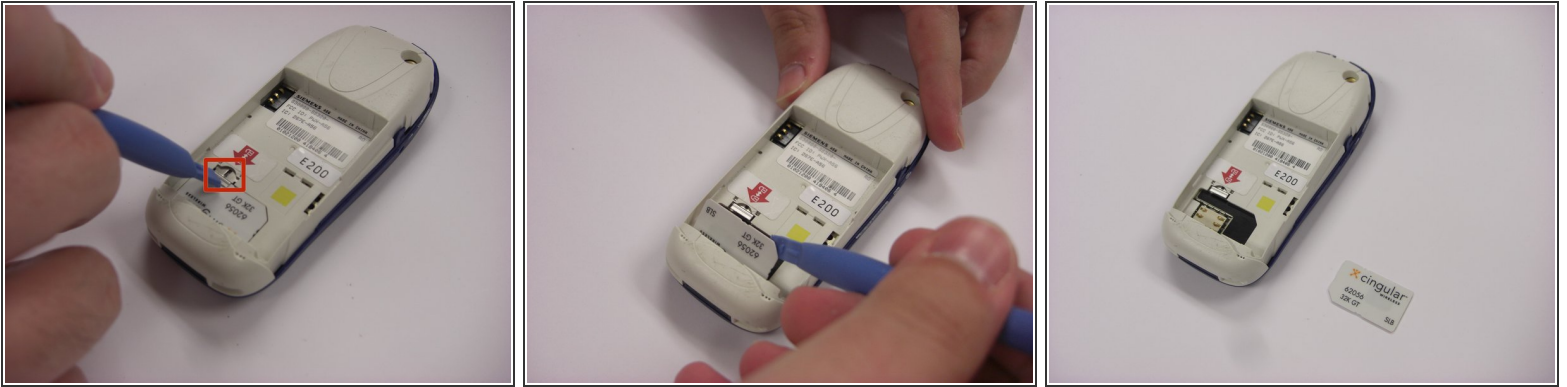

- With the phone turned onto its backside, gently slide the metal clasp up to unlock the SIM card.
- ⓘ It may be easier to move the clasp with a plastic opening tool, but it is not required.
- The SIM card will spring up once the clasp is released.
- Remove the SIM card from phone.

Step 4



- To replace the SIM card, insert the card back into the slot.
- While pressing the SIM card with one finger, slide the metal clasp down to lock the card in place.

This document was last generated on 2019-07-18 07:13:11 AM.