




Siemens A56 Keyboard Replacement

If the phone keyboard is damaged or is malfunctioning this guide explains how to repair and/or replace the phone's keyboard.

Written By: Andrew Corriveau




Step 1 — Battery

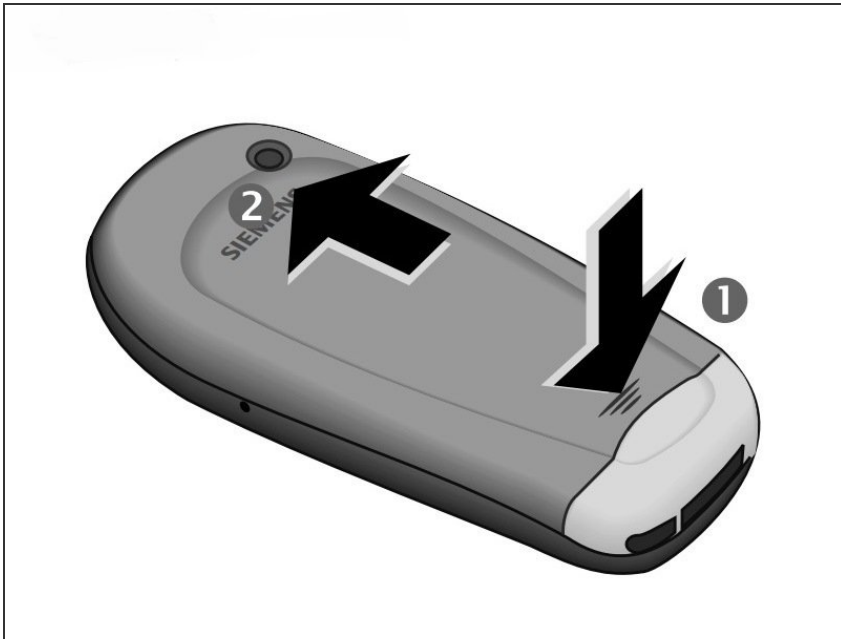

- Press down on the grooved area firmly in the direction of arrow #1.
- While maintaining the downwards pressure, push the back cover in the direction of arrow #2 until the back cover slides off.

i Photos taken from:
<http://theinformr.com/uploads/manuals/si...>

Step 2

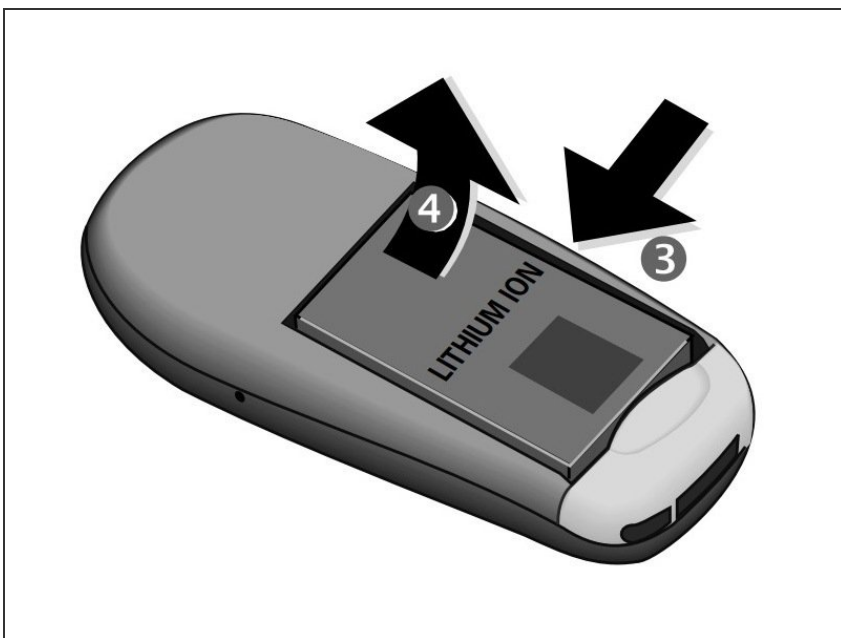


- !** Turn off the phone before removing the battery to avoid damage.
- Press the latch on the battery in the direction of arrow #3.
- Lift battery at the cutout on the side of the phone, then tilt upwards and remove.

i It may be necessary to use the tip of a fingernail or a plastic lifting tool to remove the battery.

i Photos taken from:
<http://theinformr.com/uploads/manuals/si...>

Step 3 — Front Plate

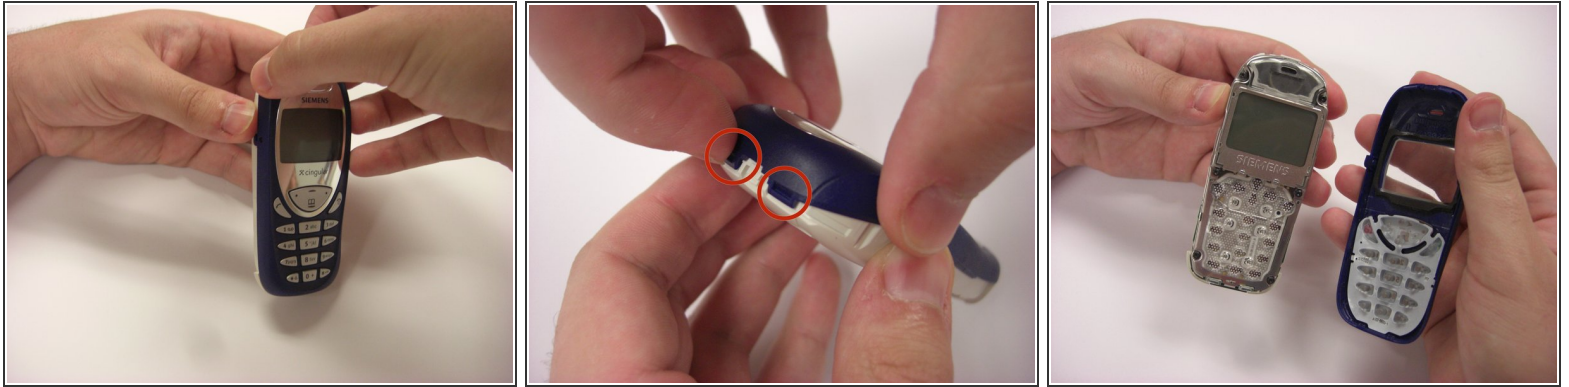

- Firmly grasp the white casing of the phone with one hand and the blue cover with the other hand as seen in the first picture.
- Pull up on the two plastic clips at the top of the phone.
- While the clips are pulled up, pull the blue cover away from the white casing to remove it.

Step 4 — Keyboard



- The keyboard can be easily removed by hand.
- Once the old keyboard has been removed, it is possible to replace it with a new keyboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-16 11:30:45 PM.