



Siemens A56 Clean Charging Port Replacement

This is used to clean the charging port of the phone to get rid of corrosion on the surface.


Written By: Lauren Young



 **TOOLS:**

- [Detailing Brush](#) (1)
-

Step 1 — Battery

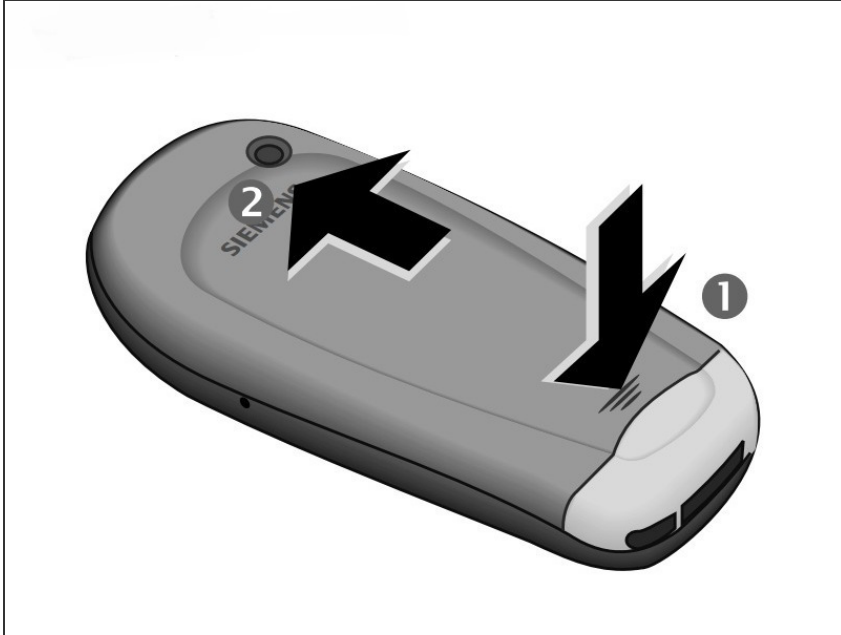

- Press down on the grooved area firmly in the direction of arrow #1.
- While maintaining the downwards pressure, push the back cover in the direction of arrow #2 until the back cover slides off.

ⓘ Photos taken from:
<http://theinformr.com/uploads/manuals/si...>

Step 2



⚠ Turn off the phone before removing the battery to avoid damage.

- Press the latch on the battery in the direction of arrow #3.
- Lift battery at the cutout on the side of the phone, then tilt upwards and remove.

ⓘ It may be necessary to use the tip of a fingernail or a plastic lifting tool to remove the battery.

ⓘ Photos taken from:
<http://theinformr.com/uploads/manuals/si...>

Step 3 — Clean Charging Port



- Use soft brush to clean the charging port of the phone. If needed, use alcohol and a q-tip for more thorough cleaning.

This document was last generated on 2017-06-18 12:45:05 PM.