



# Asus S500 USB, Headphone, and SD card Port board replacement

Access and remove the left side USB Ports/Headphone Jack/ SD Card Slot.

Written By: Isaac Lemus



---

## INTRODUCTION

Access and remove the left side USB Ports/Headphone Jack/ SD Card Slot.

---

### TOOLS:


- [Phillips #1 Screwdriver](#) (1)
-

## Step 1 — USB, Headphone, and SD card Ports




- Unscrew the 10 screws on the back cover

## Step 2

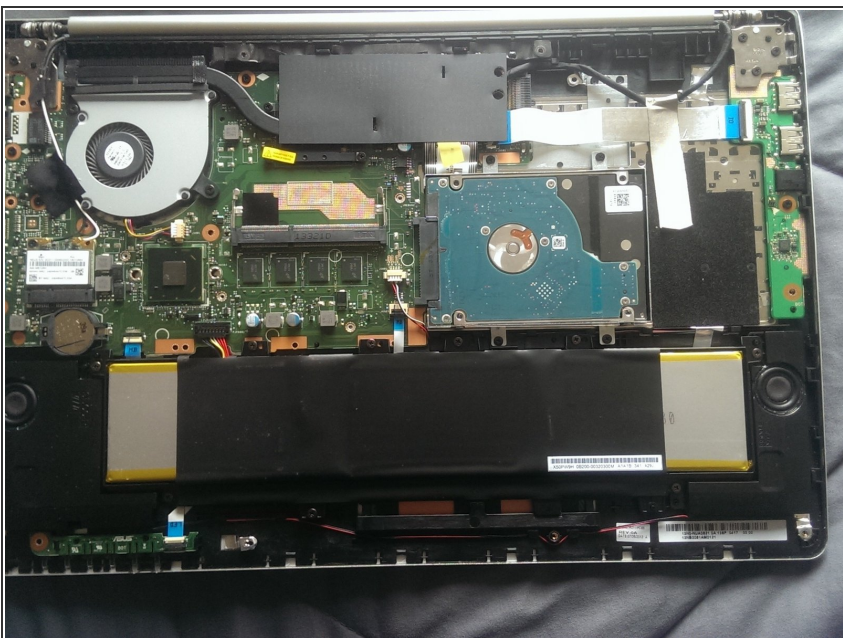

- Remove back cover (pry open along the grey/black line, they are held together by clips)

## Step 3

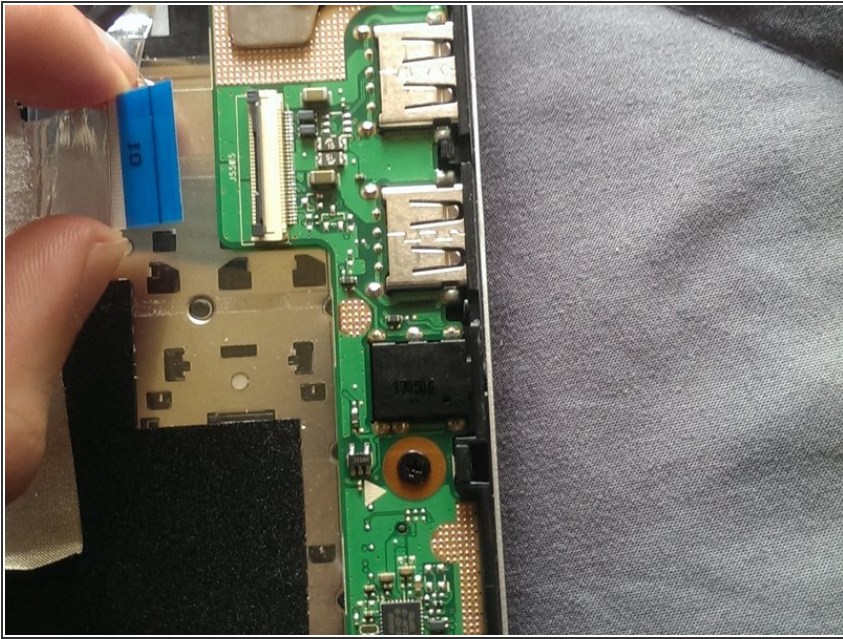

- Lift up tab and pull out the connector
- Unscrew the 4 screws
- Open up the screen (as you would to open up the laptop), and in doing so the metal piece will open up.
- Jostle the ports and remove the small board.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-13 06:12:07 AM.