




Motorola V60i Back Plate Replacement

Step-by-step guide to removing your Motorola V60i phone's back plate.

Written By: Elizabeth OBrien

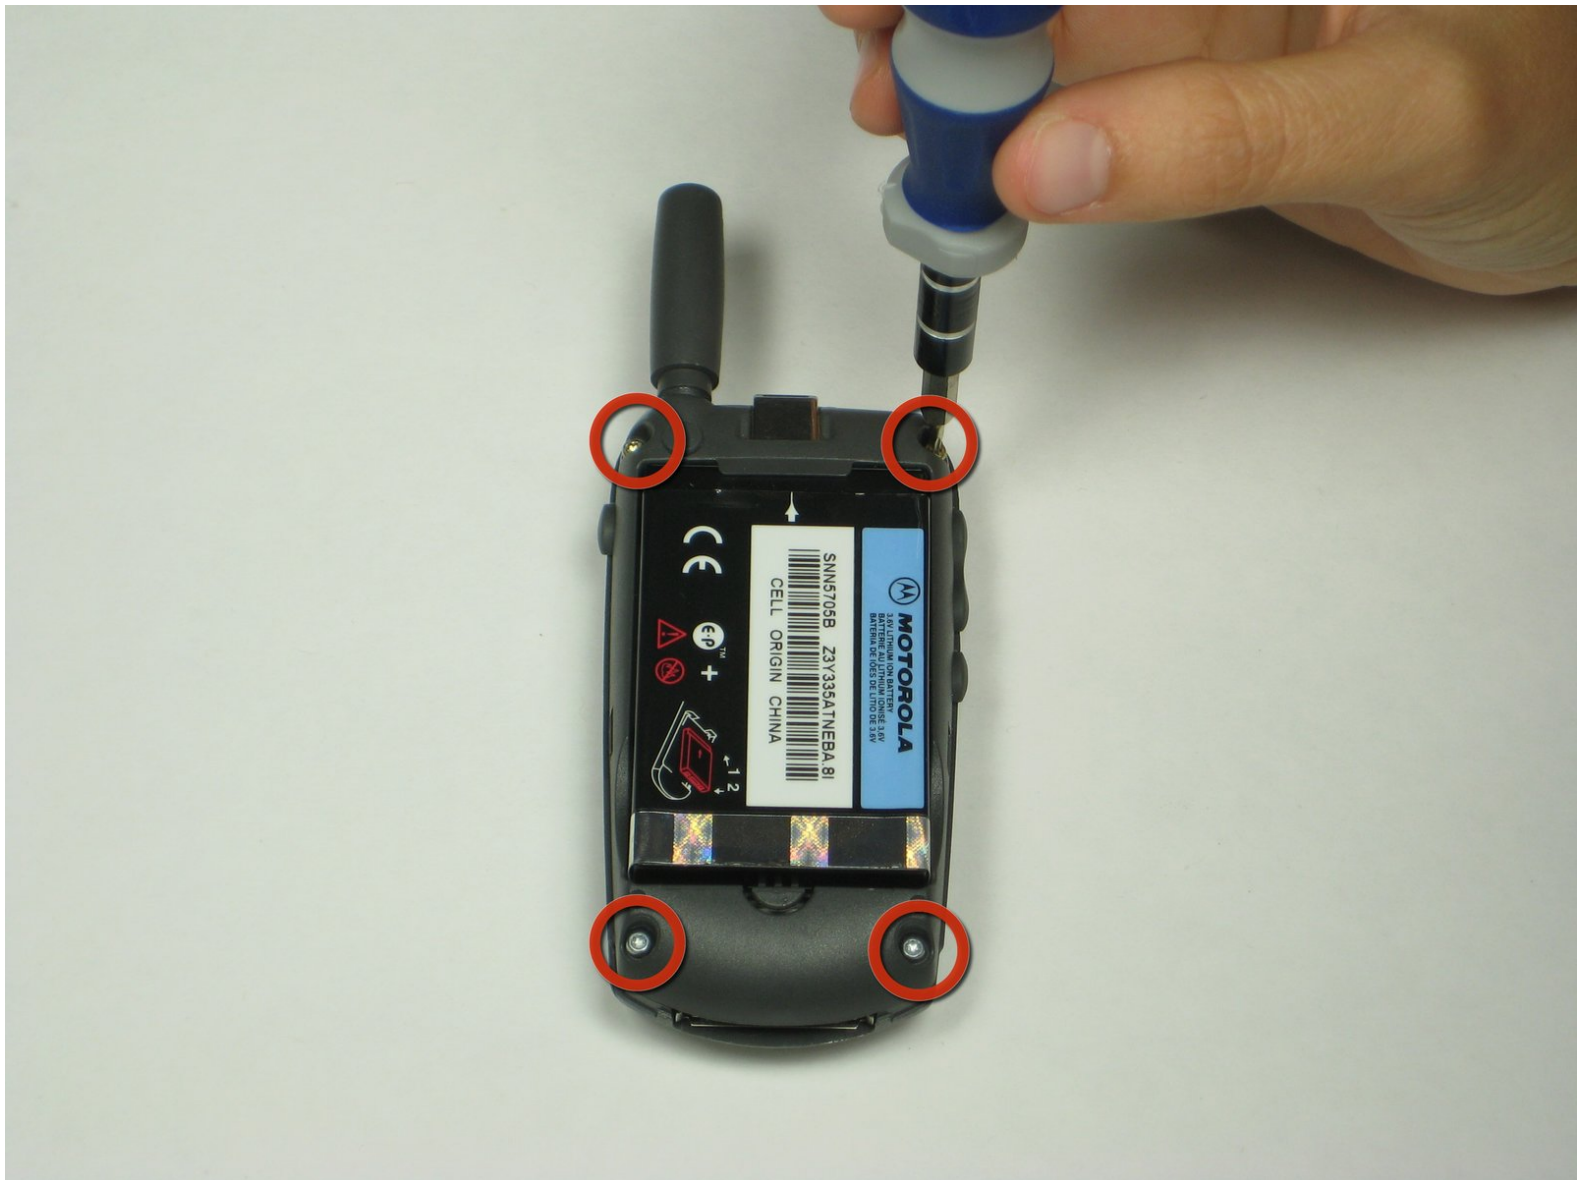

INTRODUCTION

Step-by-step guide to removing your phone's back plate.

TOOLS:

- [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery



- Flip phone to see back cover.
- Using either finger or spudger tool press button located near the top of phone by the antenna.

Step 2



- Pry up back plate from phone to reveal battery.
- Push button near bottom of battery using either your finger or the spudger. This will release the battery.

Step 3 — Back Plate




- Using a T6 Torx Screwdriver remove the four torxs on the back of the phone.

Step 4



- Simultaneously press indicated buttons on both sides of phone.

Step 5

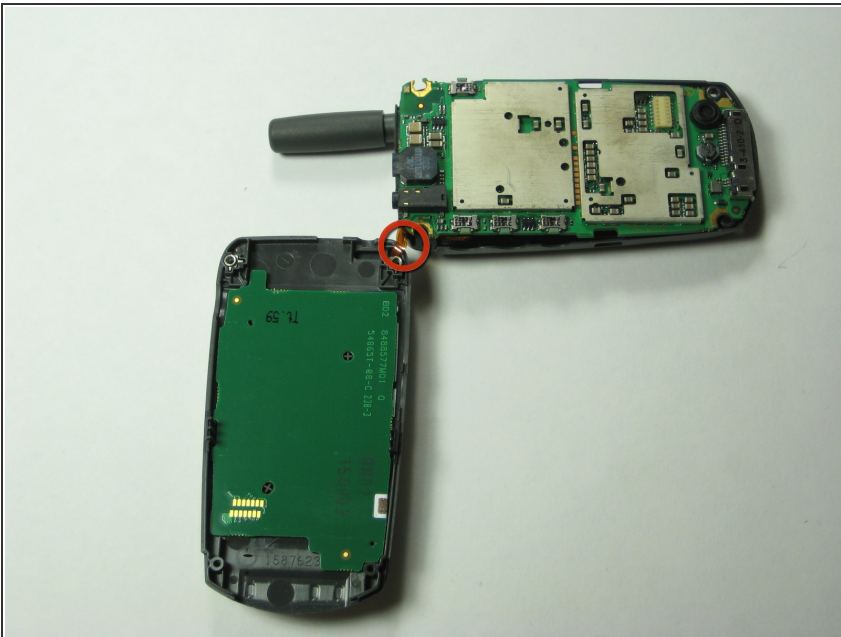

- Separate back plate from the rest of phone.
- ⚠ Make sure to not pull, there is a wire (circled on image) connecting the two plates.

To reassemble your device, follow these instructions in reverse order.