



# Motorola V60i Back Plate Replacement

Step-by-step guide to removing your Motorola V60i phone's back plate.

Written By: Elizabeth OBrien



---

## INTRODUCTION

This guide will cover the steps on how to remove the back plate of a Motorola V60i.

---

### TOOLS:

- [Spudger](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Battery



- Flip the phone over to see back cover.
- Using either finger or spudger tool press button located near the top of phone by the antenna.

## Step 2



- Pry up back plate from phone to reveal battery.
- Push button near bottom of battery using either your finger or the spudger. This will release the battery.

## Step 3 — Back Plate




- Using a T6 Torx Screwdriver, remove the four torx screws from the back of the phone.

## Step 4



- Simultaneously press the highlighted buttons on both sides of phone.

## Step 5

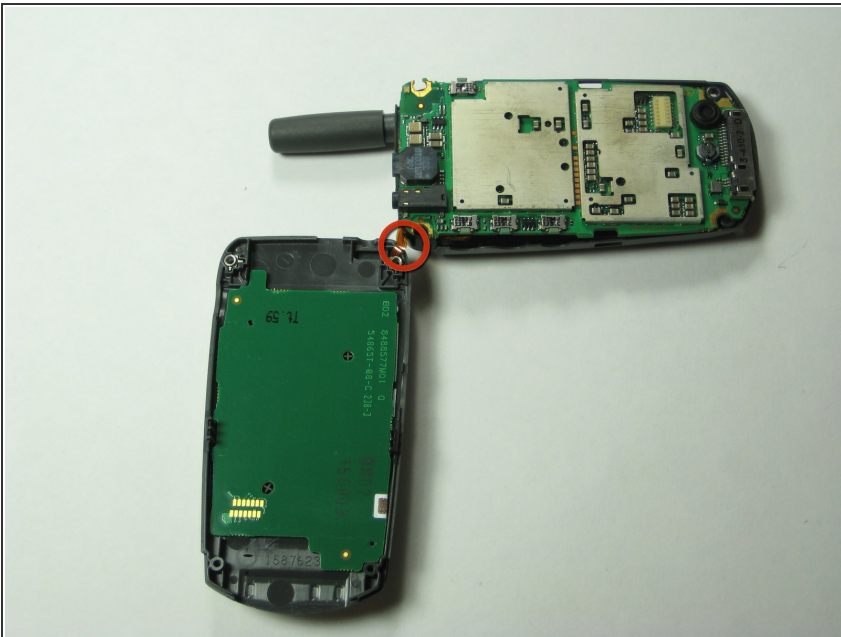

- Separate back plate from the rest of phone.
- ⚠ Do not pull the wire connecting the front and back plates.

To reassemble your device, follow these instructions in reverse order.