



Disassembling Nokia 6236i Front Casing

Written By: Erik Lindahl




INTRODUCTION

This guide will help you remove the front casing.

TOOLS:




- [Flathead 3/32" or 2.5 mm Screwdriver \(1\)](#)
-

Step 1 — Disassembling Nokia 6236i Battery

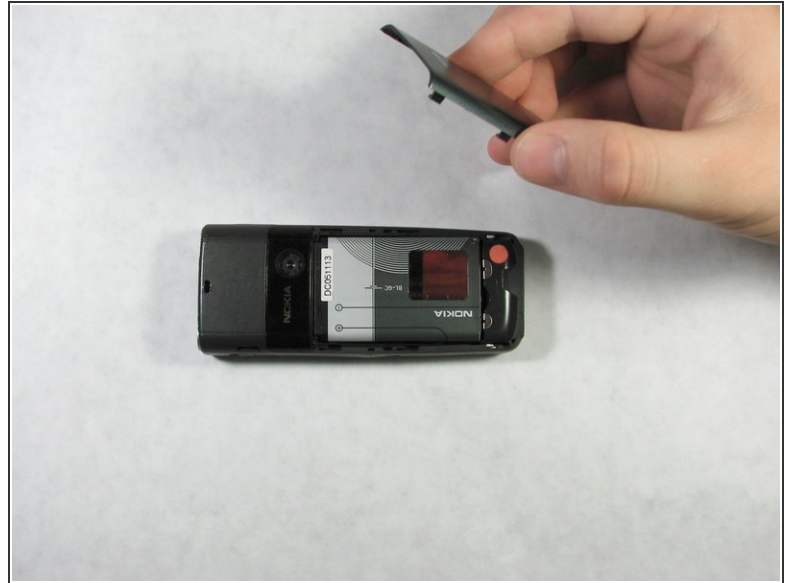


- Apply pressure to the battery casing (below the camera) with your thumb and pull towards the bottom of the phone.
- Lift the battery case off of the phone.

Step 2

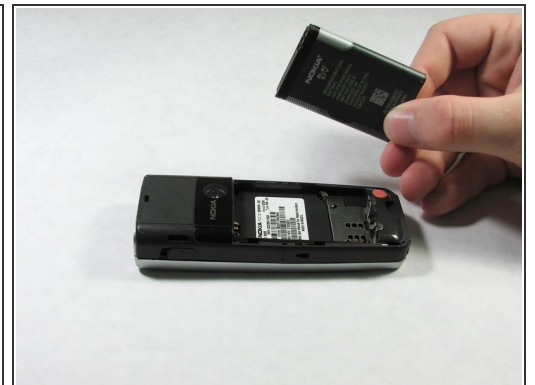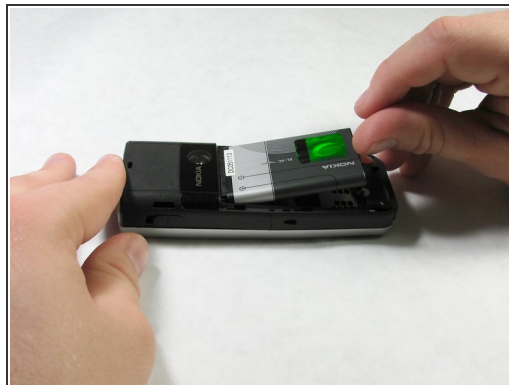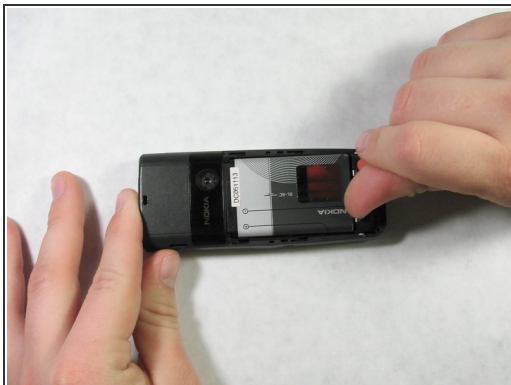

- Gently pull the battery out of the phone, using your thumb to apply pressure to the battery at the bottom of the phone.
- The battery should lift out with minimal resistance.

Step 3 — Removing Nokia 6236i Sim Card

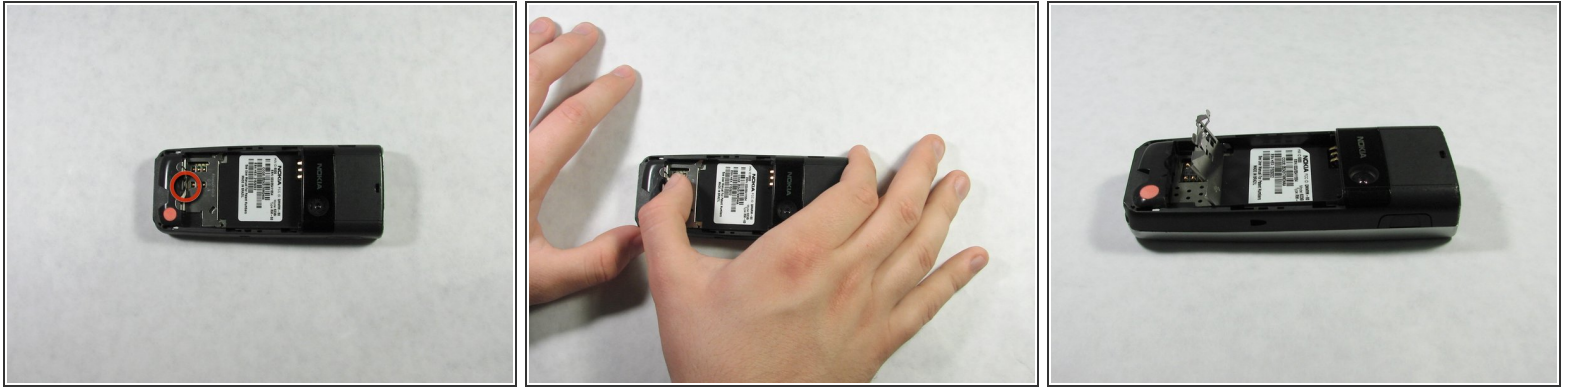

- Once you have removed the battery, pull the tab on the metal sim card cover, and lift it up.
- The sim card is underneath and can now be removed.

Step 4 — Front Casing



- Locate the notch on the bottom right corner of the phone.
- Beginning at this point, slide the head of the screwdriver between the front casing and the rest of the phone.
- Continue to slide the screwdriver towards the top edge of the phone.
- The front casing should eventually pop off.

To reassemble your device, follow these instructions in reverse order.