



Disassembling Nokia 6236i Display

Written By: Erik Lindahl




INTRODUCTION

This guide helps you remove the display from the phone.

TOOLS:




- [Flathead 3/32" or 2.5 mm Screwdriver \(1\)](#)
-

Step 1 — Disassembling Nokia 6236i Battery

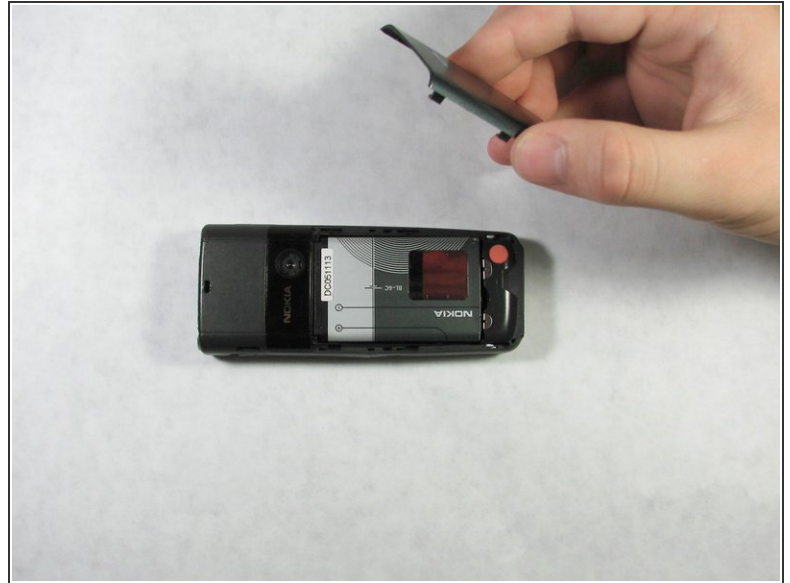

- Apply pressure to the battery casing (below the camera) with your thumb and pull towards the bottom of the phone.
- Lift the battery case off of the phone.

Step 2

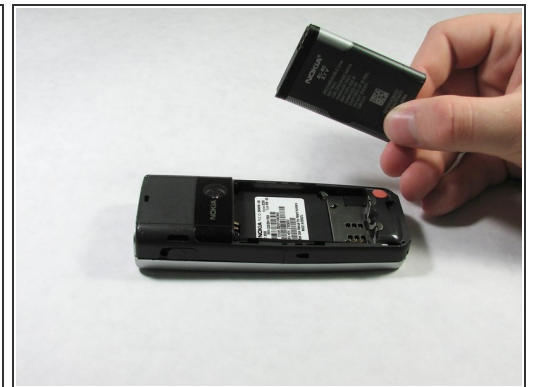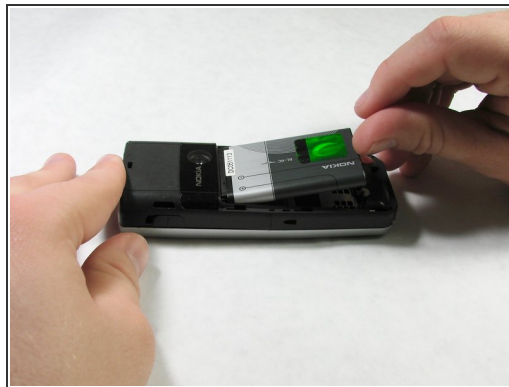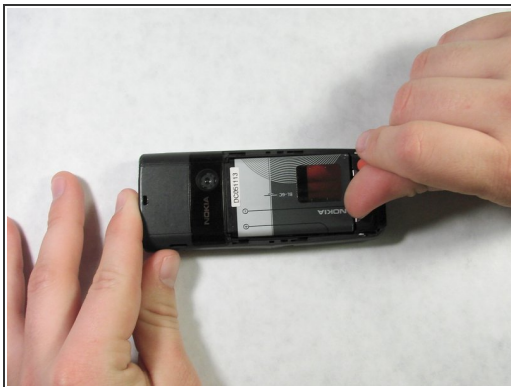


- Gently pull the battery out of the phone, using your thumb to apply pressure to the battery at the bottom of the phone.
- The battery should lift out with minimal resistance.

Step 3 — Front Casing



- Locate the notch on the bottom right corner of the phone.
- Beginning at this point, slide the head of the screwdriver between the front casing and the rest of the phone.
- Continue to slide the screwdriver towards the top edge of the phone.
- The front casing should eventually pop off.

Step 4 — Display

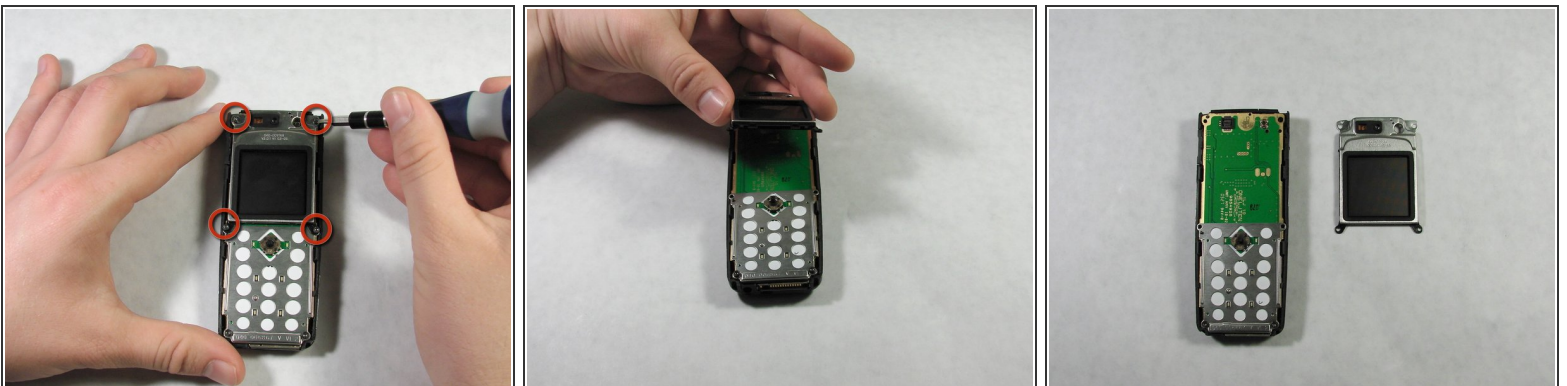

- Locate the four screws on the upper half of the phone as indicated in the photo.
- Using the screwdriver indicated, unscrew each of these four fasteners.
- The LCD screen can be easily taken off once these screws are removed.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-19 05:45:18 PM.