



# Disassembling Nokia 3395 Logic Board

Written By: Nico Lee



---

## INTRODUCTION

We will now remove the logic board from the phone.

---

### TOOLS:


- [Spudger](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Back Case



- Hold the phone and push the white button with your thumb.
- While pressing the button, slide the back plate up (towards the top of the phone) and off the phone.

## Step 2 — Disassembling Nokia 3395 Battery

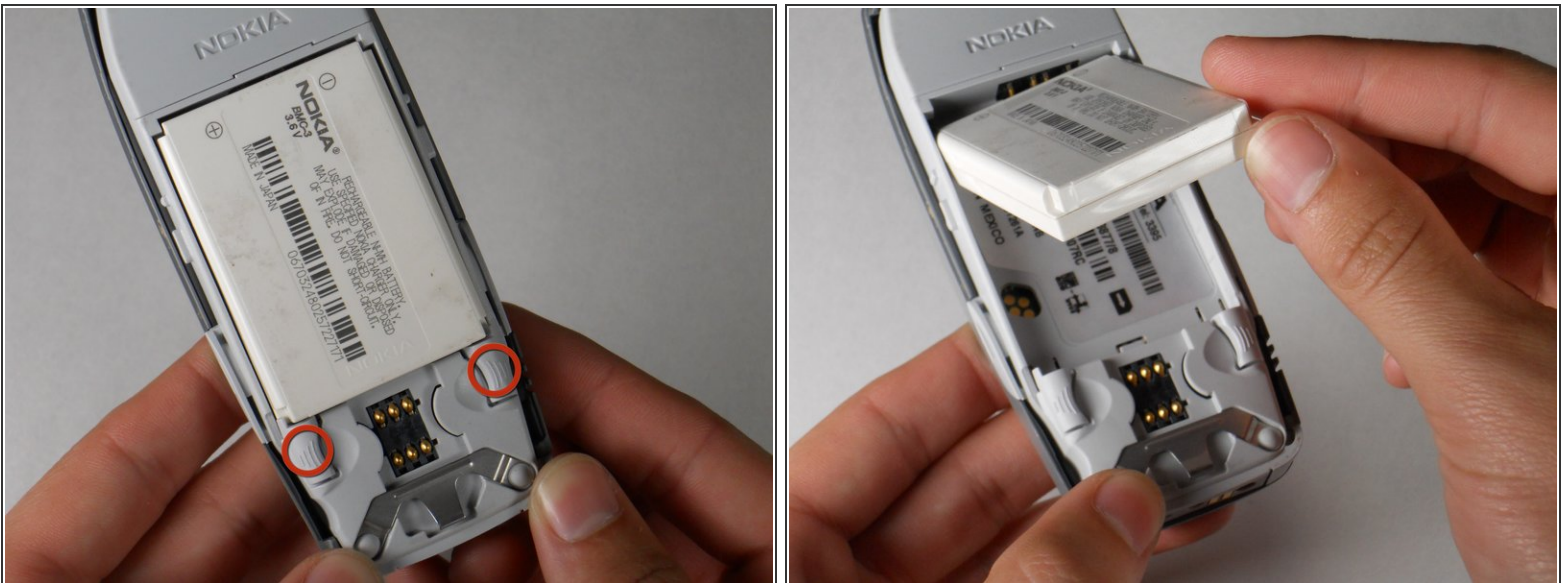

- Locate grey buttons beneath battery (shown).
- Spread buttons simultaneously away from each other and the battery will pop out.
- Remove battery from phone.



### Step 3 — Front Case





- Where shown, spread the front faceplate and push forward.
- Flip over the device, and pry the faceplate away.

### Step 4 — Screen



- Remove six T6 screws.



## Step 5

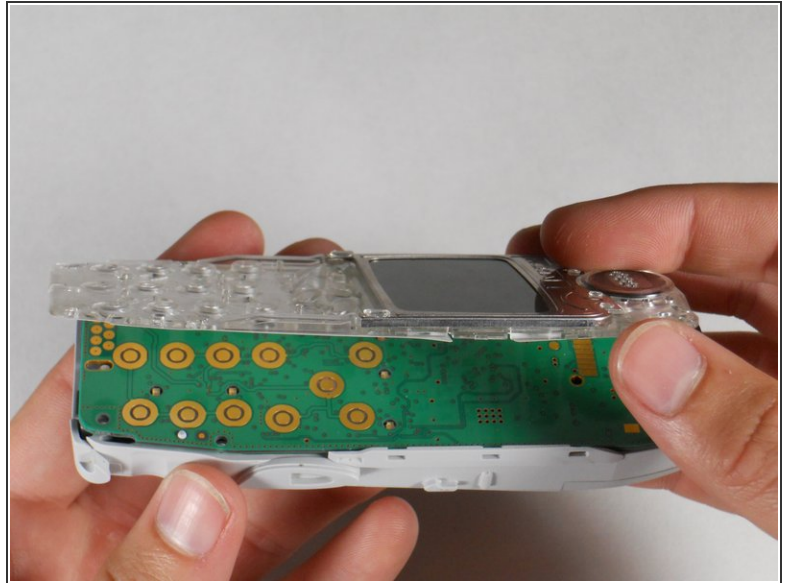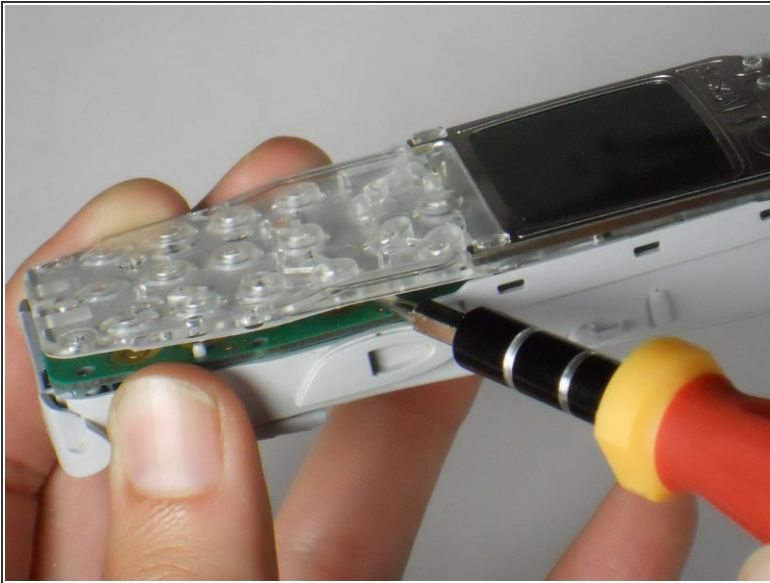

- Insert spudger between screen assembly and phone body.

⚠ Spread apart as shown. Avoid damaging the screen assembly by removing the screen slowly.

## Step 6 — Logic Board

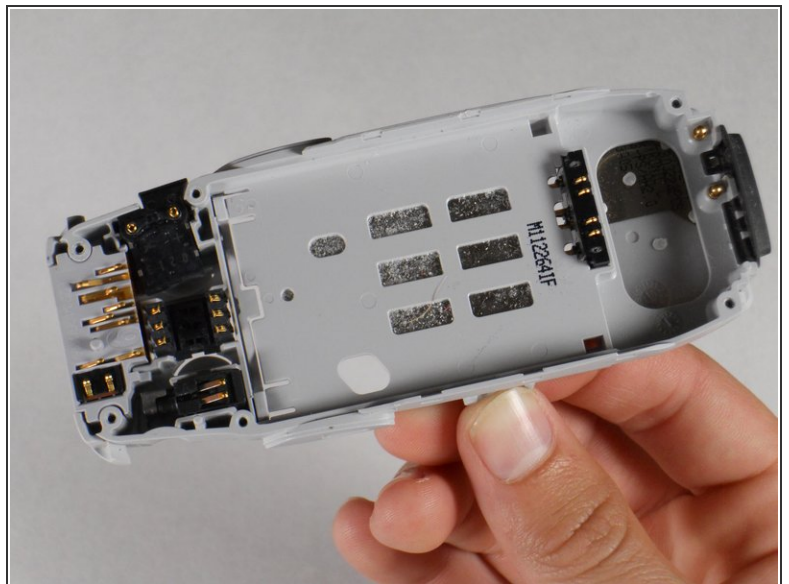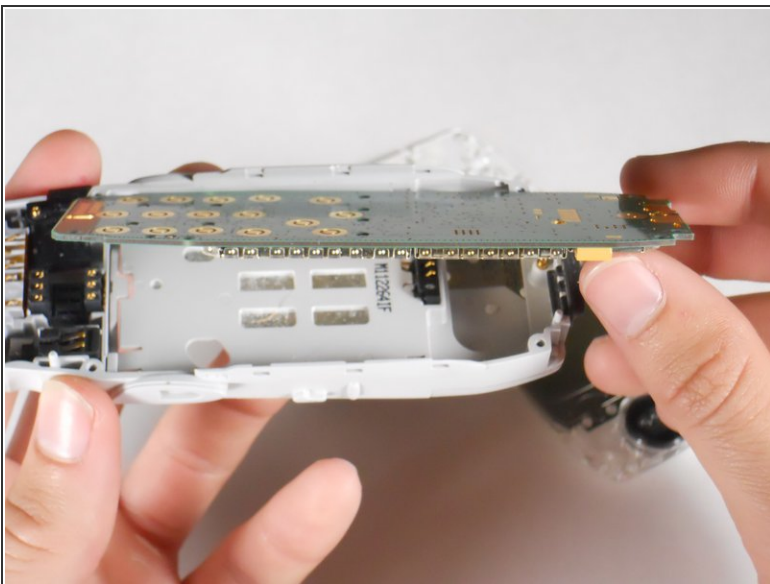

- Remove logic board as shown.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-19 07:29:38 AM.