




Disassembling Nokia 3395 Screen

Written By: Nico Lee

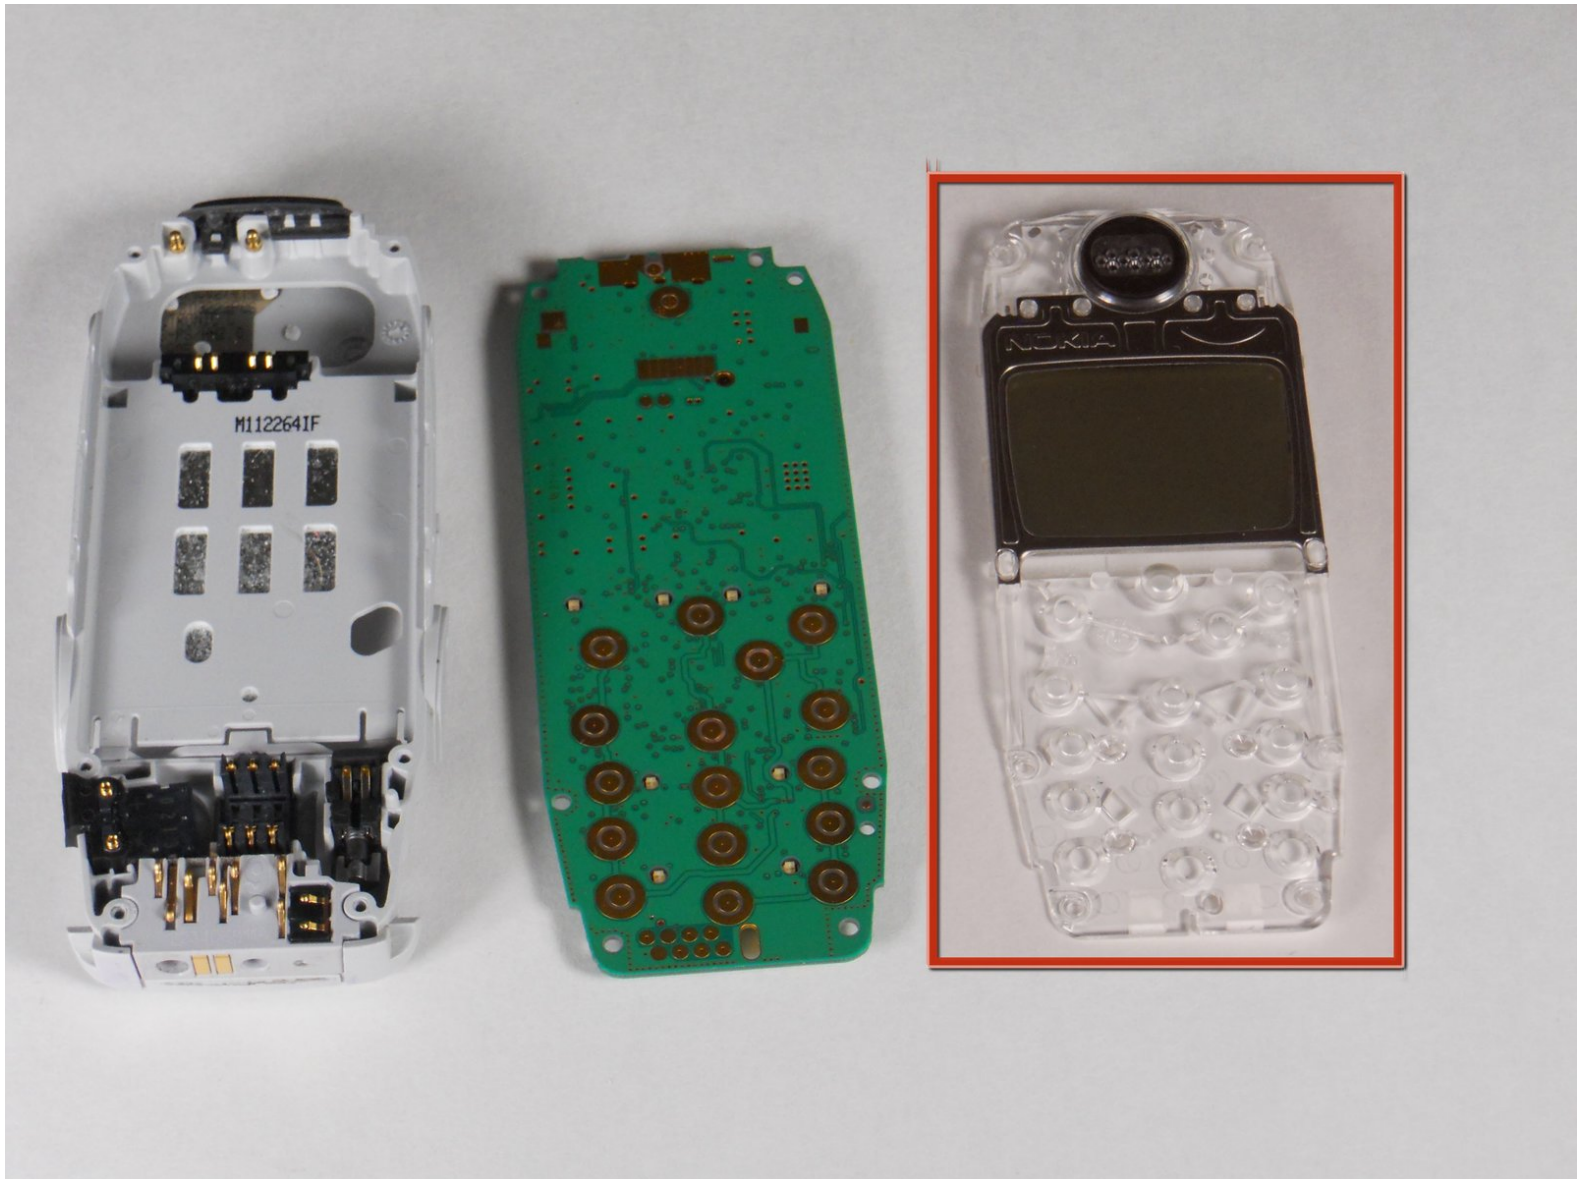

INTRODUCTION

Removing the screen.

TOOLS:


- [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Back Case



- Hold the phone and push the white button with your thumb.
- While pressing the button, slide the back plate up (towards the top of the phone) and off the phone.

Step 2 — Disassembling Nokia 3395 Battery

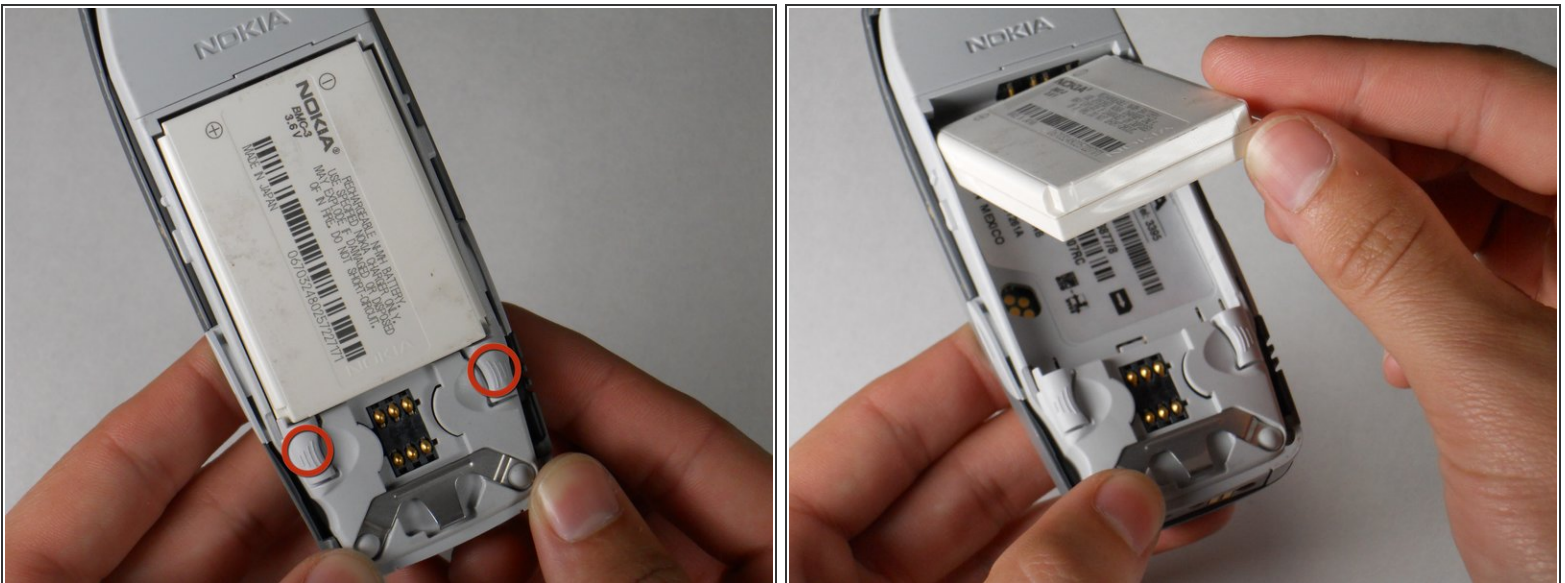

- Locate grey buttons beneath battery (shown).
- Spread buttons simultaneously away from each other and the battery will pop out.
- Remove battery from phone.

Step 3 — Front Case





- Where shown, spread the front faceplate and push forward.
- Flip over the device, and pry the faceplate away.

Step 4 — Screen



- Remove six T6 screws.

Step 5

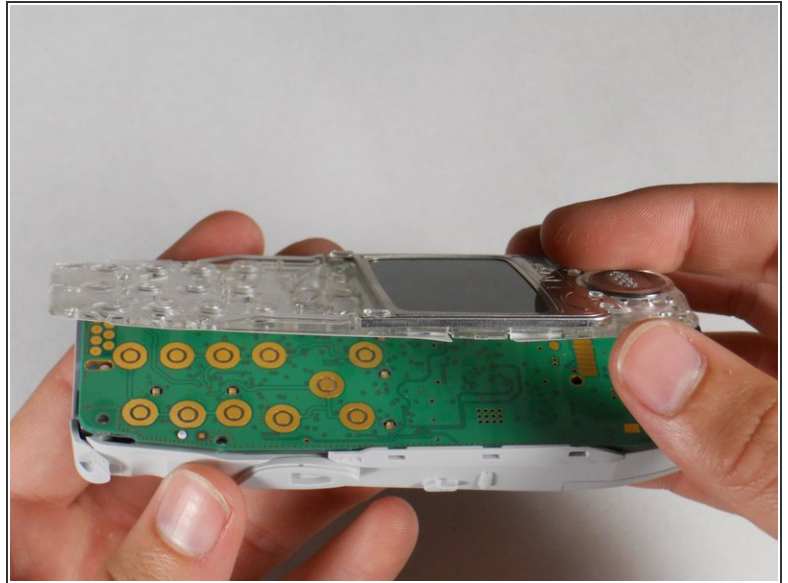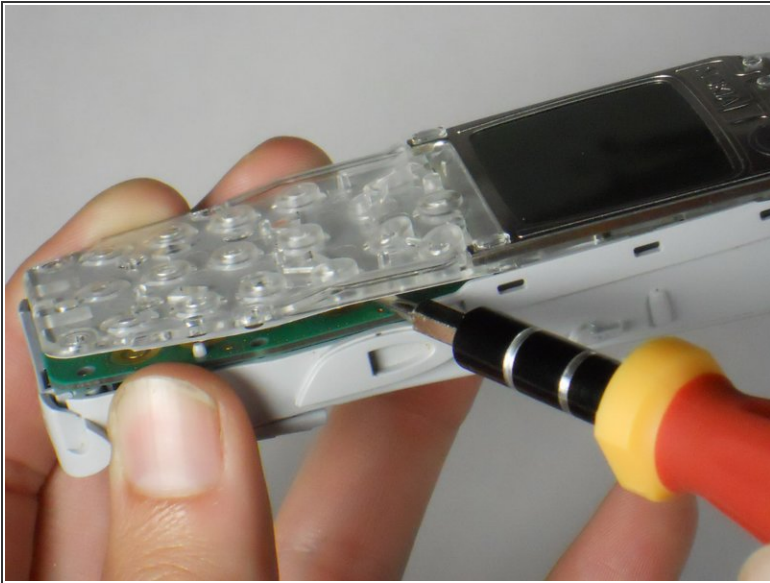

- Insert spudger between screen assembly and phone body.

⚠ Spread apart as shown. Avoid damaging the screen assembly by removing the screen slowly.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-23 11:36:08 PM.