




# Sony Vaio PCG-7A2L RAM Cover Replacement

Written By: Brian Marchini

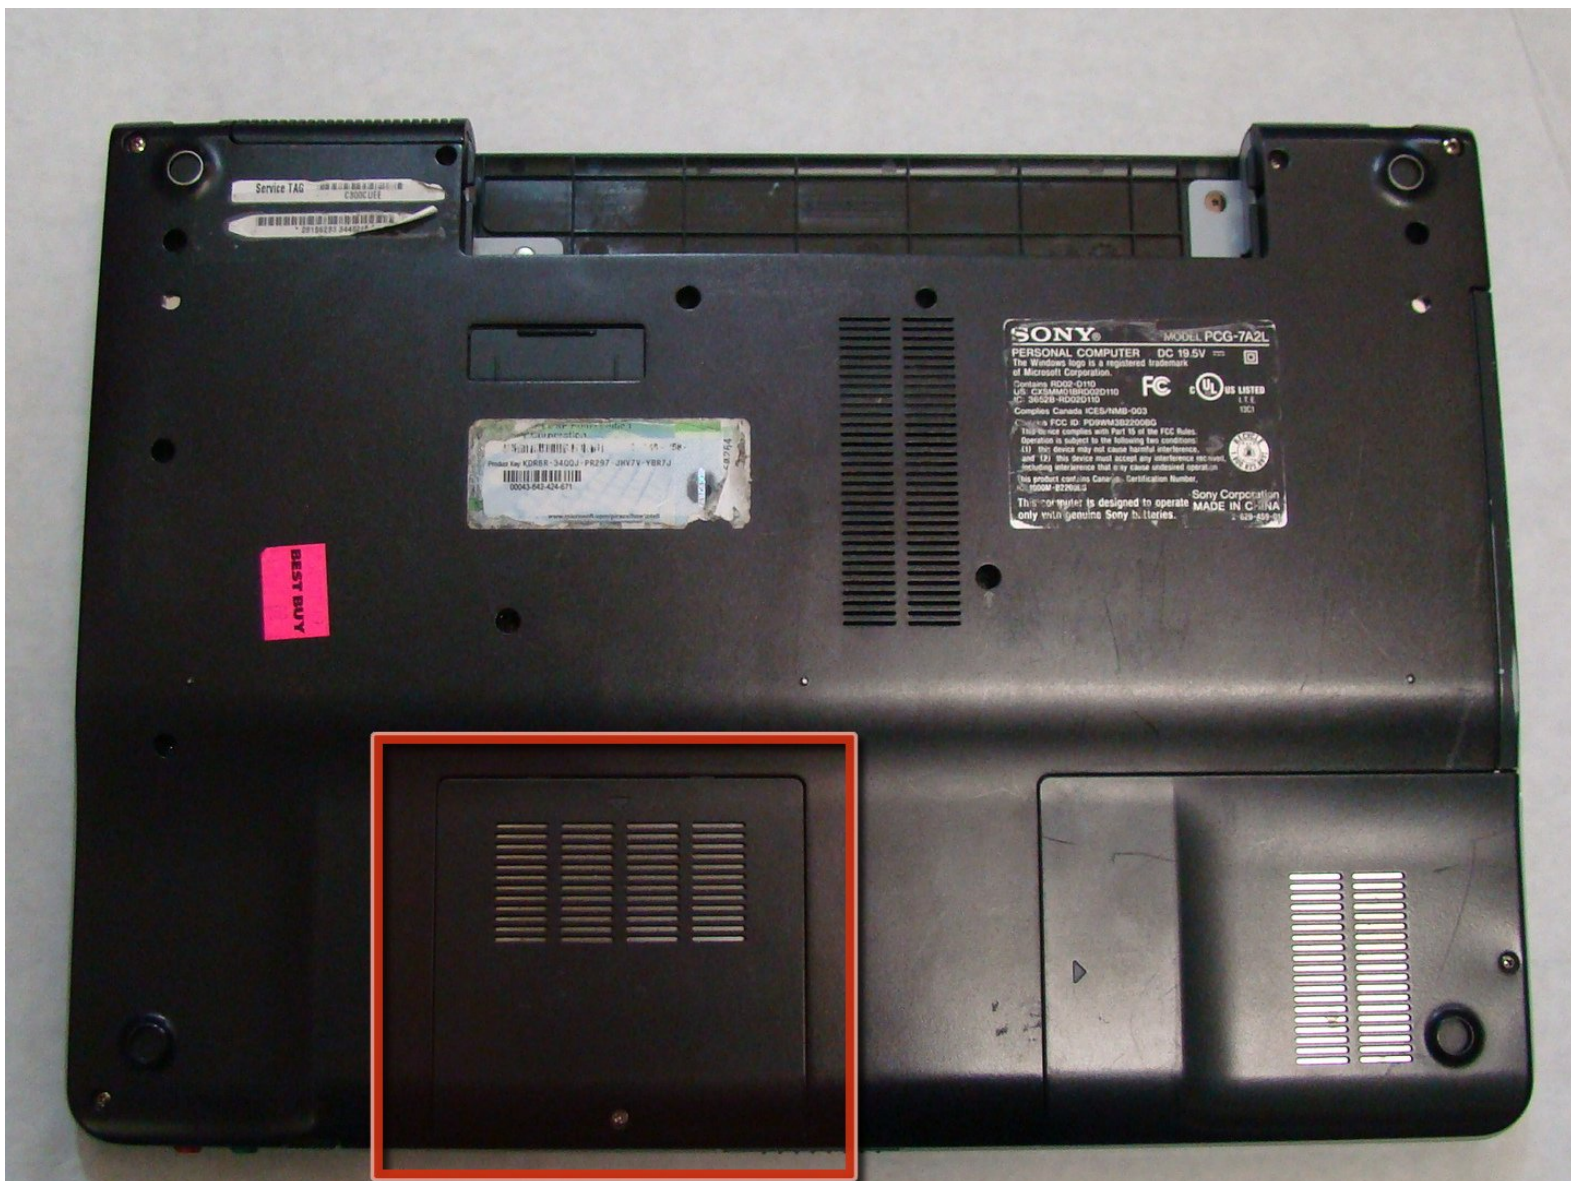

---

## INTRODUCTION

This guide helps users remove the plastic panel that covers the RAM compartment of the Sony Vaio PCG-7A2L laptop.

---

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Battery



- Lay the closed laptop on its screen so the bottom is facing towards you.

## Step 2



- Push both latches towards the center of the battery.





## Step 3




- Remove the battery by pushing it away from the laptop.
- Set the battery away from the laptop.

## Step 4 — RAM Cover

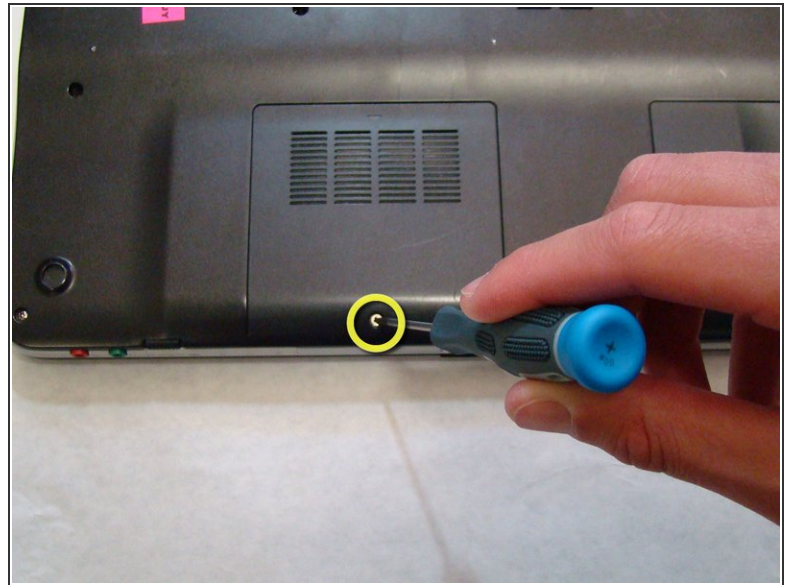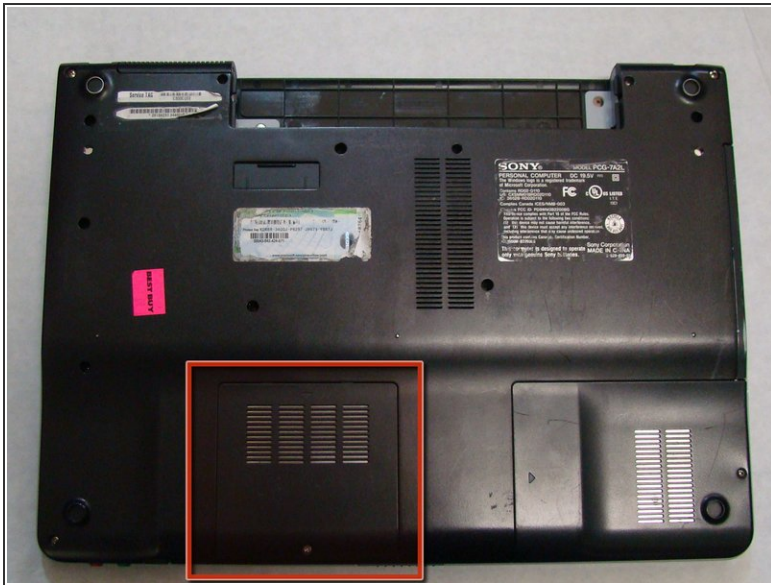

- With the bottom of the laptop facing up, locate the RAM cover.
- The RAM is covered by the panel with four columns of vents.
- Locate the screw (Length: 4.8 mm) holding down the panel, which is near the edge of the laptop. Unscrew it with your phillips #0 screwdriver.

## Step 5

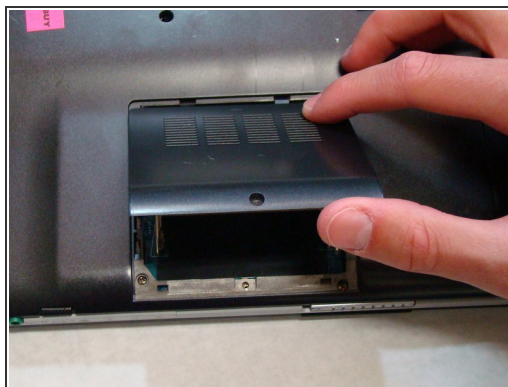

- Use your fingers to slide the cover away from the laptop. (It will only slide a few millimeters)
- Once the panel is out of its locked position, it can be lifted out without any resistance.

To reassemble your device, follow these instructions in reverse order.