



LG VX4500 Rear Cover Replacement

Removing the back part of the case.

Written By: Matthew Hagan



INTRODUCTION

Shows how to remove the rear case to access all of the internals of the phone.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [Tweezers](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Turn the closed phone so that the back panel is facing you.
- Press down and forward firmly on the gray tab in the middle of the phone.

Step 2




- Now just lift up on the battery and remove it from the phone.

Step 3 — Rear Cover



- Remove the rubber grommet using a Spudger.


Step 4

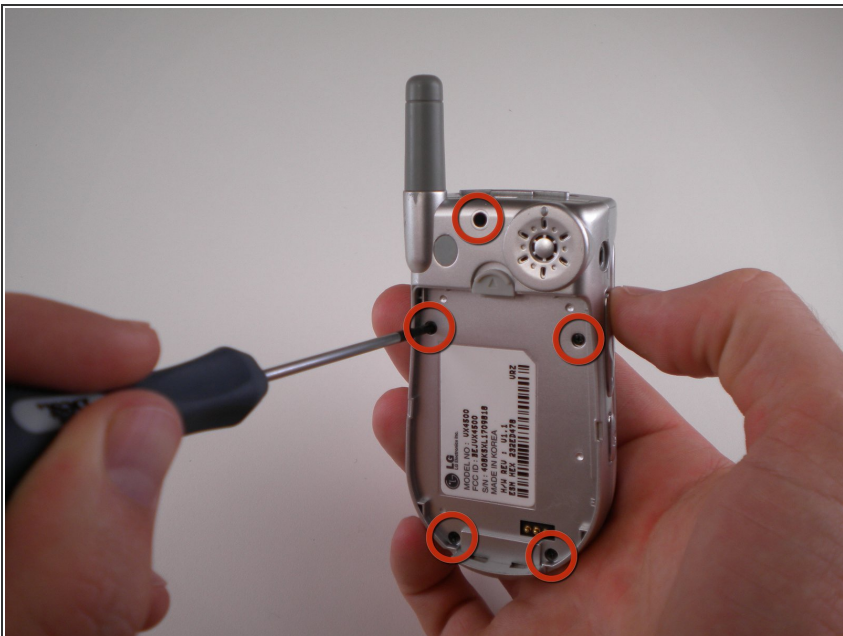

- ⚠ Be sure not to lose the screws. They are small!
- Remove the five screws using a Phillips #00 Screwdriver.

Step 5



 When removing back cover, be careful not to break the speaker wires.

- Using an iPod Opening Tool, carefully pry off the back cover.
- Using Tweezers, gently pull speaker wires out.

Step 6



- Separate the two halves.

To reassemble your device, follow these instructions in reverse order.