




# Spy Net Ultra Vision Goggles Lens Replacement

This guide will illustrate how to replace the lens.

Written By: Andrew Gittens

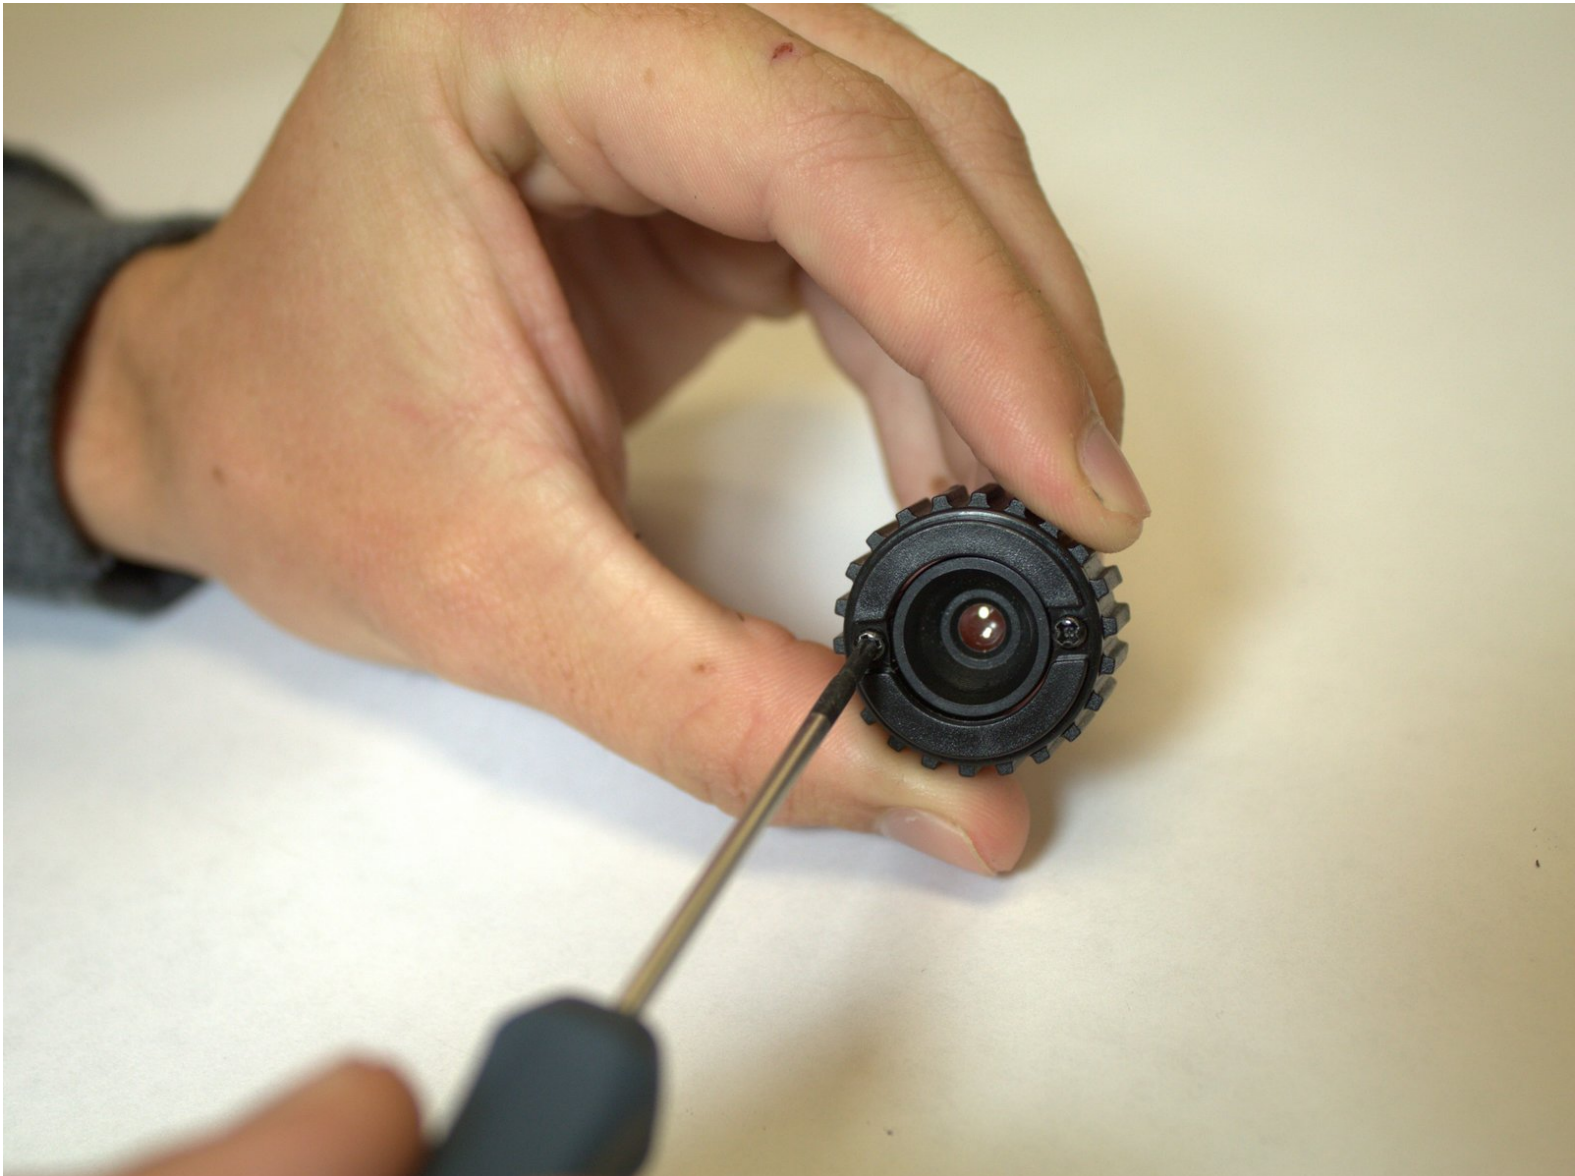

---

## INTRODUCTION

If when looking through the the goggles the image is blurred or distorted there is a chance this is due to a smudged or damaged lens. This guide will illustrate how to remove the lens to clean or replace it. For more information on smudged or damaged lens refer to the troubleshooting page. Link:[Spy Net Ultra Vision Goggles Troubleshooting](#)

---

### TOOLS:



- [Phillips #0 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Opening the Device





- Remove the six silver 11.4 mm Phillips #0 screws and pry open the device, using the plastic opening tools if necessary. To do this, locate the grooves running along the side of the entire device and wedge it open.

## Step 2 — Remove the Lens Housing

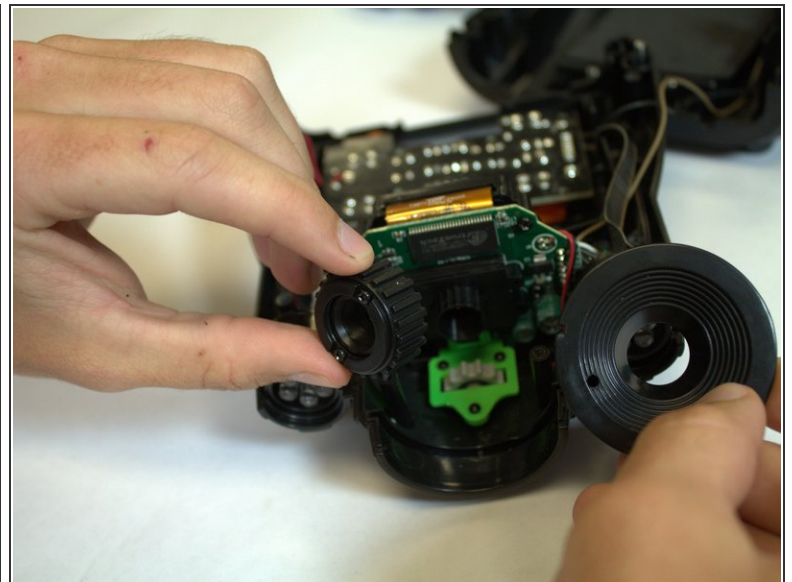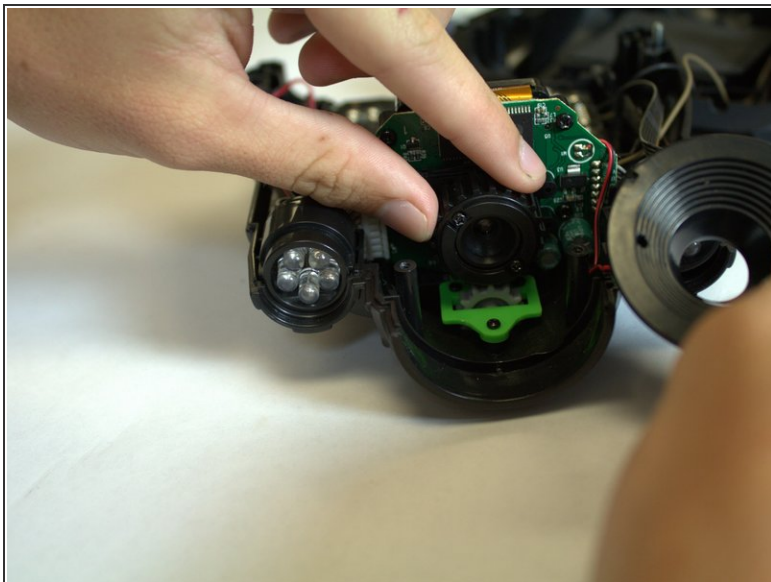

- Once the device is open, remove the lens tunnel, then twist the lens to unscrew it from the camera.

### Step 3

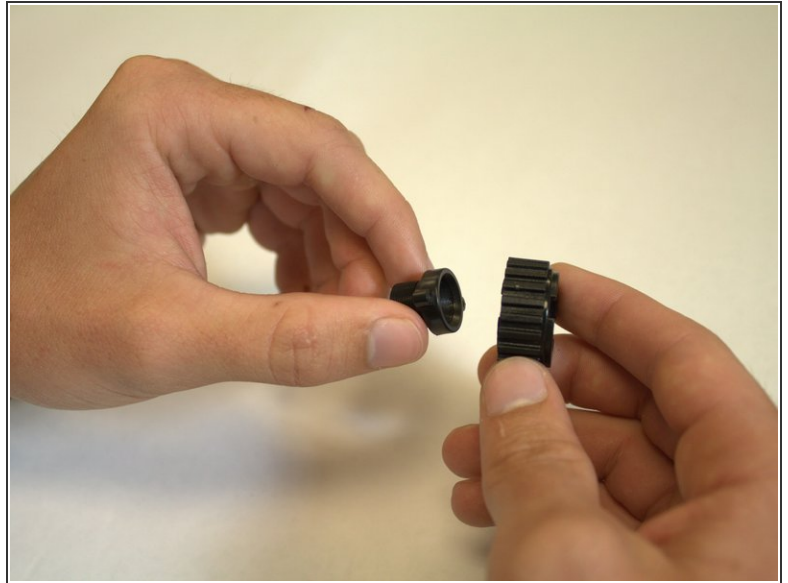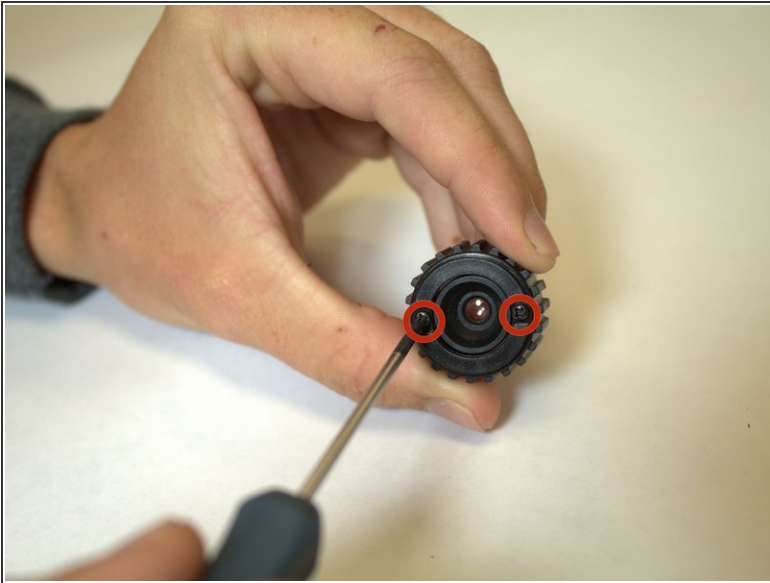

- Remove the two black 7.15 mm Phillips #00 screws from the lens.
- Once the screws are out, the lens casing should pull apart.

To reassemble your device, follow these instructions in reverse order.