



# HTC One Max Back Case Replacement

Replace the back case on your HTC One Max.

Written By: Andrew Keller



## INTRODUCTION

Use this guide to replace the back case on your HTC One Max.

---

### TOOLS:


- [Spudger](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
  - [Tri-point Y00 Screwdriver Bit](#) (1)
-

## Step 1 — Back Case



- Lift back cover while pressing highlighted release switch towards the center of the phone.

## Step 2

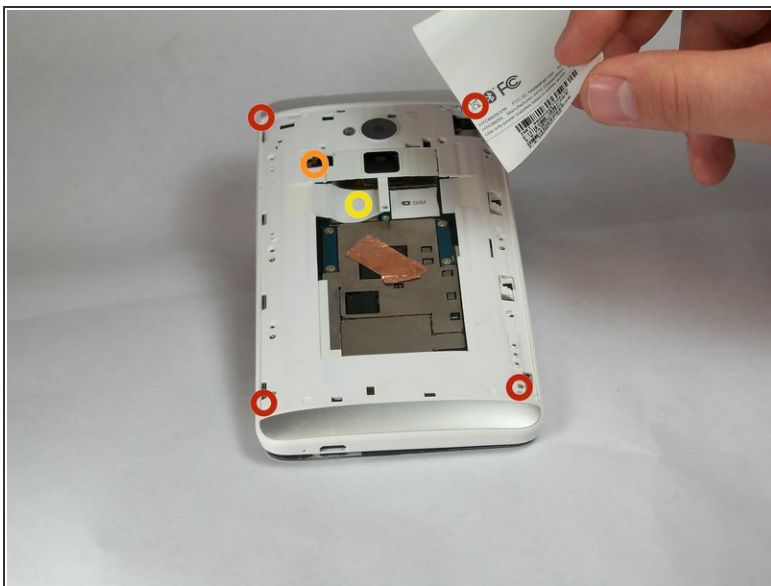



- Remove the four white stickers in each corner that cover the Tri-Wing screws.
- Remove the white sticker near the buttons that control the volume.
- Remove the white sticker near the SIM card.
- Remove the big white sticker with the bar-code in the center of the phone.

### Step 3



- Remove the thirteen Tri-Wing Y00 screws (Upper & Lower screws are 5 mm length, middle screws are 3.8 mm length) from the back case.
- Disconnect the cable near the volume buttons.

### Step 4

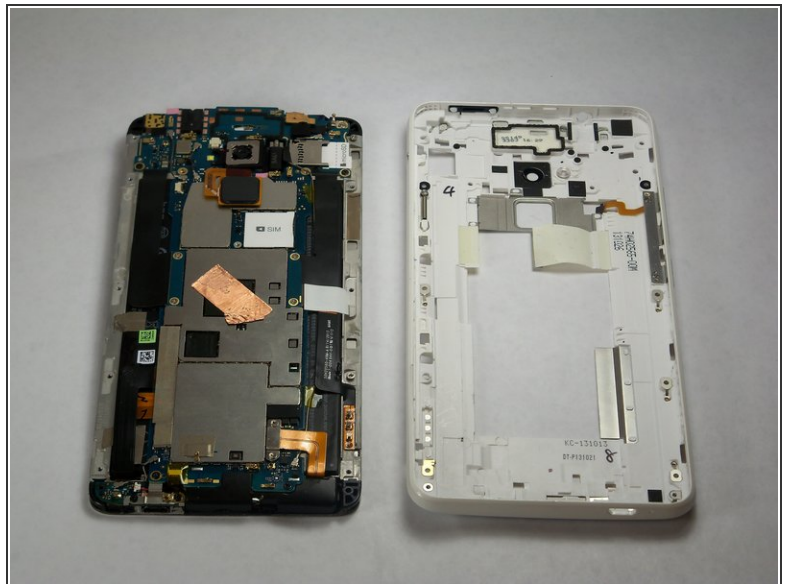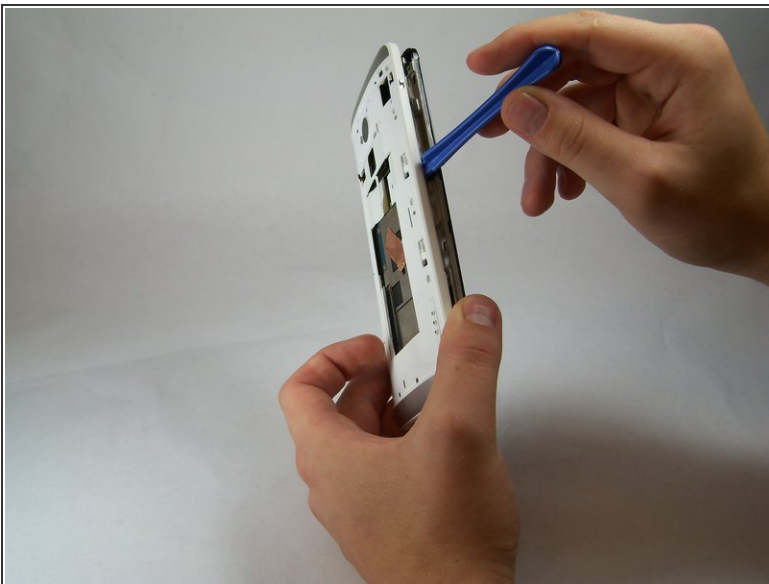

- Use the small plastic opening tool to pry between the screen and the rear case.

To reassemble your device, follow these instructions in reverse order.

