



# DualShock 3 Motherboard Assembly Replacement

Written By: Andrew Bookholt



 **TOOLS:**



- Phillips #00 Screwdriver (1)

## Step 1 — Motherboard Assembly



- Remove the single 7.2 mm Phillips screw securing the motherboard to the front cover.


## Step 2

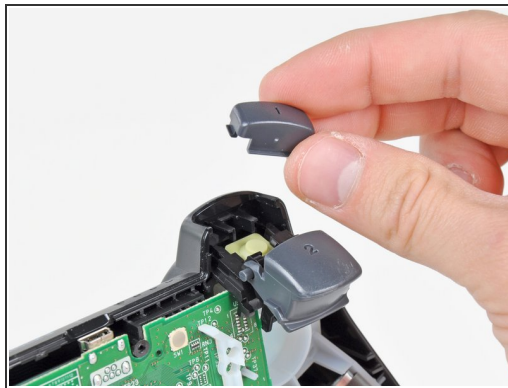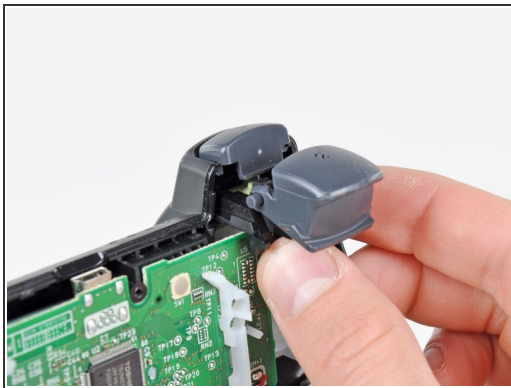

- Slide the trigger button retainers slightly away from the front cover.
- Remove the #1 button on both sides.



### Step 3

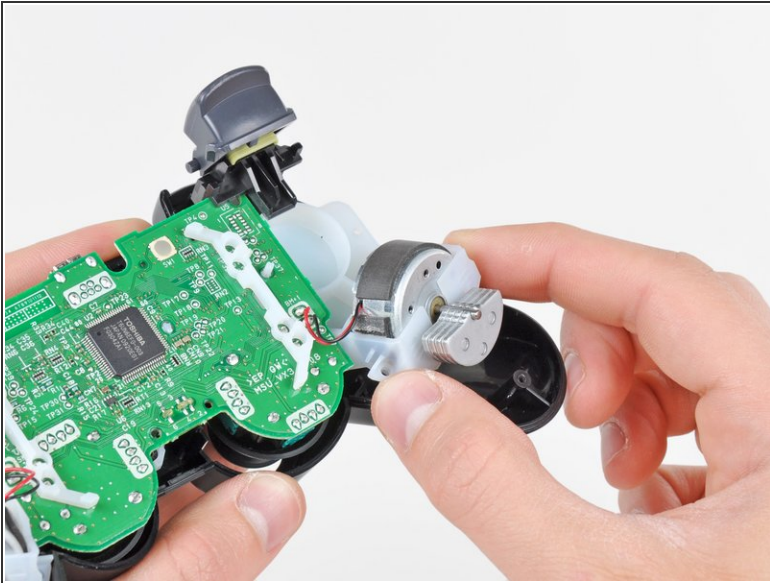

- Pull the vibration motor retainers away from the front cover to dislodge the motherboard assembly.

### Step 4



- Remove the motherboard assembly from the front cover.
- ⓘ When removing the motherboard assembly, try not to tilt the front cover upside down as the buttons and their covers may fall out.

To reassemble your device, follow these instructions in reverse order.