



# Canon EOS 5D Mark II Battery Replacement

This guide will show users how to replace the battery.


Written By: Mike Seed



## INTRODUCTION

This guide will show users the first step of performing a hard reset, removing the battery.

## Step 1 — Battery

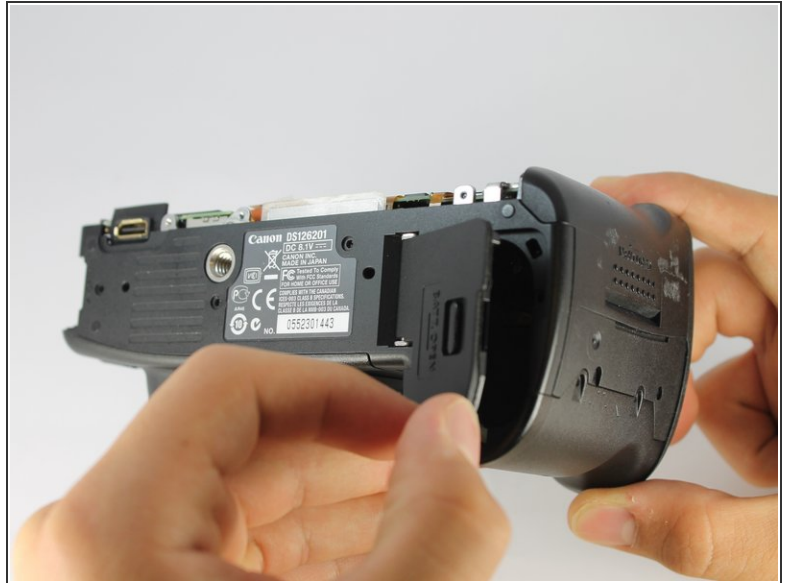

- Open the battery flap by pressing the button on the flap in a direction parallel to the bottom of the device while also pulling away from the device.

## Step 2



- Free the battery by pressing the white lever away from the battery.
- Pull out the now loose battery.
- ⓘ If you are performing a hard reset, the next step is to follow the backup battery replacement guide.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2020-11-26 05:41:00 PM (MST).

