




# Asus PadFone S Rear Facing Camera Replacement

This guide will show you how to replace the back camera of your PadFone S.

Written By: Christian Trippe

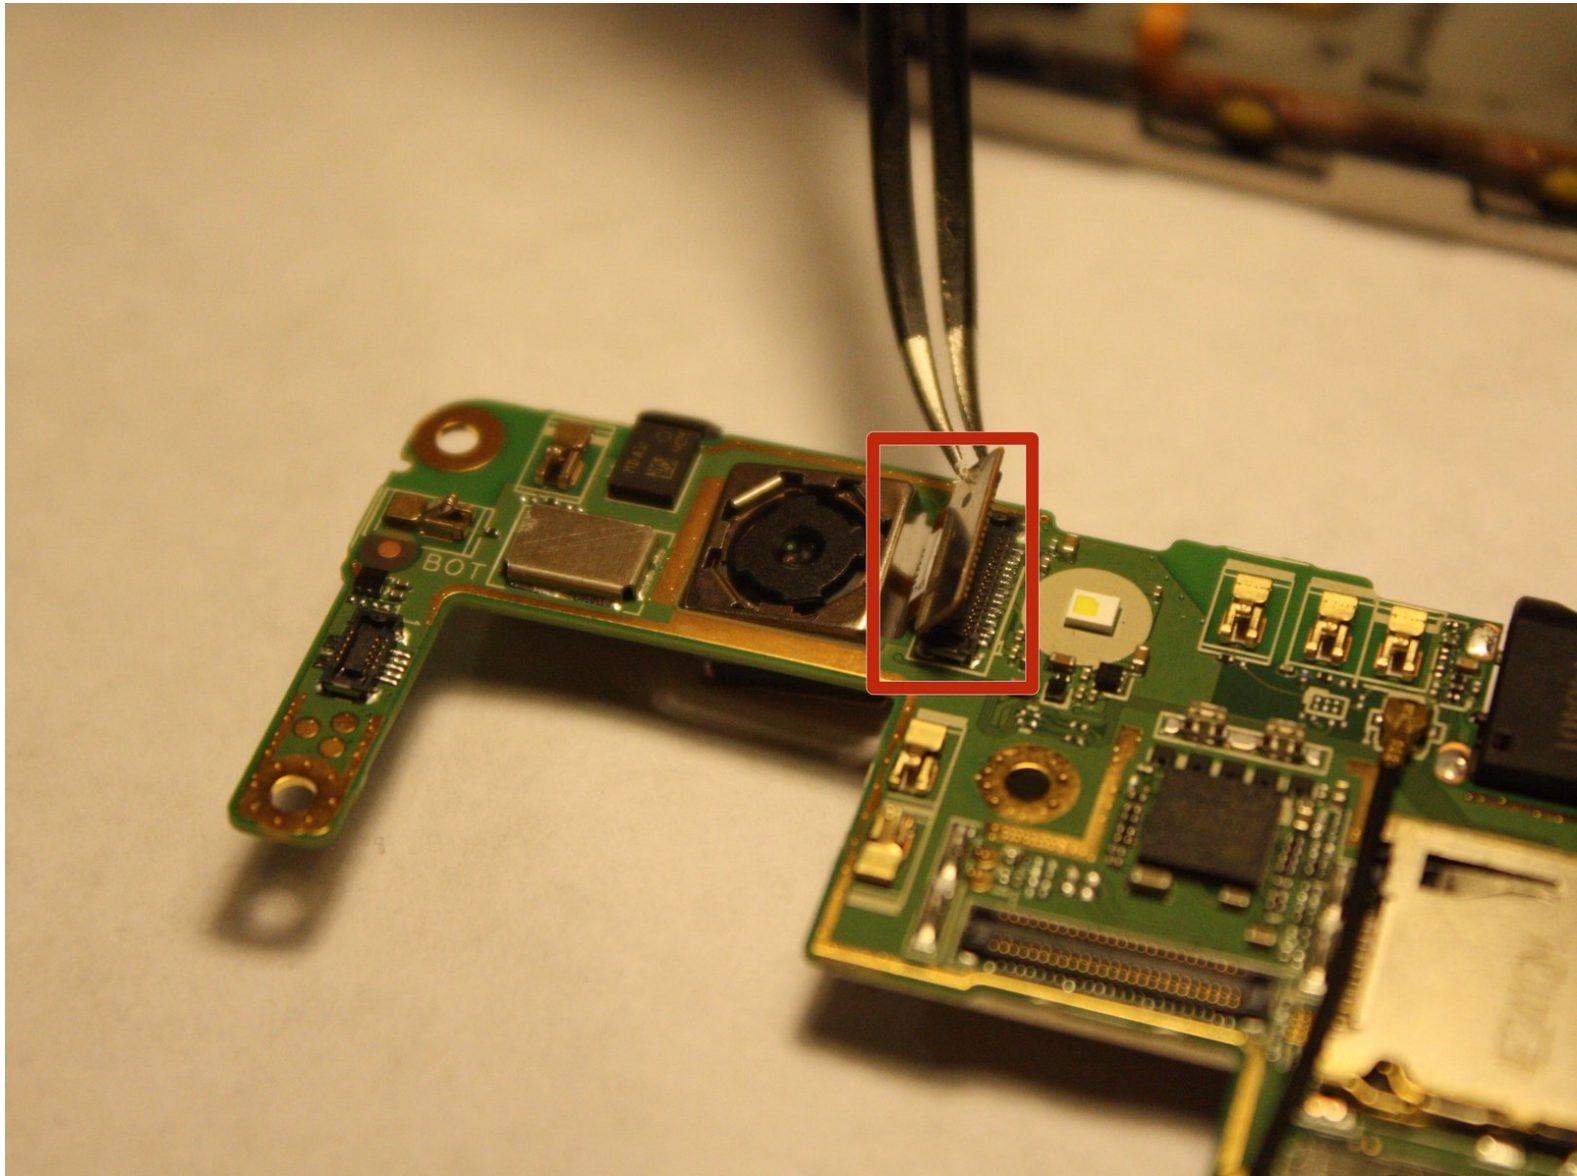

---

## INTRODUCTION

This guide will show you how to remove the back camera of your Asus PadFone S. There are 3 moderate steps to this guide that require some precision and patience. This guide will make it easy to replace a broken or damaged back camera to get your phone working again. Some common tools are required for this replacement so make sure you have them before you start.

---

### TOOLS:

- [Tweezers](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Remove Back Cover




- Place your thumb in the charging port and pry the back cover off of the phone.
- Separate cover all the way around the sides of the phone.

## Step 2 — Remove Back Panel



- Remove all the screws on the back panel using a T5 Torx screwdriver.
- Lift the back panel off to reveal the logic board and battery.

### Step 3 — Remove Back Camera

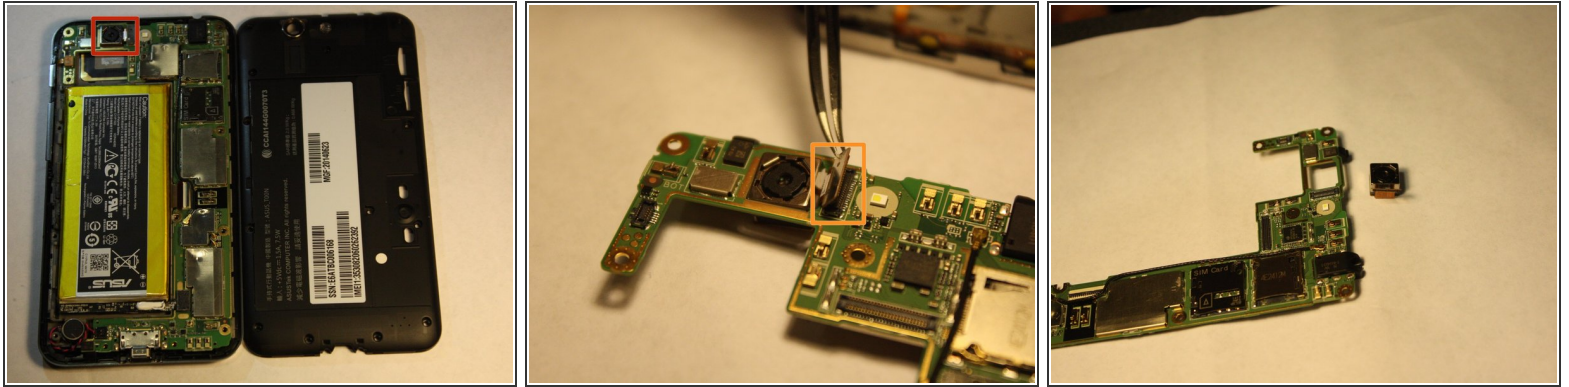

- The back camera is located at the top left on the logic board.
  - Use tweezers to lift back camera strip from logic board.
  - Lift back camera out of logic board.
- i** It is not necessary to remove logic board for removal of the back camera.

To reassemble your device, follow these instructions in reverse order.