



Motorola Moto G 1st Generation Front Camera Replacement

Use this guide to replace the Front Camera of your phone.

Written By: Radostin Lobodov



 **TOOLS:**

- [iFixit Opening Tools](#) (1)
 - [T5 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Rear Panel



i Before you start following any of the steps of this guide, completely turn the device off.

- Take the plastic back cover off by either using a plastic Pry tool or simply using your hands. Start from the bottom by the charging port

Step 2 — Removing the Screws




- Unscrew the 3.5mm screws, total of 14, located on the back protective cover by using a T5 Torx screwdriver.

Step 3 — Removing the Battery Cover



- Use a plastic opening tool to remove the protective cover.
- ⚠ Carefully work the plastic tool around all the edges of the phone.
- ⓘ The protective cover holds the Volume and the Home buttons which might fall off the assembly when the cover is removed.

Step 4 — Disconnecting the Front Camera

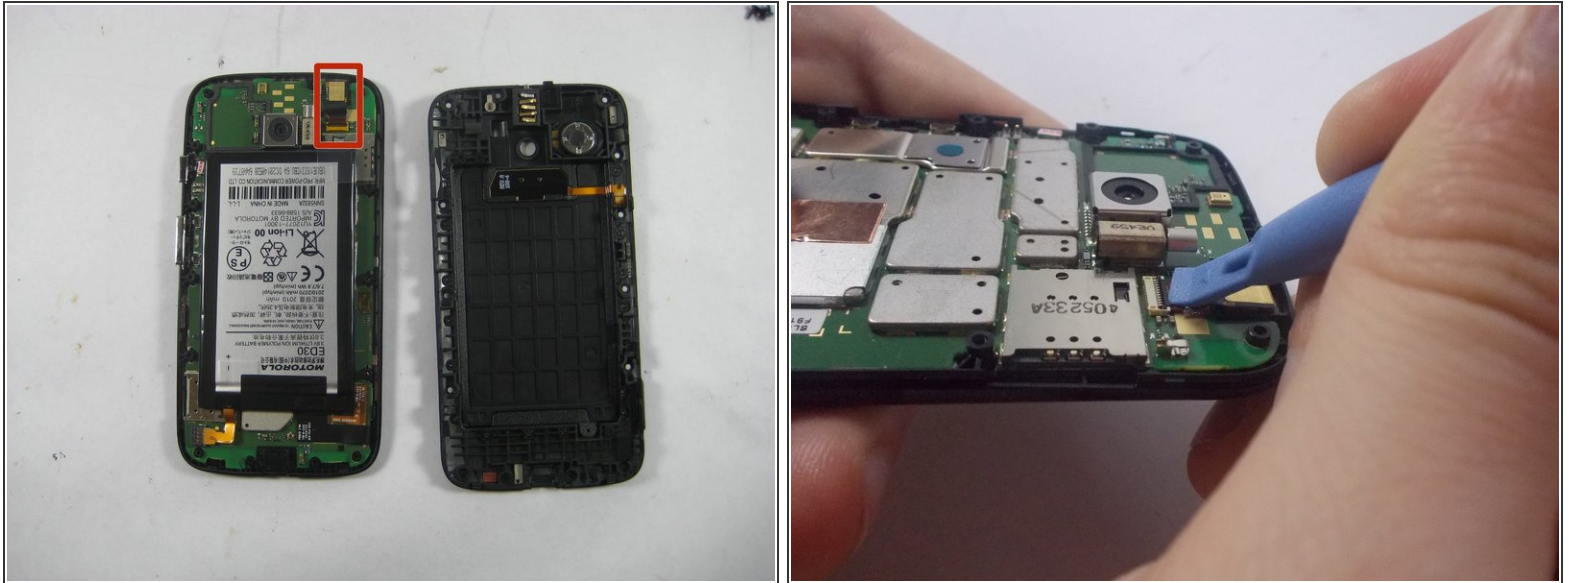

- Use the Pry tool to disconnect the Front Camera, found in the upper right corner, from the motherboard.
- ⓘ You want to pry up the black tab that locks it in place. It may be under a protective sticker.
- ⓘ Though the battery is removed in our second photo, it is not required for removing the front camera.

Step 5 — Removing the Front Camera



- Remove the camera from the phone by using the tweezers.
- To reassemble, follow the steps in reverse.

To reassemble your device, follow these instructions in reverse order.