



Asus V6800V Hard Drive Replacement

replacing hardware

Written By: Jong Park



 **TOOLS:**

- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Hard Drive




- Remove the two highlighted screws.

Step 2



- Pry open case at highlighted area.
- ⓘ Actual hard drive is not shown in the image.

Step 3

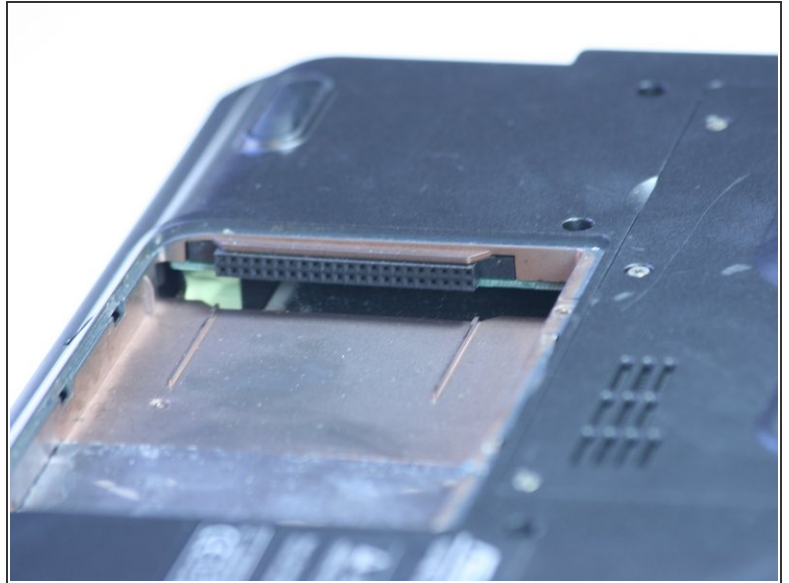

- Pull out hard drive laterally from slot shown.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-22 07:34:21 AM.