



# iPad Mini 3 Left Antenna Cable Replacement

Prereq to peel the left antenna cable.

Written By: Sam Goldheart



---

## INTRODUCTION

Prereq only.

---

### TOOLS:

- [Spudger](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Left Antenna Cable




- Remove the following Phillips #00 screws from the left antenna:
  - One 2.6 mm screw
  - Two 1.5 mm screws

## Step 2



- Use the flat end of a spudger to loosen the foam adhesive securing the Wi-Fi antenna to the left speaker.

### Step 3

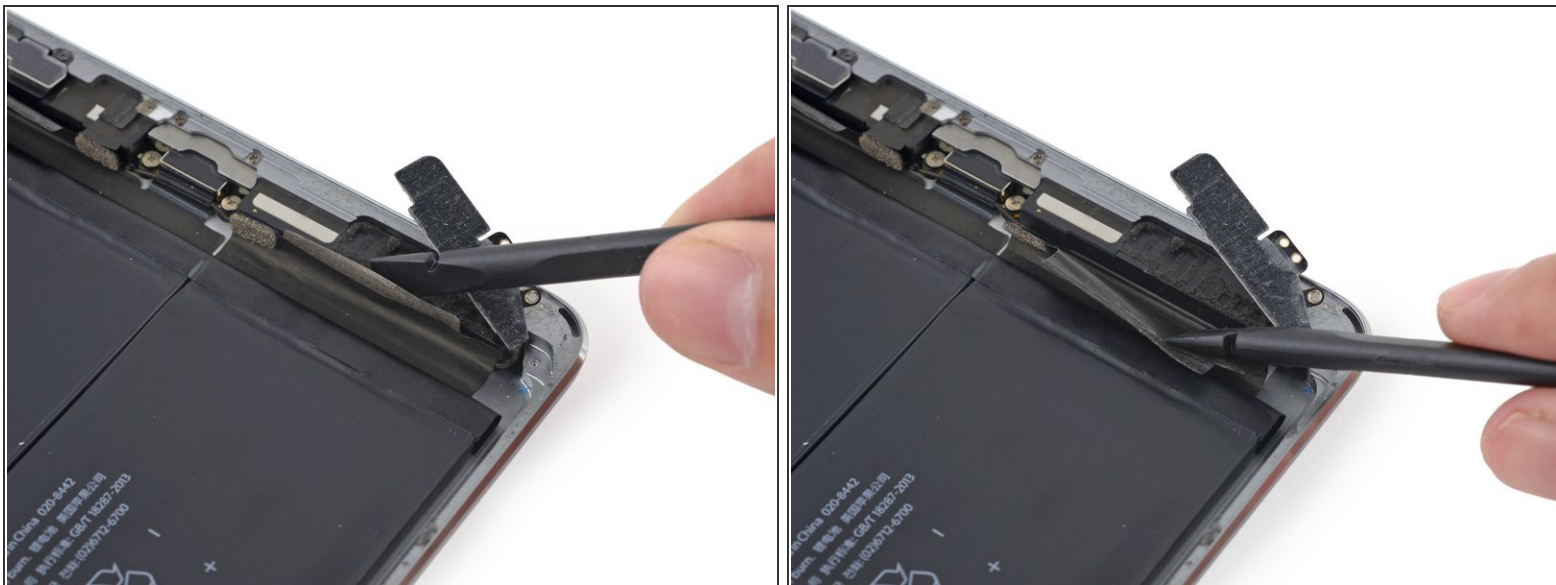

- Use the flat end of a spudger to fold the wide left-hand piece of tape away from the left speaker.

### Step 4



- Use the tip of a spudger to pry the antenna cable tape up from the rear case of the iPad.
- Gently pull the antenna cable out of the way as you work along the piece of tape to free it and keep it from resealing.



## Step 5



- Pull the antenna cable from the clip behind the Lightning connector.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-08-23 02:07:02 AM.