



# iPad Mini 3 Left Antenna Cable Replacement

Prereq to peel the left antenna cable more.

Written By: Sam Goldheart



---

## INTRODUCTION

Prereq only.

---

### TOOLS:


- [Tweezers](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Left Antenna Cable




- Pull the wide tape toward the battery, applying constant force to peel it from the antenna cable lodged between it and the speaker.
- Insert a plastic opening tool into the gap between the wide tape and the antenna cable, to break the adhesive connecting the two.
- Slide the plastic opening tool along the length of the antenna cable to completely separate it from the piece of tape.

## Step 2

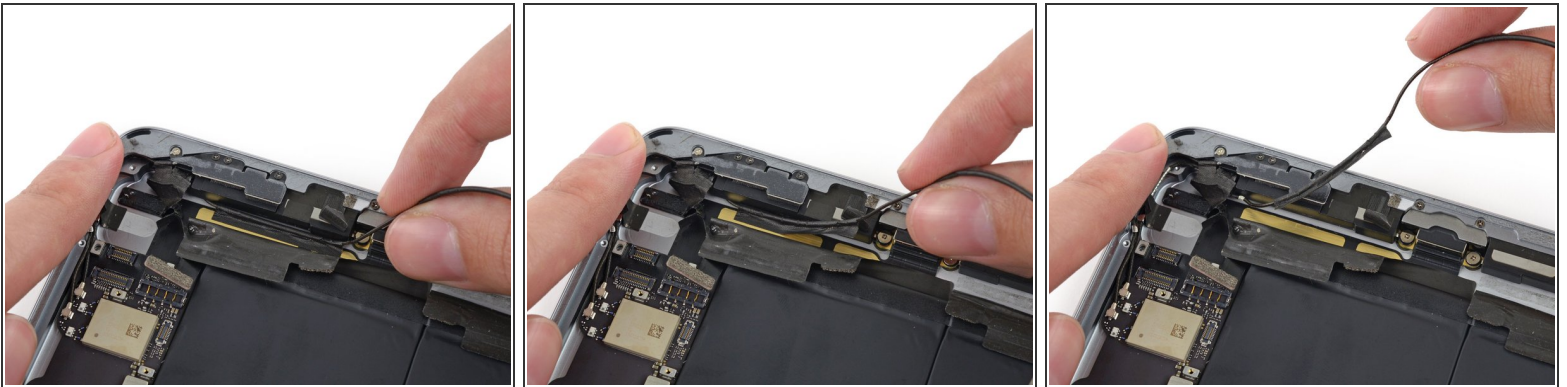

- Lift the antenna cable tape up from behind the right speaker.

### Step 3

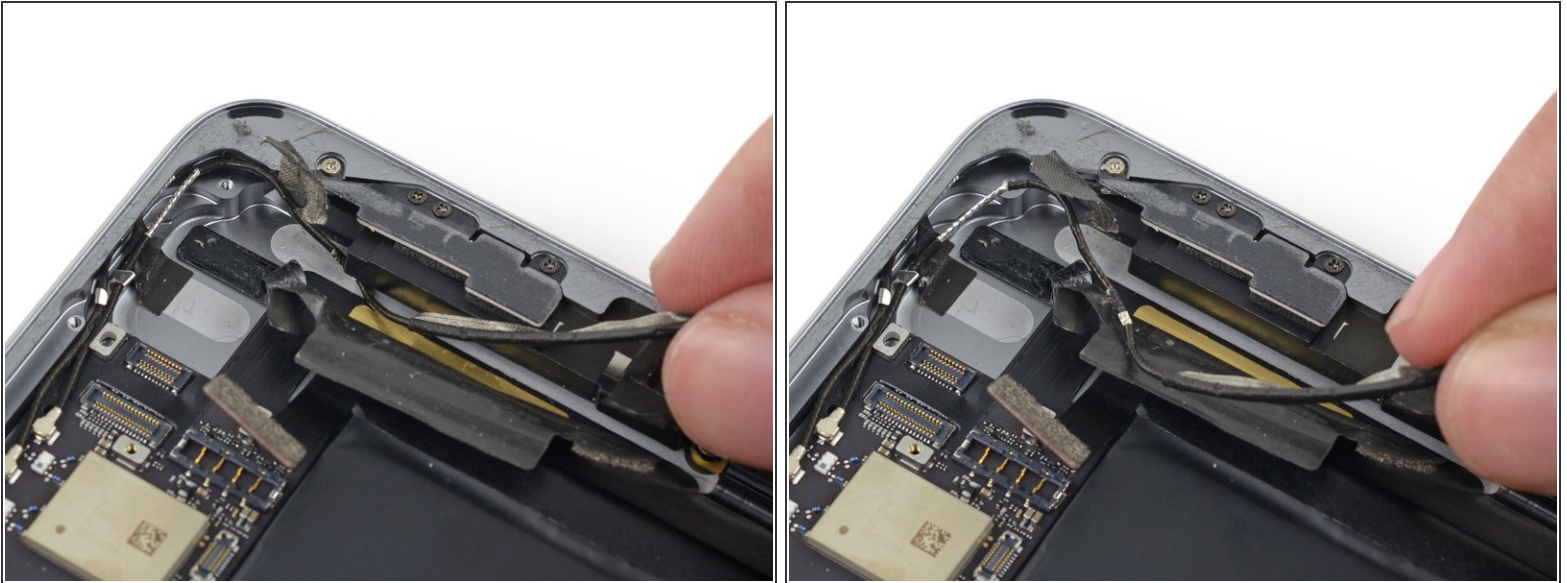

- Pull the antenna cable out from under the corner of the right speaker.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-17 07:42:30 AM.