




iRobot Roomba 655 Pet Series Front Bumper Replacement

How to remove the front bumper on your Roomba.

Written By: Rhett

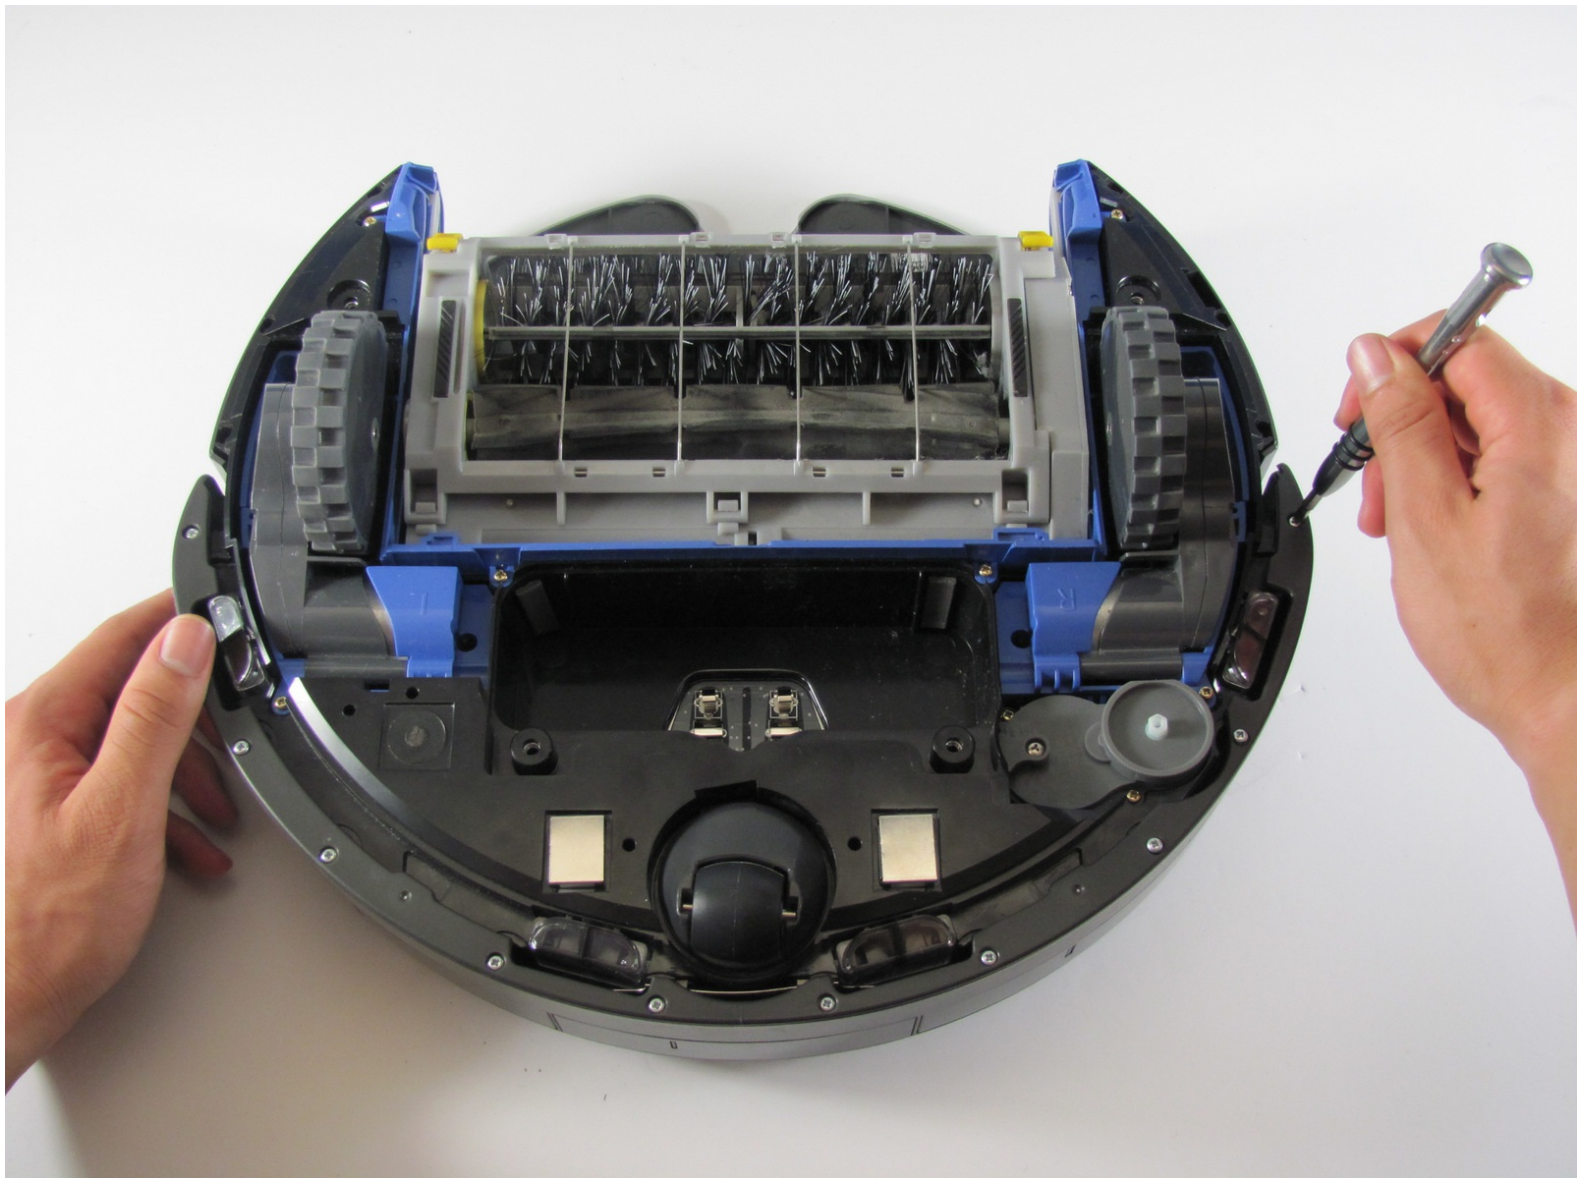



INTRODUCTION

You will be removing the front bumper (this runs into objects and walls) from the Roomba to gain access to the control center (display) and motherboard.

TOOLS:

- [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Front Bumper

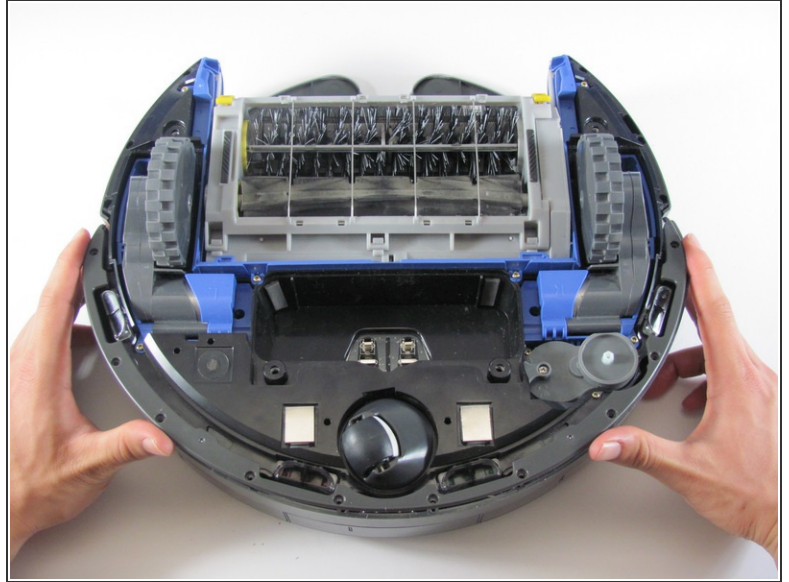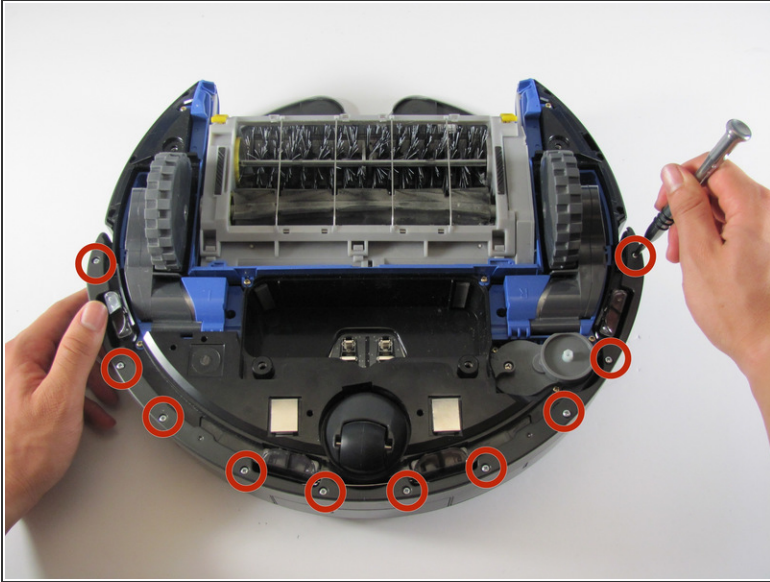

- Remove the ten 11mm screws that hold the front bumper to the plastic bumper protector with your Phillips #1 screwdriver.
- Pull the plastic bumper protector up and off of the bumper.

Step 2



- Flip the Roomba back over, so you are viewing the top.
- Pull up on the front bumper to remove it.
 ⚠ Be careful not to pull too hard because there is wiring attached to the bumper.
- Remove the two 7mm screws with your Phillips #1 screwdriver, holding the wire sensors in place to the front bumper.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2018-02-10 05:08:10 AM.