



# LG 1010 Front Cover Replacement

How to replace the front and back case in the LG 1010 cellular phone.

Written By: Nicholas Schmidt



 **TOOLS:**

- Flathead 3/32" or 2.5 mm Screwdriver (1)
  - Spudger (1)
  - T6 Torx Screwdriver (1)
-

## Step 1 — Front Cover



- Use a Spudger to remove the two front plastic covers to reveal screws.


## Step 2



- Remove two screws using a Torx T6 screwdriver.



### Step 3

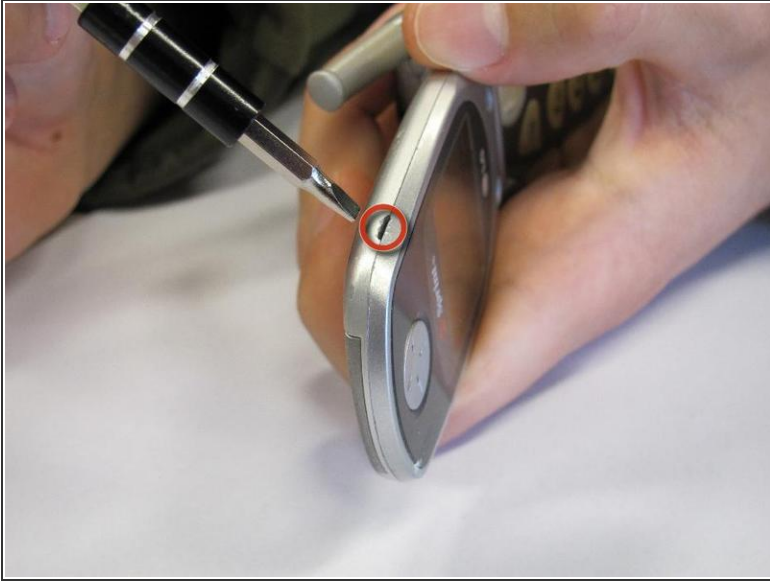


- Pry off the screen front cover with a small flathead screwdriver.

### Step 4



- Insert a small flathead screwdriver into the hinge and separate hinge connection.

## Step 5

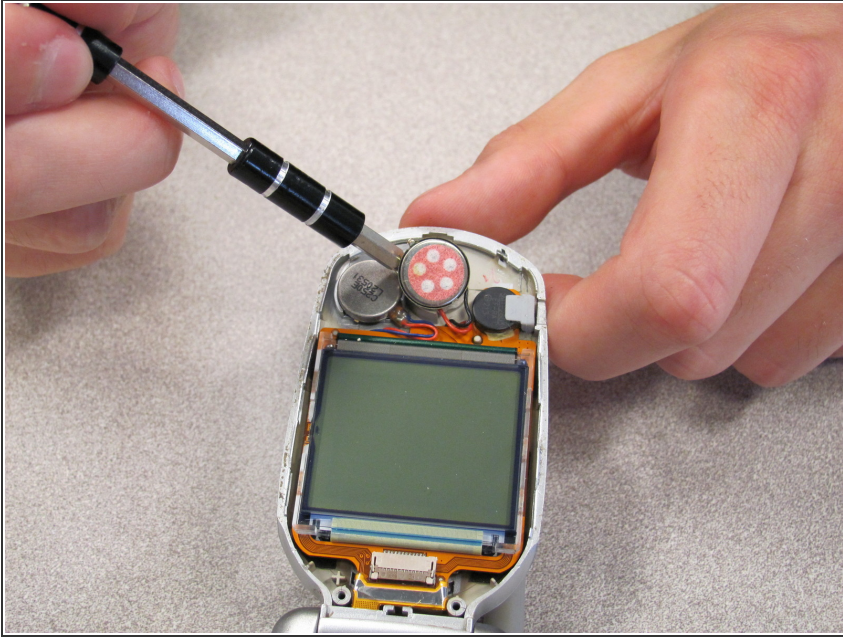

- Pry off the speaker which is glued on to the front cover using a small flathead screwdriver.

## Step 6



- Remove remaining portion of the front case from the flexible circuit board.
- ⚠ Do not attempt to remove the LCD board at this time, as it is attached to the rear panel assembly.

To reassemble your device, follow these instructions in reverse order.