




Texas Instruments TI-80 Back Casing Replacement

This guide shows how to remove the back casing to access other essential parts.

Written By: Calvin

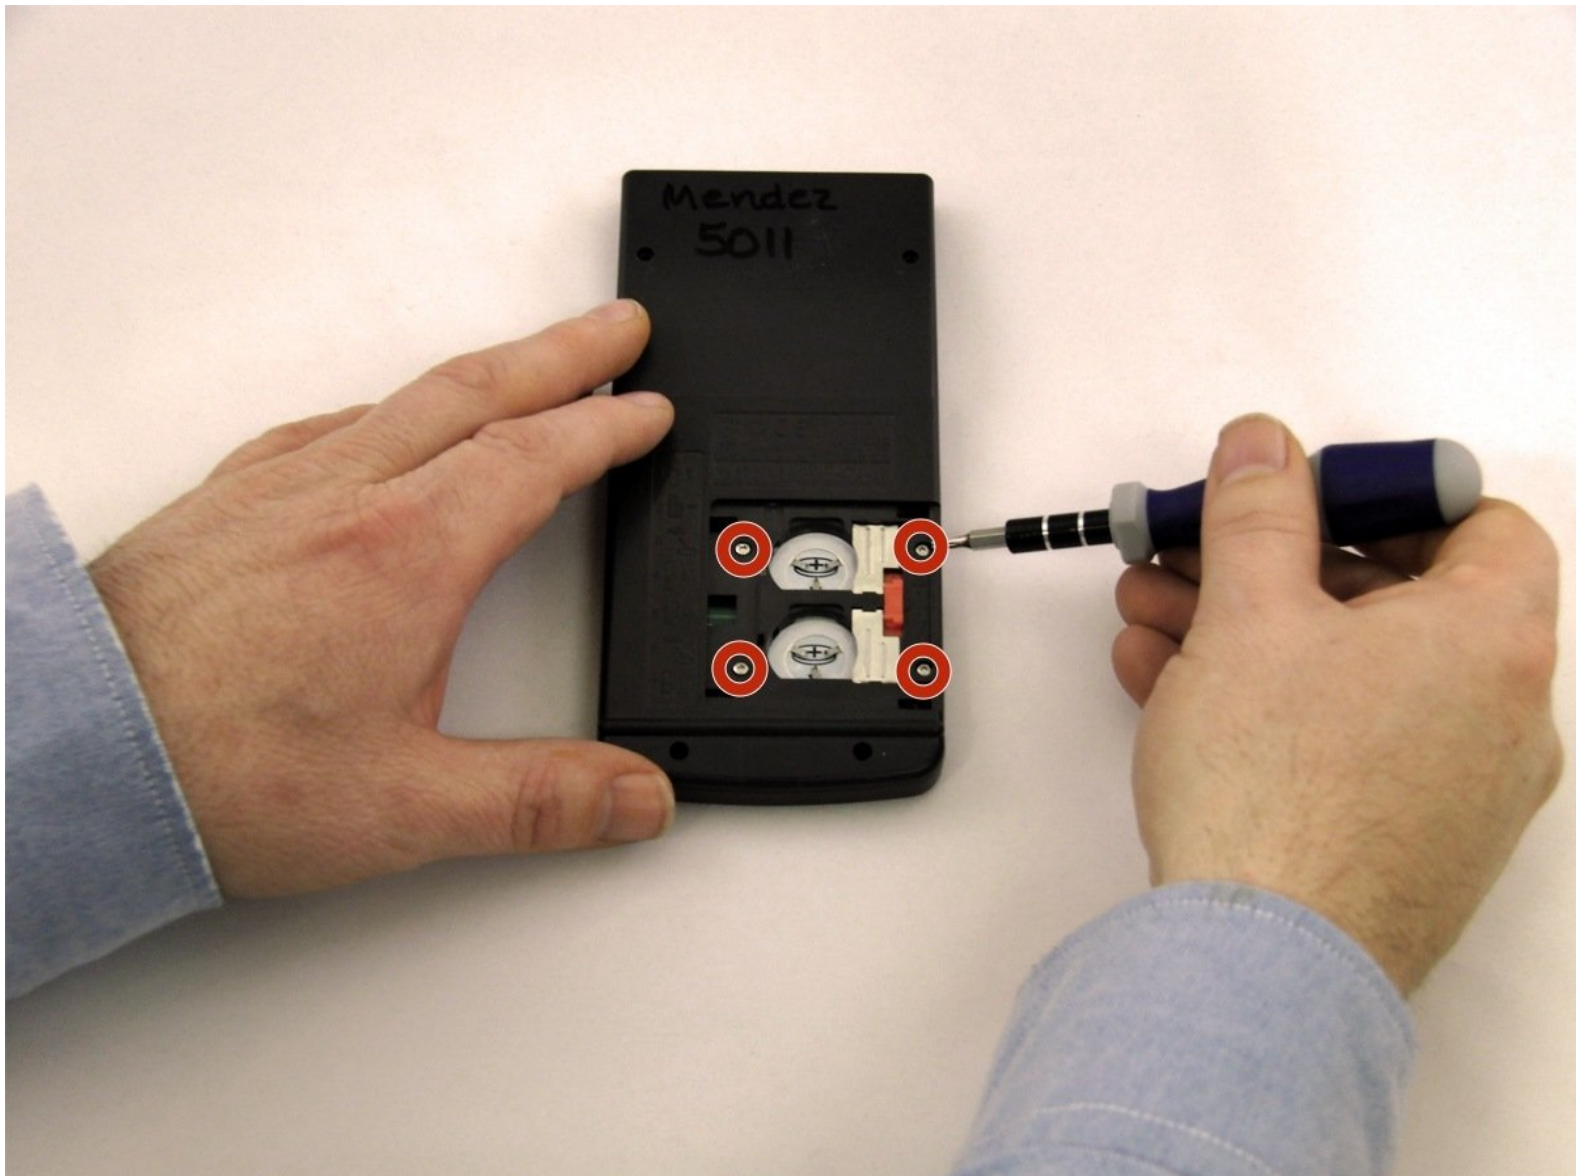

INTRODUCTION

This guide demonstrates and describes proper removal and replacement of the back casing. It is needed to access other parts for repair or replacement.

TOOLS:

- [T6 Torx Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Batteries




- Locate battery cover on the back of the case.
- Slide battery cover to the right reveal the batteries.

Step 2



- Remove battery cover.
- Slide the red lock down.
 - Slide the metal tab to the right of the top battery.
- Remove the 3-Volt Lithium Coin Cell Battery.
- Slide the red lock up.
 - Slide the metal tab to the right of the bottom battery.
- Remove the 3-Volt Lithium Coin Cell Battery.

Step 3 — Back Case

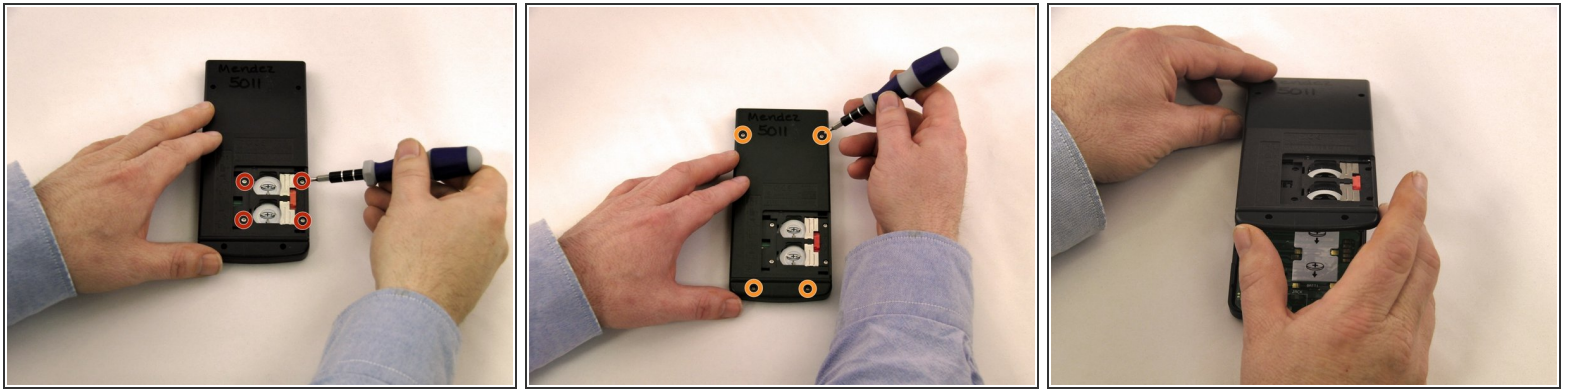

- Using a Torx, T-6 star-bit screwdriver, unscrew four 7.38 mm screws from battery housing.
- Unscrew four 7.15 mm screws from back casing.
- Using the blue plastic opener tool along the seam of the case, pry off front casing.
- ⓘ Start prying from the bottom of the calculator as the casing hooks into the top.

To reassemble your device, follow these instructions in reverse order.