



Sony Pulse Elite Edition Headband Replacement

Use this guide to replace a broken or cracked headband.

Written By: Chris Echter



INTRODUCTION

Outline what you are going to teach someone how to do.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)



PARTS:

- [Sony Pulse Elite Replacement Headband](#) (1)

Step 1 — Remove Headband Screws




- Remove the two 5mm Phillips #00 screws from each side of the headband connected to the metal track.

Step 2 — Remove Plastic Screw Bracket



- After removing the screws, push the small plastic protector on one of the sides towards the speaker closest to it.
 - After the protector has slid out of its slot, pull it away from the bar until it pops off the track.
- Repeat this process for small plastic protector on the other side.

Step 3 — Rail Cushion Removal

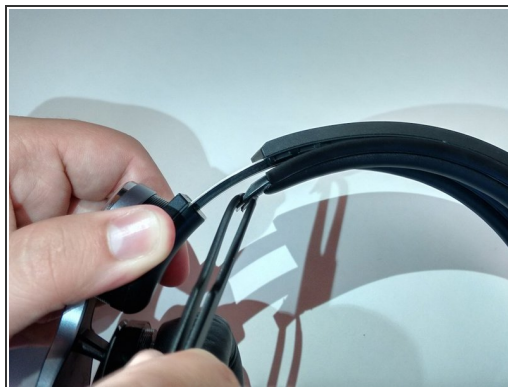

- Using your thumb, slide the cushion on one of the two adjusting rails toward the closest speaker.
- Once enough of the cushion has separated from the rail, pull the rest of it off.
- Repeat the process for the other rail.

Step 4 — Slide Headband Off Rails



- Gently pull the headband away from one of the speaker component groups, as if expanding it. Continue pulling until it is completely off the track.
- Remove the white and red wires from inside the headband.
- ⚠ Be sure to keep the two speakers close together since they are still linked via the speaker wires.
- Repeat this process for the other side.

To reassemble your device, follow these instructions in reverse order.