



Vivitar Vivicam T027 Screen Replacement

Learn how to replace the screen of your Vivitar Vivicam T027.

Written By: Nicole Knoebel



INTRODUCTION

Replace your screen if it is cracked or otherwise damaged.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Screen




- Remove the 3 mm screws at the sides of the camera using a Phillips #00 screwdriver.

Step 2




- Remove sticker on top of camera as it covers a screw.
- ⓘ There should be 5 screws to remove in total on the sides of the camera.

Step 3

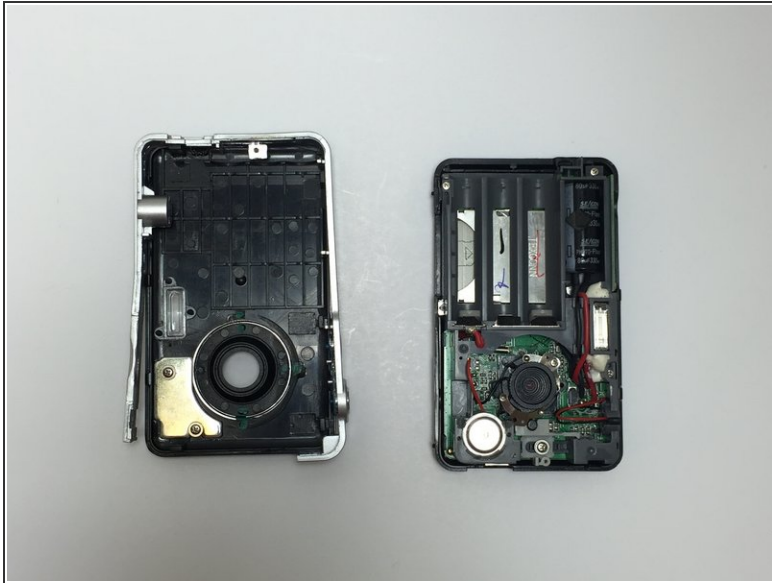


- Separate the front piece of the camera from the back, revealing the motherboard.

Step 4

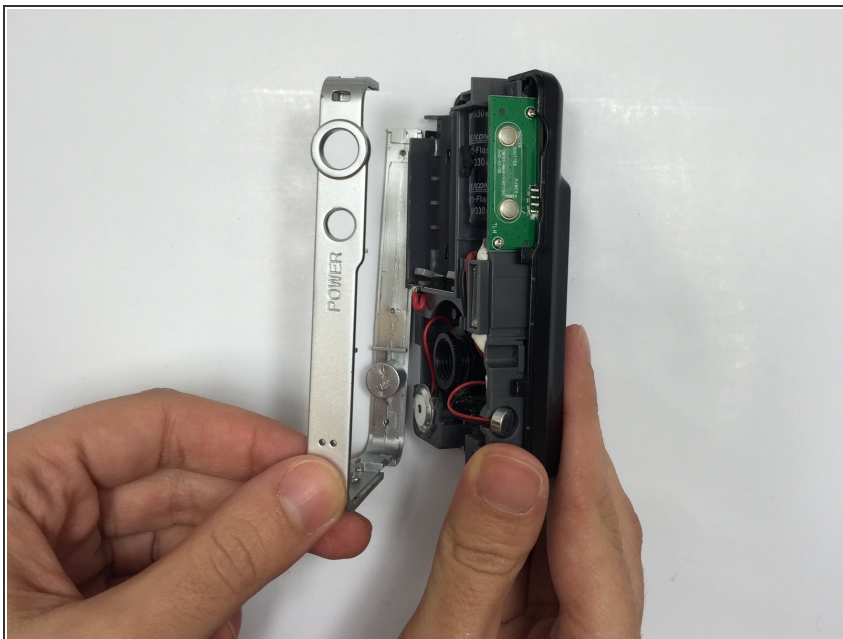


- Remove plastic silver strip from the front case of the camera.

Step 5

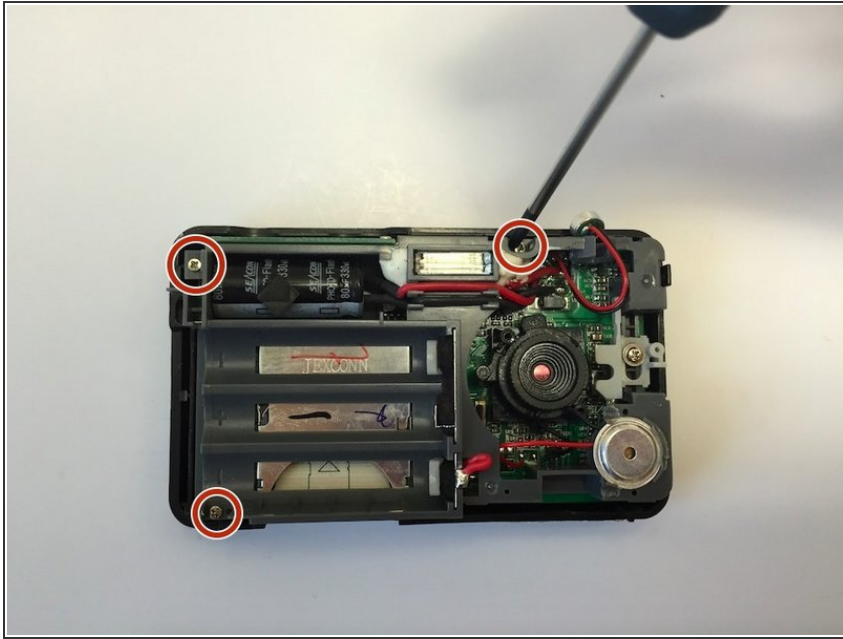



- Remove the three 2 mm screws holding in the gray plastic piece using a Phillips #00 screwdriver.

Step 6

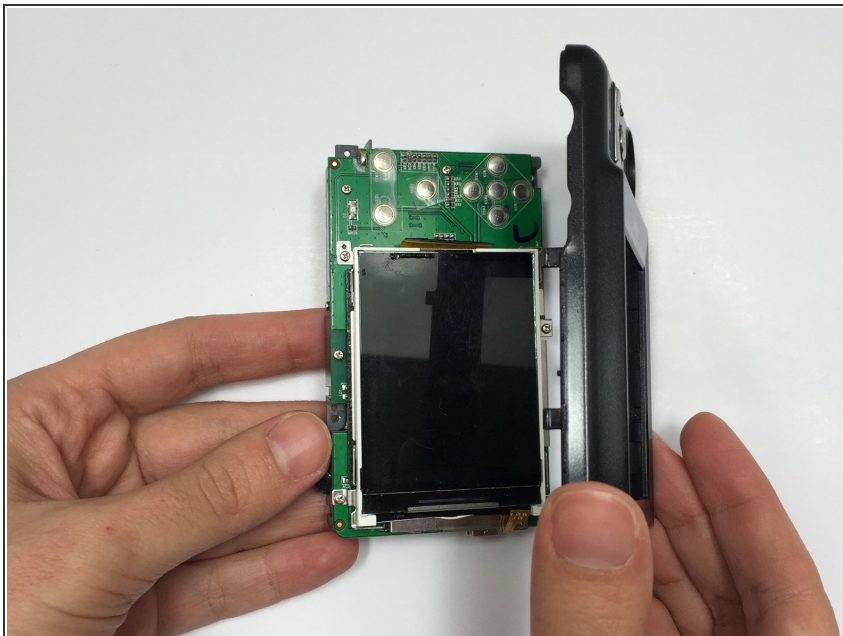

- Remove the black plastic cover to reveal the newly exposed screen.

Step 7

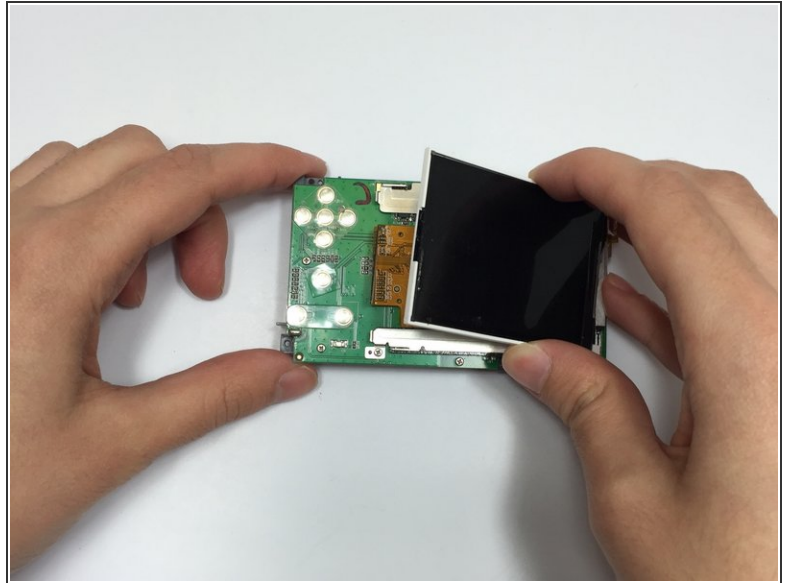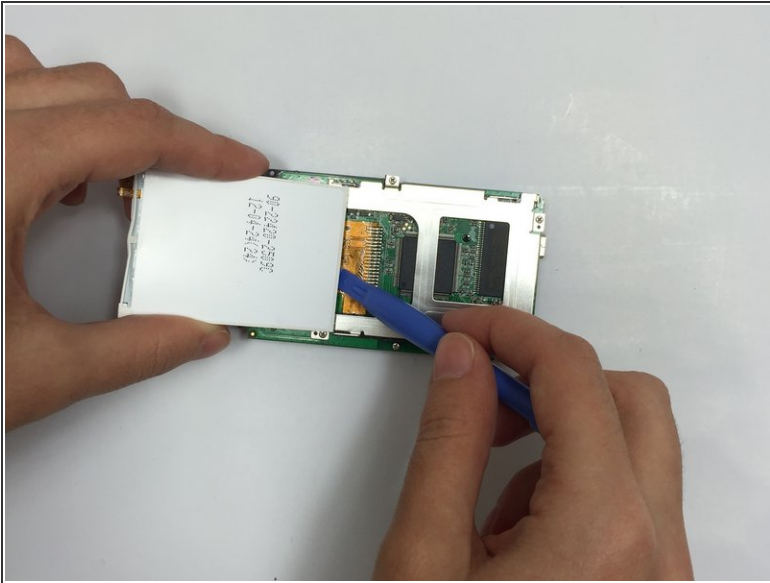

- Carefully remove gold film from the screen with a plastic opening tool.
- Gently pull the screen off the camera.

To reassemble your device, follow these instructions in reverse order.