




# Nokia 6310i Back Cover Replacement

Opening the phone casing.

Written By: Mustafa

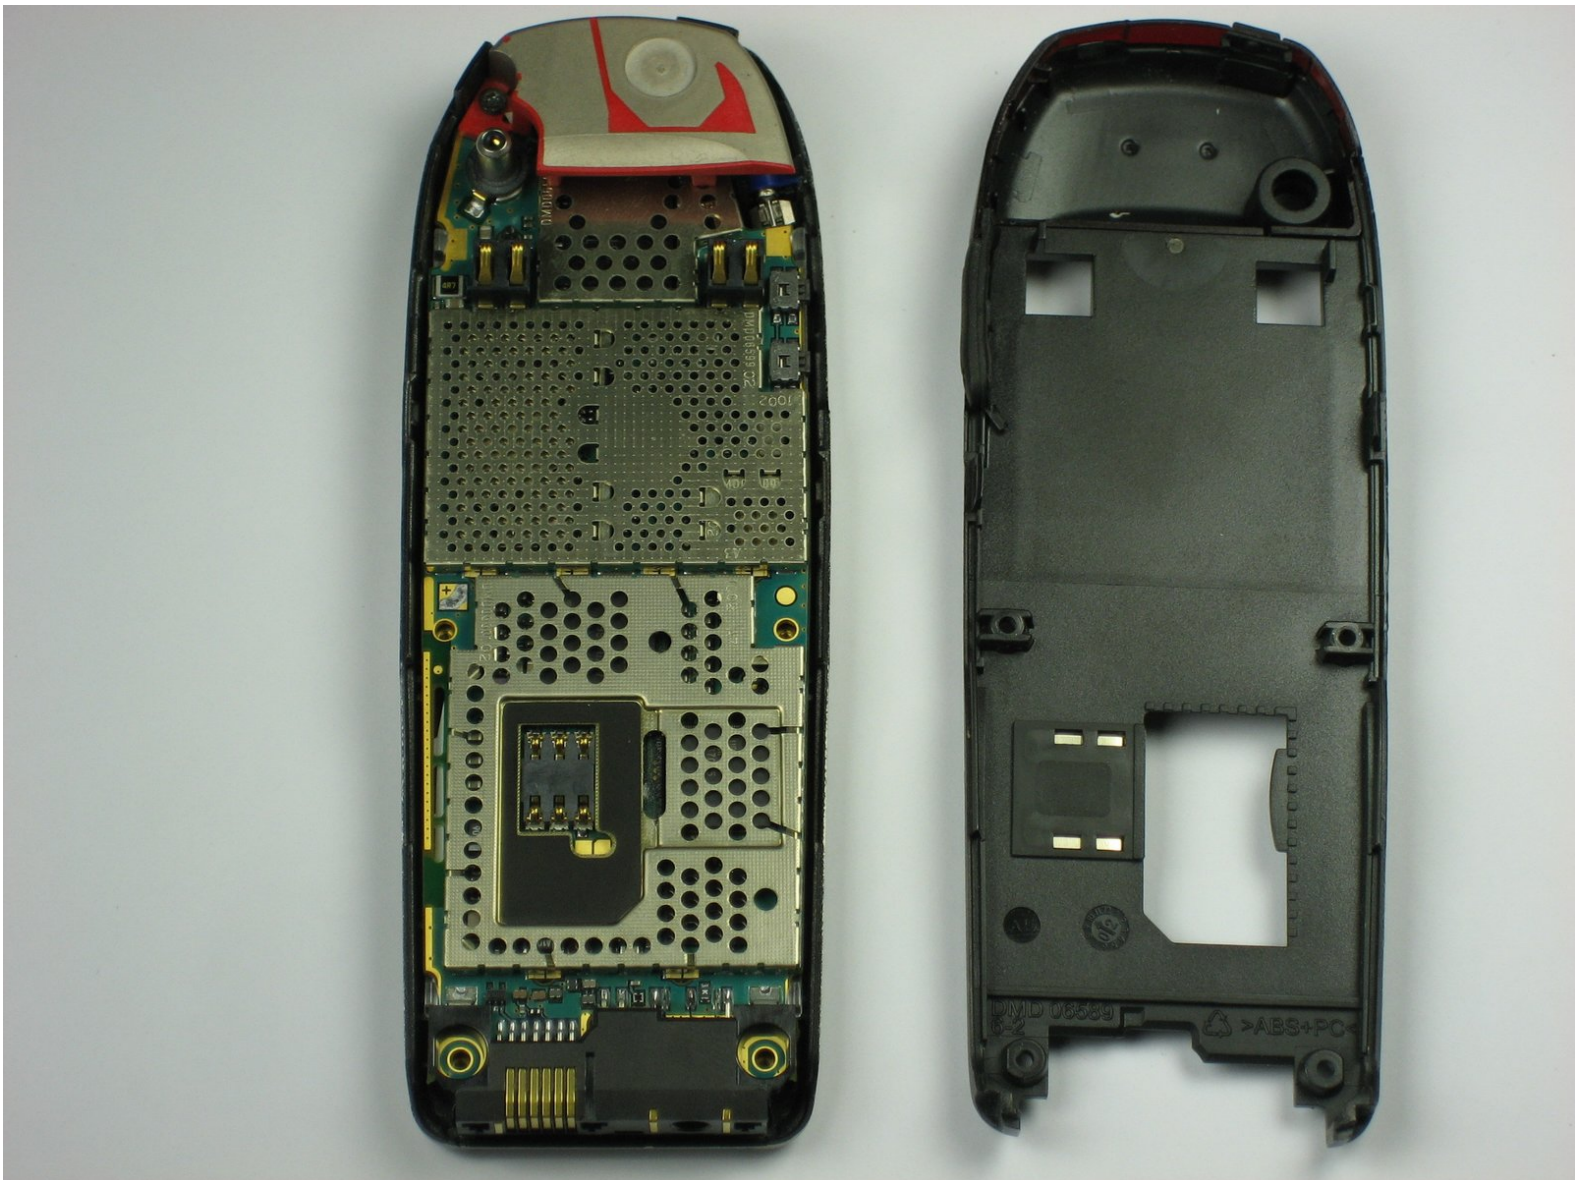

 **TOOLS:**

- [iFixit Opening Tools](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Battery




- Press and hold the battery release button and slide the battery away from the Nokia logo

## Step 2 — SIM card




- Slide the SIM card lock away from the SIM card.
- ⓘ The SIM card pops out. Remove the SIM card.

## Step 3 — Back Cover

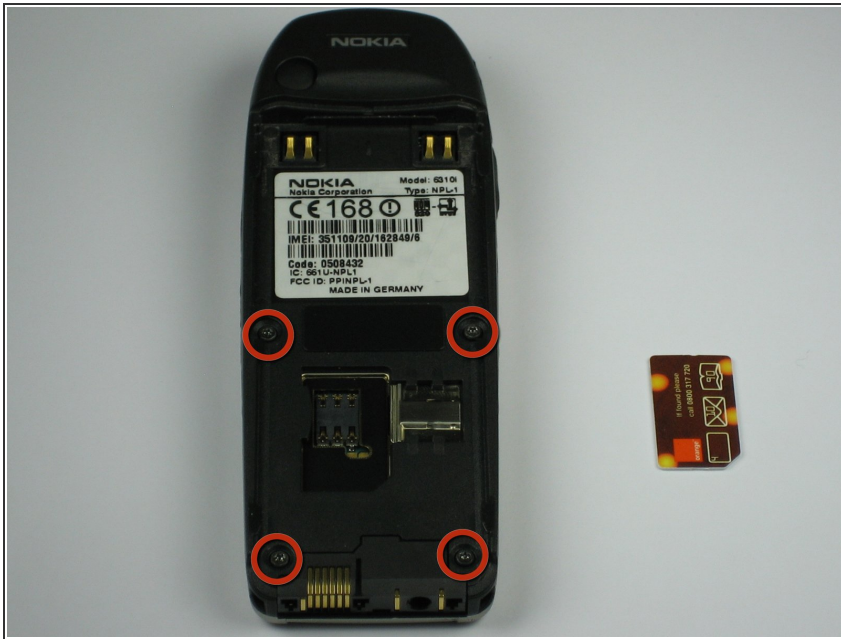

- Unscrew and remove the four T6 Torx screws.

## Step 4

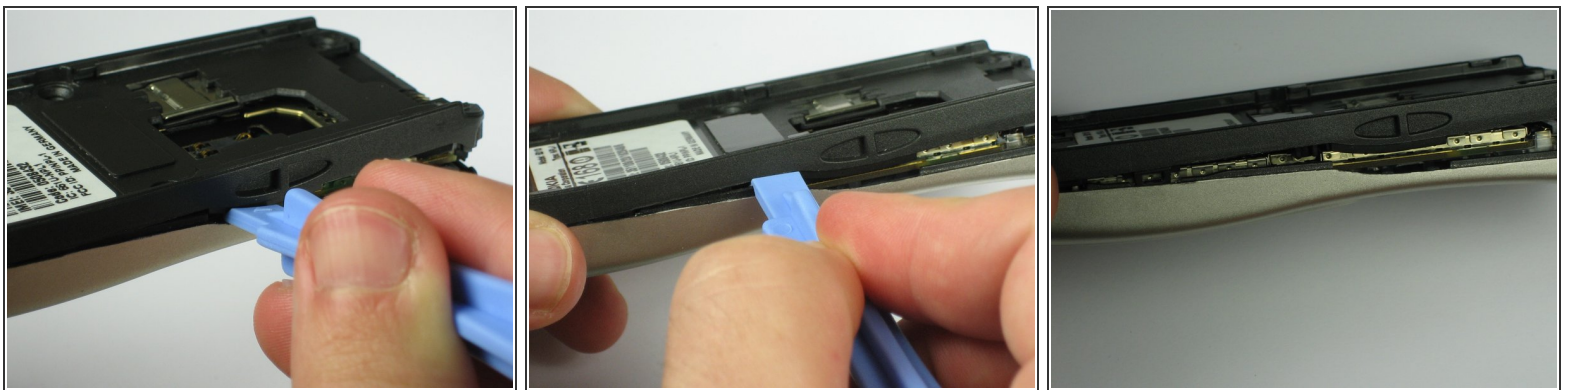

- Insert a plastic opening tool between the faceplate and the black backplate. Gently pry them apart, working from the lower end to the upper side of the phone.

## Step 5



- Use the plastic opening tool to separate the top part of the backplate.
- ⓘ The plastic clips at the top require slightly more force to separate.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-18 05:54:43 AM.