



Zeki Droid Tablet Back Casing Replacement

This guide will aid in the replacement of the back casing of the Zeki Droid tablet.

Written By: Wyatt Nelson



INTRODUCTION

This guide will begin with the disassembly of the Zeki Droid tablet. Throughout the replacement process be cautious in order to not break any pieces on the device. The replacement should only take about ten to fifteen minutes.

TOOLS:


- [Tweezers](#) (1)
 - [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Back Casing




- Remove the back casing by slowly popping each tab out with a plastic opening tool.

Step 2

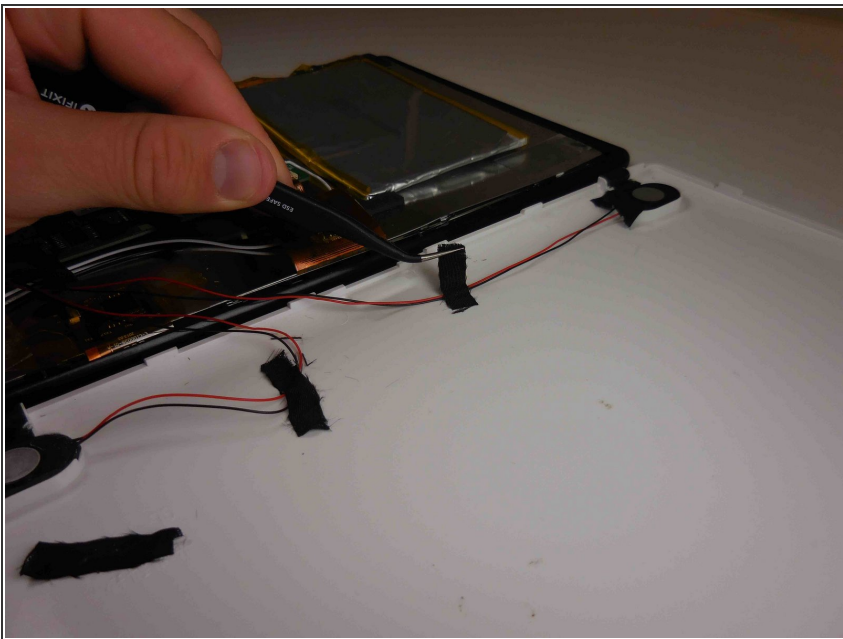


- Remove the tapes one by one from the connecting wires with tweezers.

Step 3

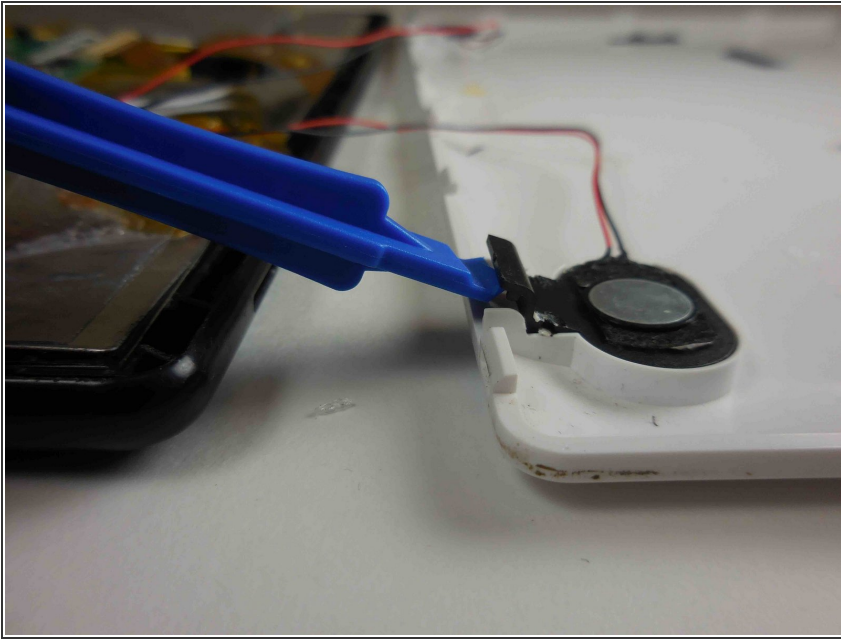


- Remove the black clips from both sides of the casing with a plastic opening tool.
- ⓘ The clips should pop off separate from the speakers.

Step 4

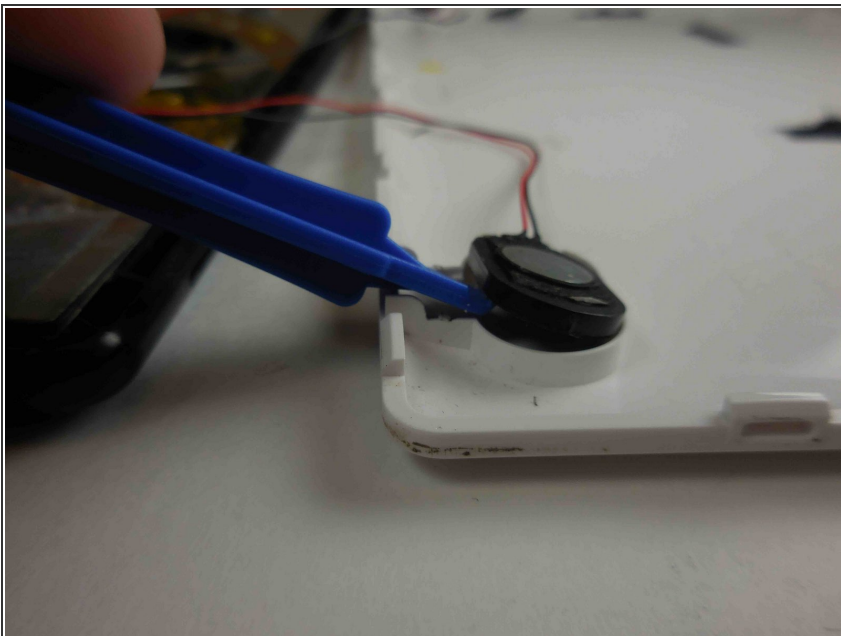

- Remove the speakers from the back casing.
- ⚠ Do not tug on the speakers because they are connected to fragile wires.

Step 5

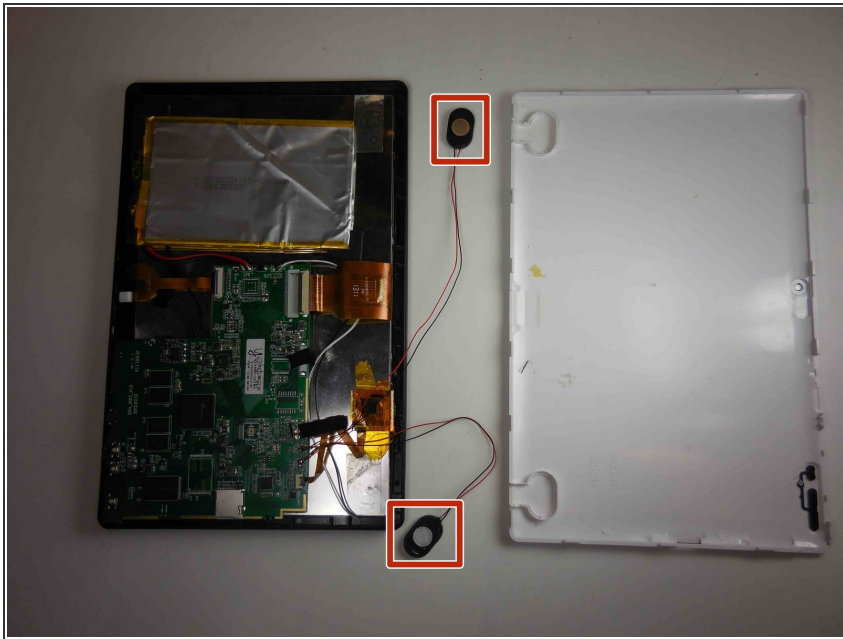

- Pull the speakers away from the back casing carefully.

To reassemble your device, follow these instructions in reverse order.