



# Replacing Antenna on Realistic Weatheradio

Replacing an antenna for a Realistic Weatheradio.

Written By: Matthew



---

## INTRODUCTION


If your Realistic Weatheradio is not producing any sound and your battery is still functioning, then the antenna is likely faulty and needs to be replaced. This guide will show users a quick and simple process on how to replace a faulty antenna.

---

### TOOLS:

- [Phillips #1 Screwdriver](#) (1)

## Step 1 — Antenna

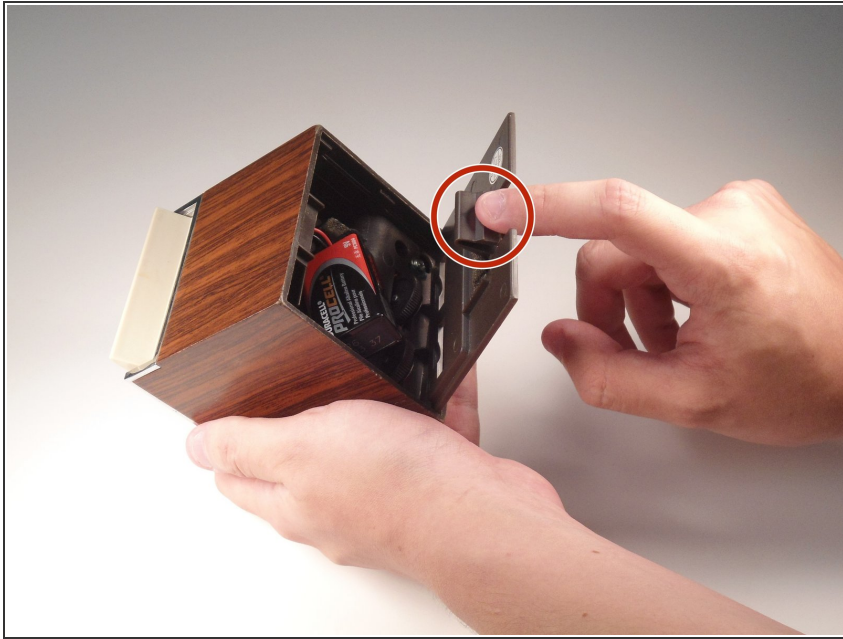


- To remove the back panel from the Weather radio, use your index finger and push down on the tab located on the back.

## Step 2



- Use a Phillips 1X80 screwdriver to loosen the screw located on the bottom right of the back panel.
- ⓘ Do not attempt to remove the screw because it will not come out.

### Step 3

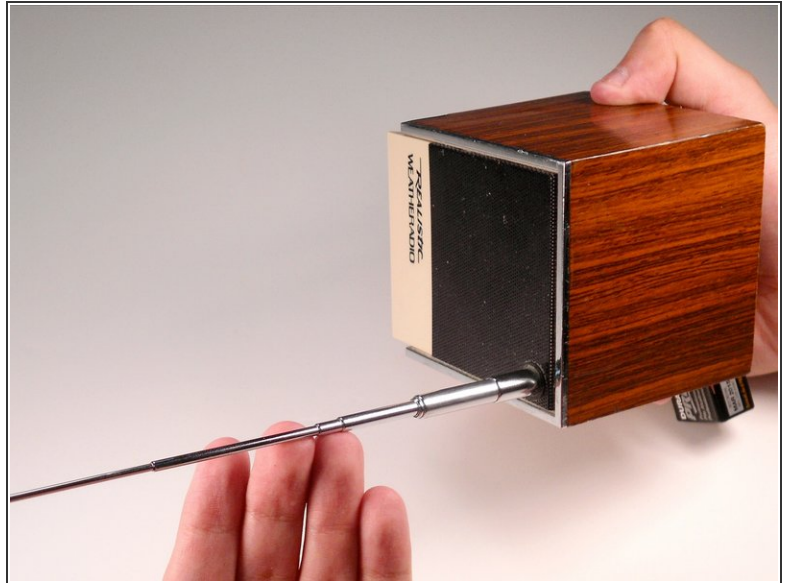

- Once the screw is loose, slowly pull out the antenna until it is completely out.
- Once the antenna is out, you can replace it with the new one.
- ☑ Do not force the antenna inside and make sure it is coiled all the way down.

After following these steps, the Realistic Weatherradio should be able to work and function normally.