




Nintendo DS Lite Lower LCD Assembly Replacement

Prerequisite guide of Nintendo DS Lite lower LCD assembly.

Written By: Matthew Newsom

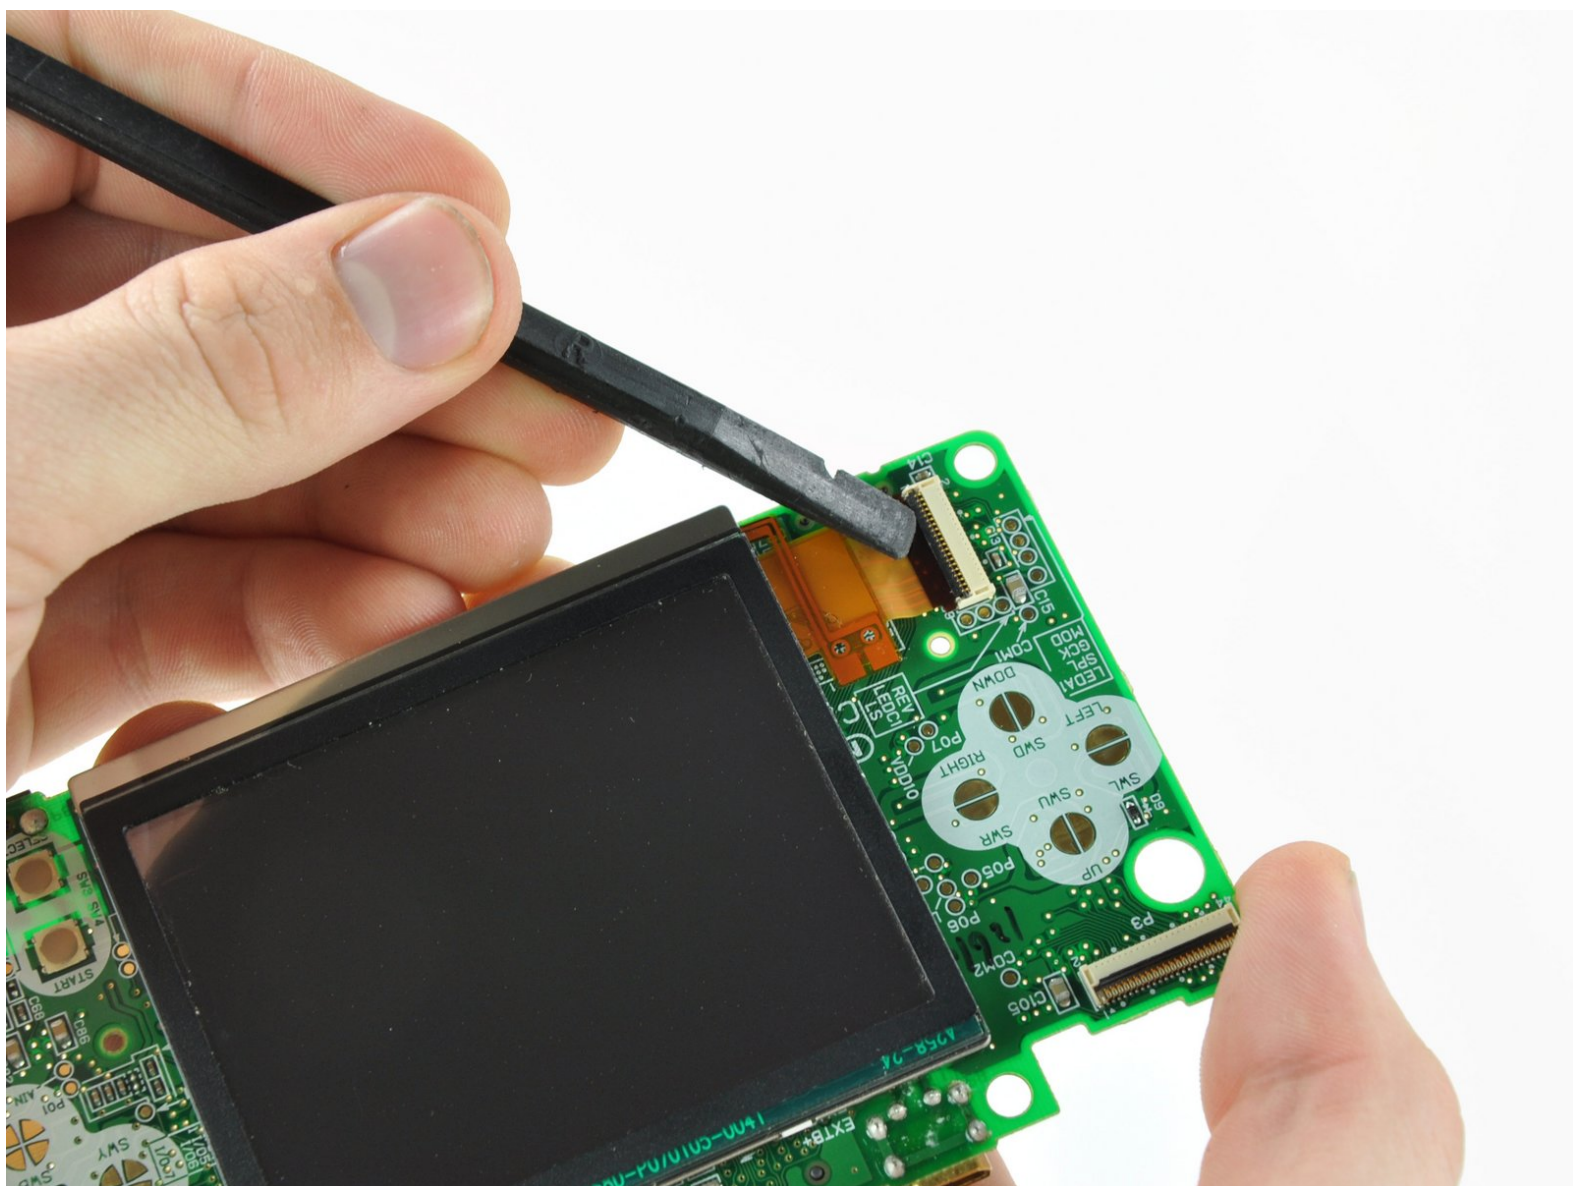



INTRODUCTION

Prerequisite guide of Nintendo DS Lite lower LCD assembly.

TOOLS:

- [Spudger](#) (1)
-

Step 1 — Lower LCD Assembly

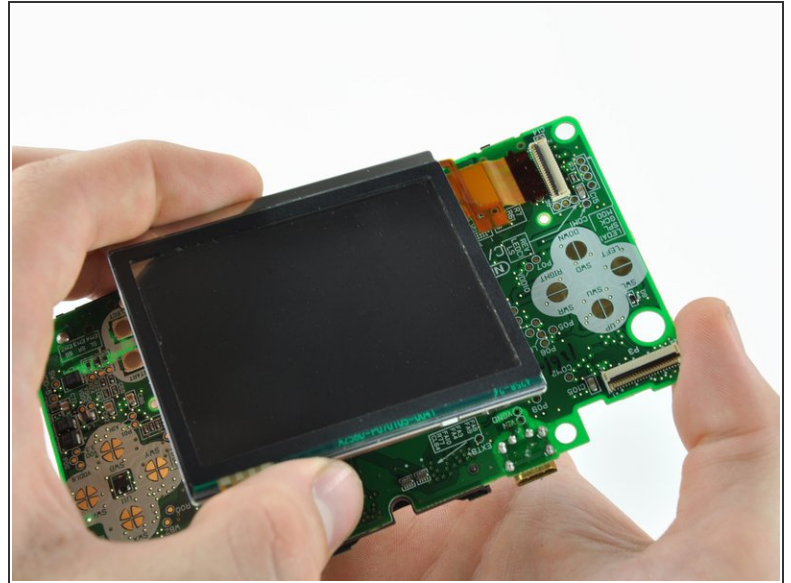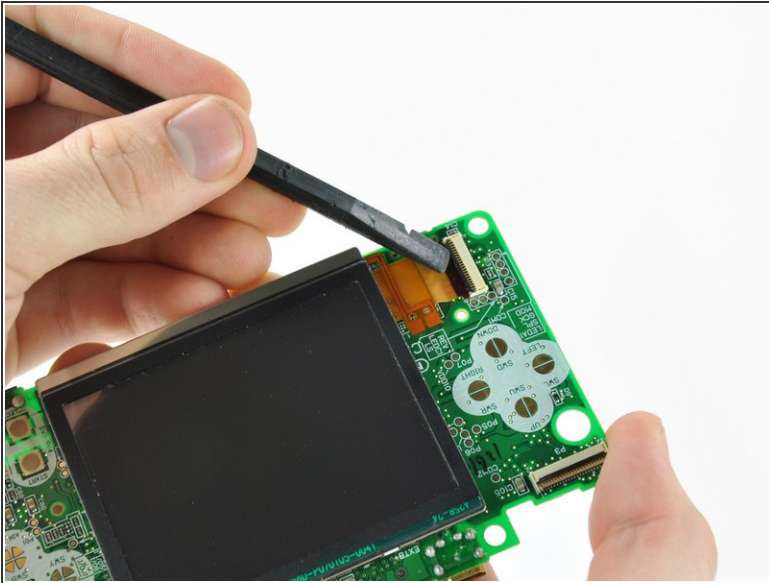

- Use your fingernail or the edge of a plastic opening tool to carefully flip up the lower LCD ribbon cable retaining flap.
- ⚠ Make sure you are flipping up the retaining flap, **not** the socket itself.
- Pull the lower LCD assembly straight away to separate the lower LCD ribbon cable from its socket on the motherboard.
- Remove the lower LCD assembly from the motherboard.
- ⚠ When reinstalling lower LCD, ensure it has insulation on the back to prevent a short circuit with the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-18 01:00:14 PM.