



Samsung SGH-X495 Backplate Replacement

How to remove the backplate of the Samsung XGH-X495.

Written By: Matthew Hove



 **TOOLS:**

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Use thumb nail to release the white hook; then use fingertip to pry the battery loose starting from the top.
- Second photo gives a view from the back of the phone and battery.

Step 2 — Backplate



- Remove the 4 (4.7mm) philips head screws.

Step 3





- Unplug the rubber charger outlet cover.

Step 4




- Unplug the rubber headset jack cover.

Step 5

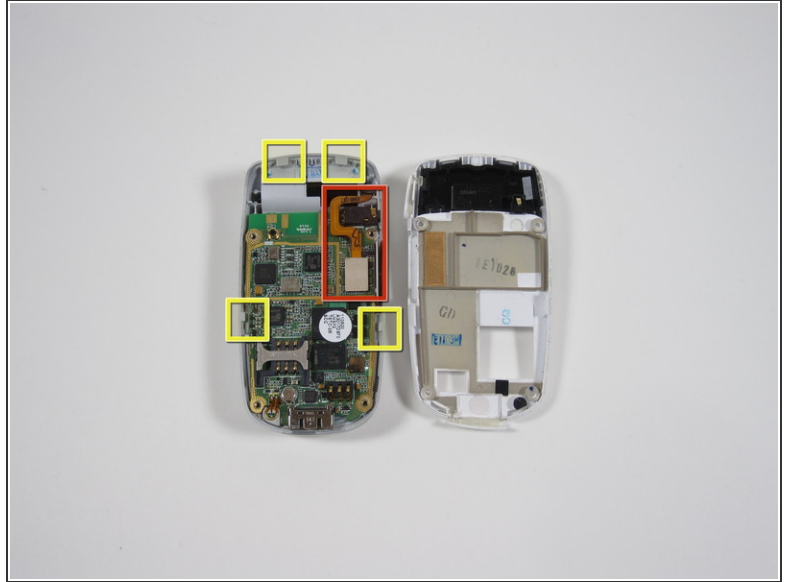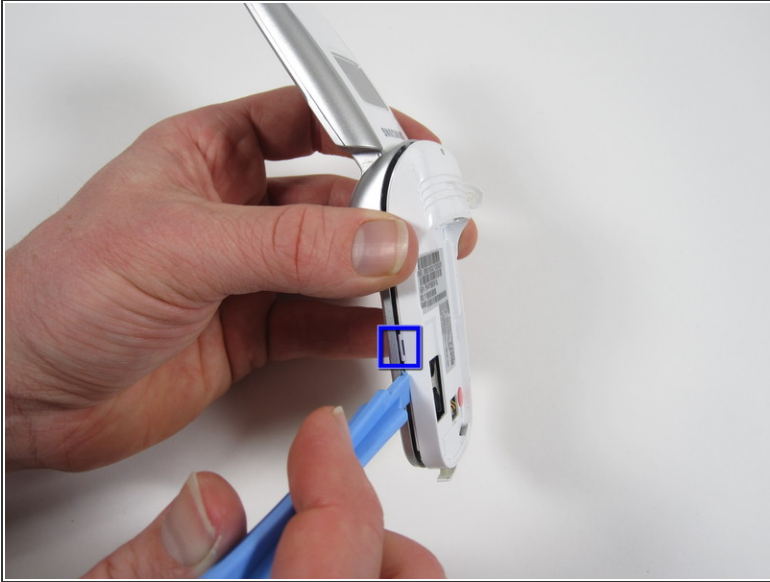

- Begin by inserting the pry tool near the charger jack.
- There are 4 tabs to release.
 - Start at the bottom and slide the tool up, lifting the silver front of the phone away from the white backing.
- Loosen the 2 side tabs before moving on to the top two.
- See the second photo to see location of the tabs.
- Be careful of the ribbon wires shown in second photo.

Step 6

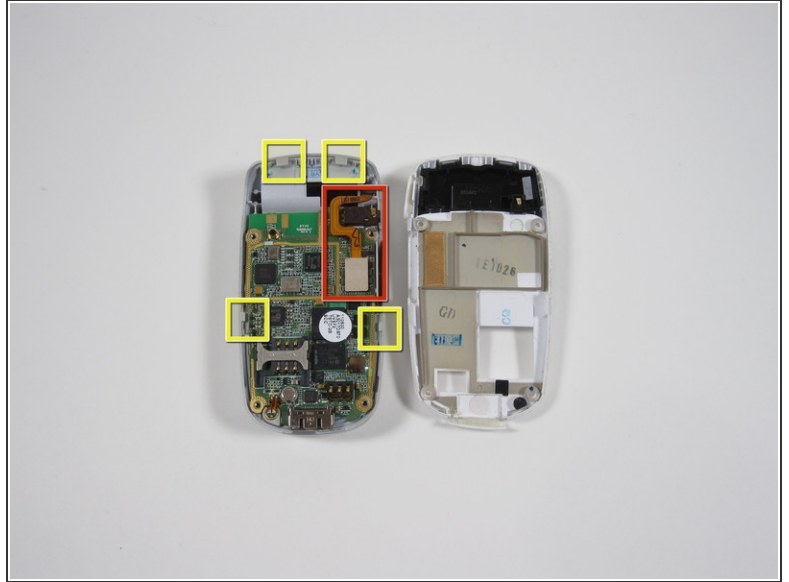

- Once the two side tabs are free; gently pry the white backing down to release the top two tabs.
- Hold the phone with the left hand as shown
- Wiggle the white backplate from side to side while pulling down with the right hand.
- Be careful of the ribbon wires shown in second photo.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2018-06-11 01:09:22 AM.