



Handspring Visor Edge Back Panel Replacement

This guide will show you how to remove the back cover.

Written By: Nick Lazarakis




INTRODUCTION

The only tool needed is a #00 Phillips Screw driver.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Back Panel

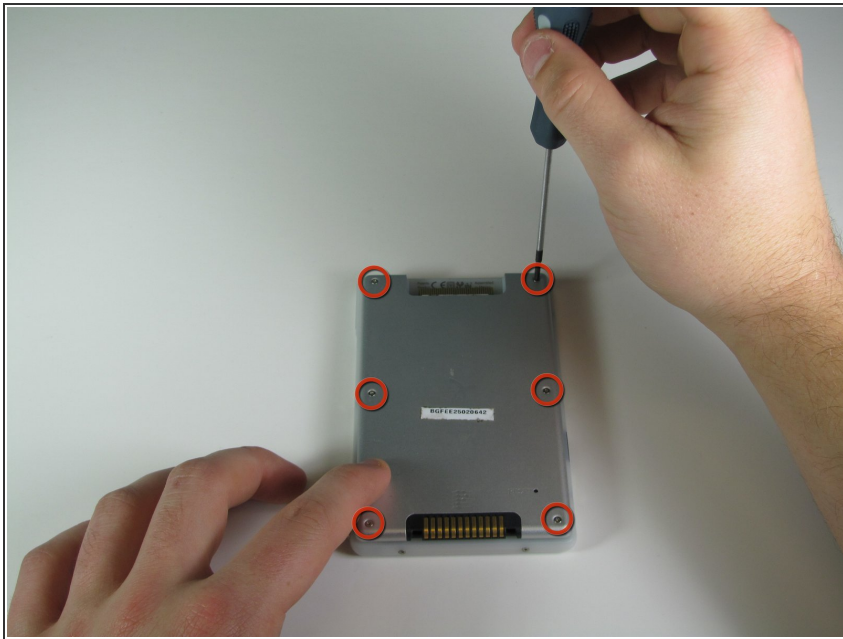

- Remove the six 4.1 mm Phillips screws from the back plate using the #00 Phillips Screwdriver.

Step 2




- Remove the black plate from the PDA.

Step 3




- Remove four 2.6 mm Philips screws that are on the sides of the frame.
- Remove the remaining 3.9 mm Philips screw holding together the stylus holster and the frame.

Step 4

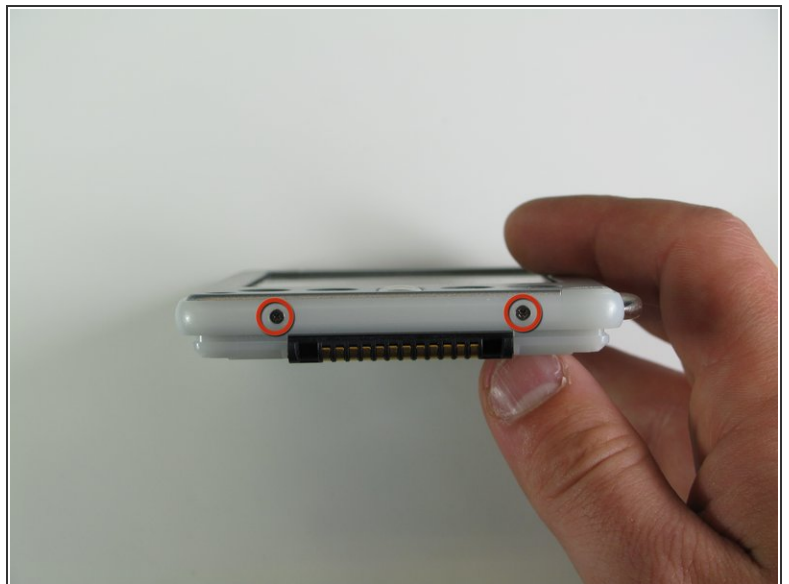


- Remove the four 2.6 mm Philips screws on the top and bottom of the frame.

Step 5

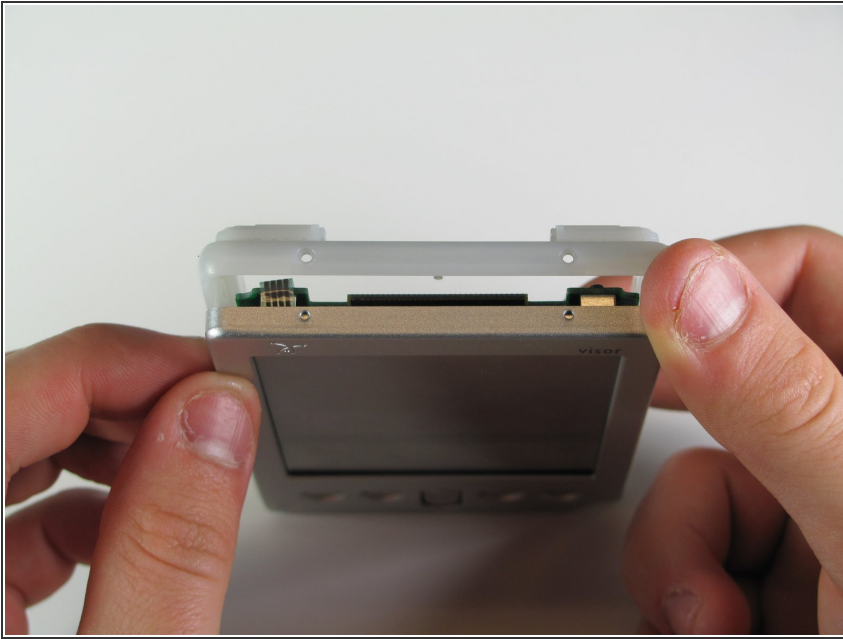

- Remove the white frame from the PDA.

 The frame may get stuck on the corners so be very gentle when working the corners off.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-18 01:12:40 PM.