



# Squier Strat Guitar Pickups Replacement

This guide will show you how to replace the Fender Squier pickups.

Written By: Ion



---

## INTRODUCTION



You need working pickups to achieve an awesome guitar tone! Use this guide to replace broken or faulty pickups!

---

### TOOLS:


- [Soldering Iron](#) (1)
  - [Solder](#) (1)
  - [Phillips #1 Screwdriver](#) (1)
  - [Wire stripper/crimping tool](#) (1)
  - [Guitar string winder and cutter \(Optional\)](#) (1)
  - [Desoldering Braid](#) (1)
-

## Step 1 — Pickups

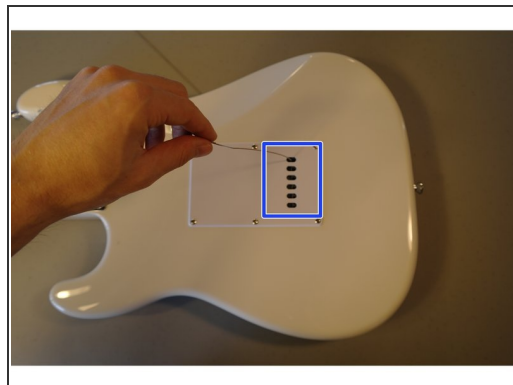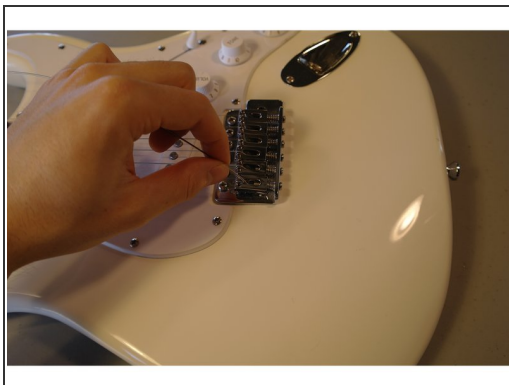



- Unwind your strings by turning the tuning pegs.
- Pull the strings out of your tuning peg holes.
- Push the strings out through the back plate holes.
- ⓘ Use a string winder to speed up this process.

## Step 2

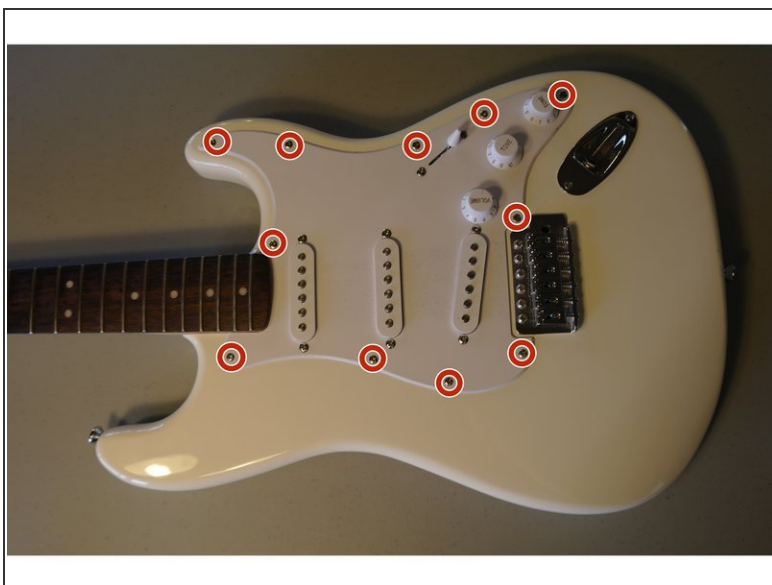


- Unscrew the 11 screws holding the pickguard to the body of the guitar.
- ☑ Keep the screws in a safe place!



### Step 3

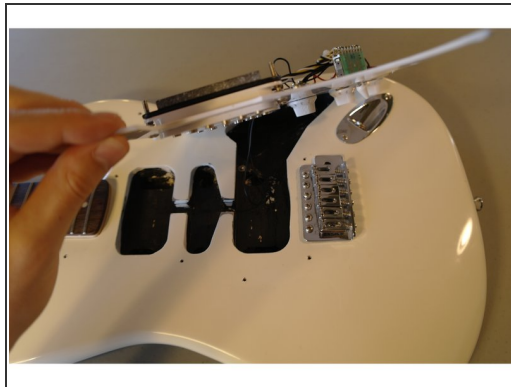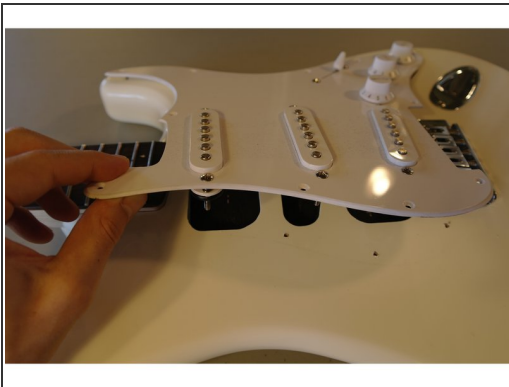


- Lift up the pickup guard gently.
- Flip the pickup guard to expose the wiring.
  - Place a towel underneath pickup guard to protect your guitar's body.

 Do not use excessive force when lifting the pickup guard.



### Step 4

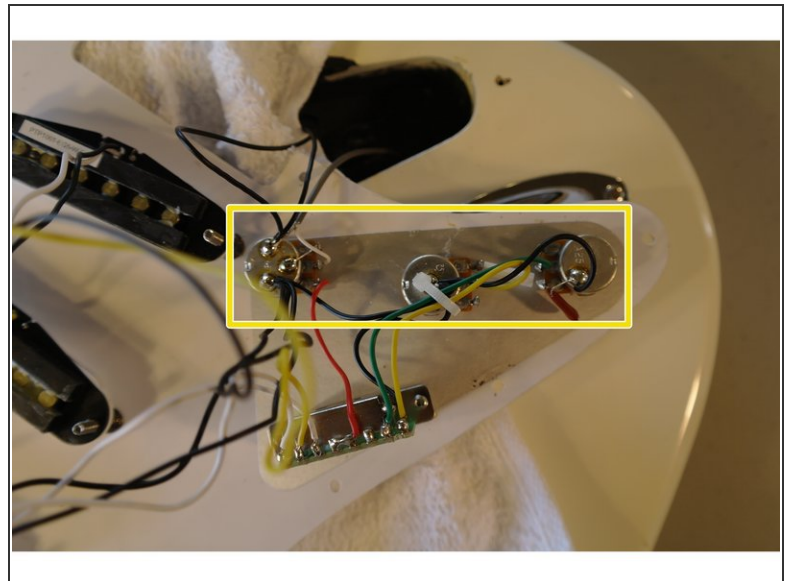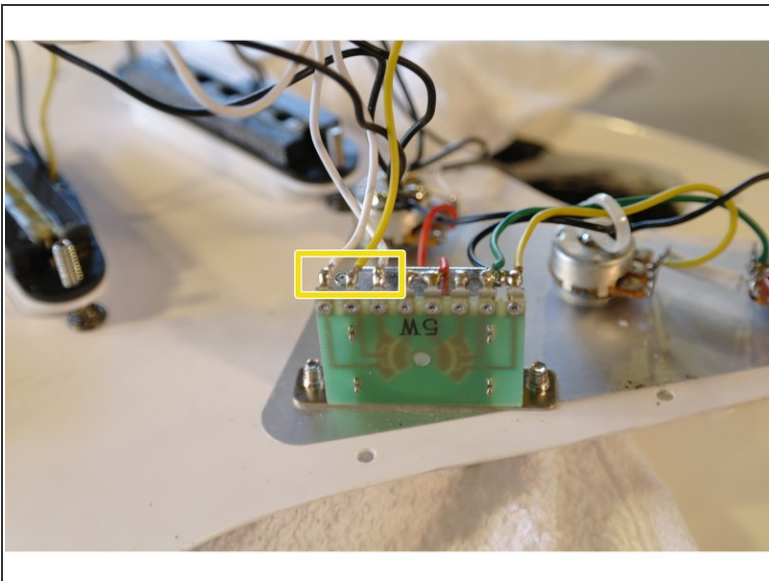

- Take note of where each pickup is wired.
  - Make sure to keep track of the negative and positive wires. Black wires usually indicate negative wires.



 Pickups are usually wired to the potentiometers and pickup selector switch.

## Step 5

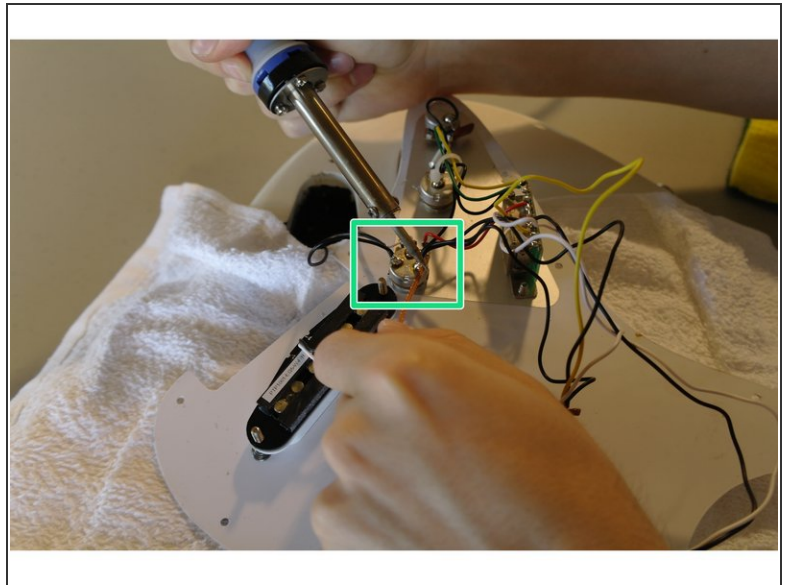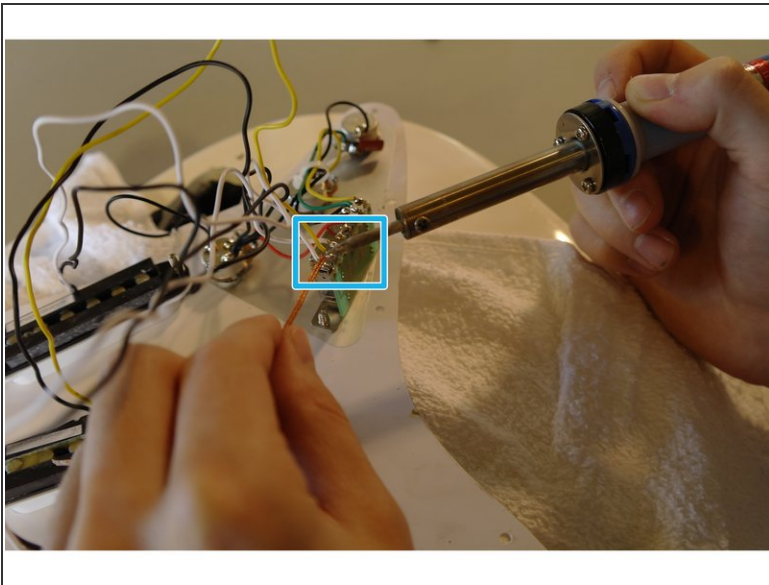



- Desolder the pickups from the pickup selector switch using a quality soldering iron and soldering wick.
- Desolder the pickups from the potentiometers.
- ⚠ Excessive heat from the soldering iron can damage components.

## Step 6

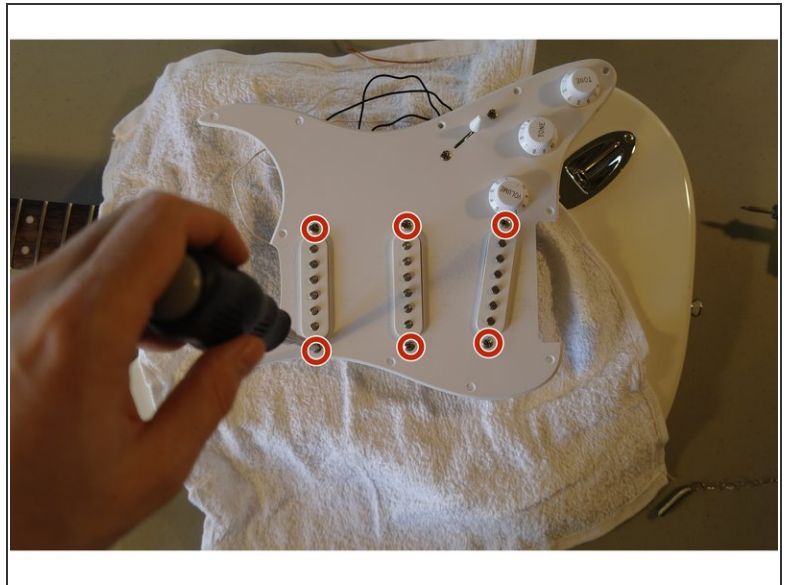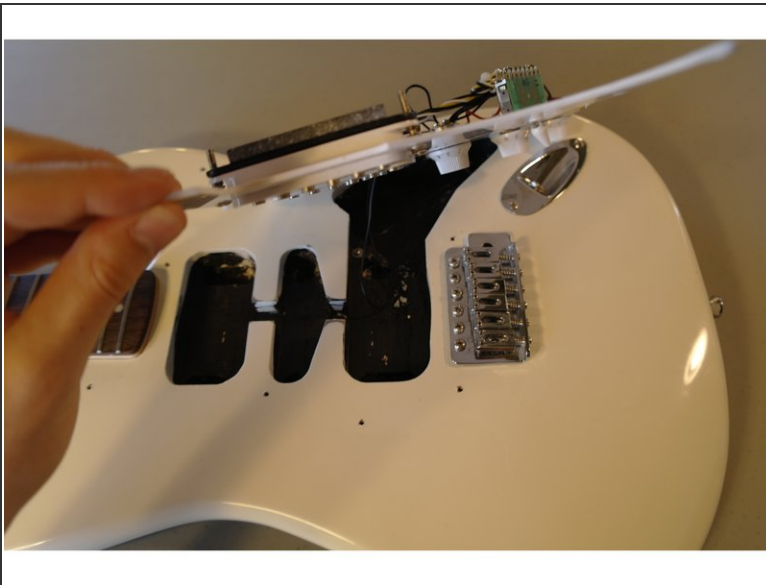

- Flip the pickup guard back to its original position.
- Remove the screws holding the pickups to the pickup guard.

## Step 7

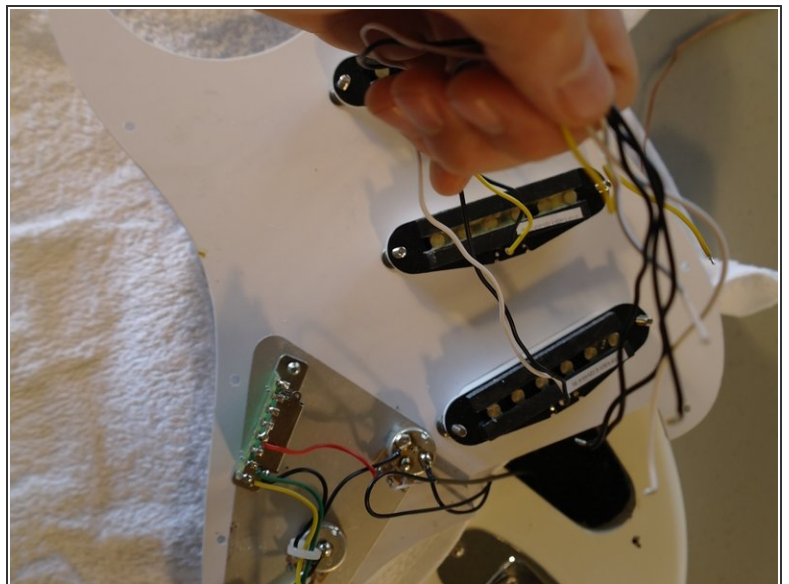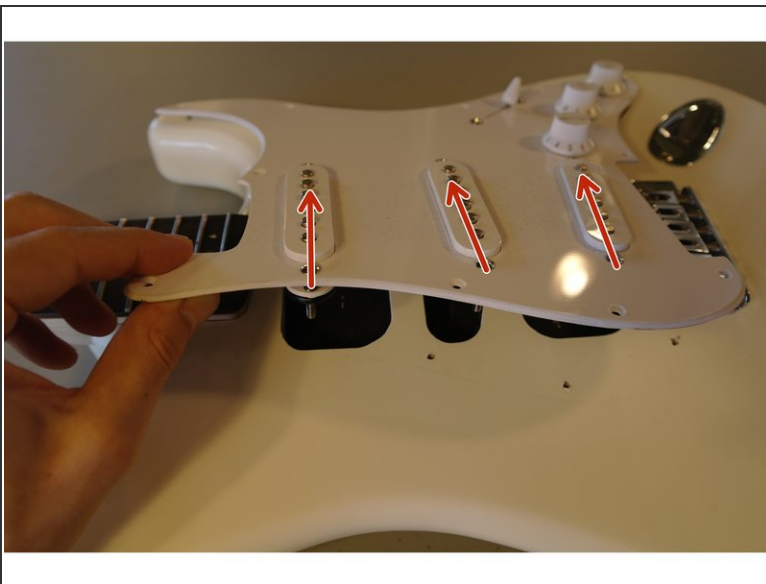

- Flip the pickup guard to reveal the wiring.
- Remove pickups from the pickup guard. They should come out very easily.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-08-22 03:11:32 PM.