



# Texas Instruments TI-30 XS Multiview Battery Replacement

This guide will teach you how to remove and...

Written By: Nancy Ruiz



# INTRODUCTION

This guide will teach you how to remove and replace the battery to the TI-30XS Multiview. Be sure to note the orientation of the battery for when a new one is being put in.

## TOOLS:


Spudger (1)

Phillips #00 Screwdriver (1)

## PARTS:

CR2032 Lithium Battery (1)


## Step 1 — Open the device

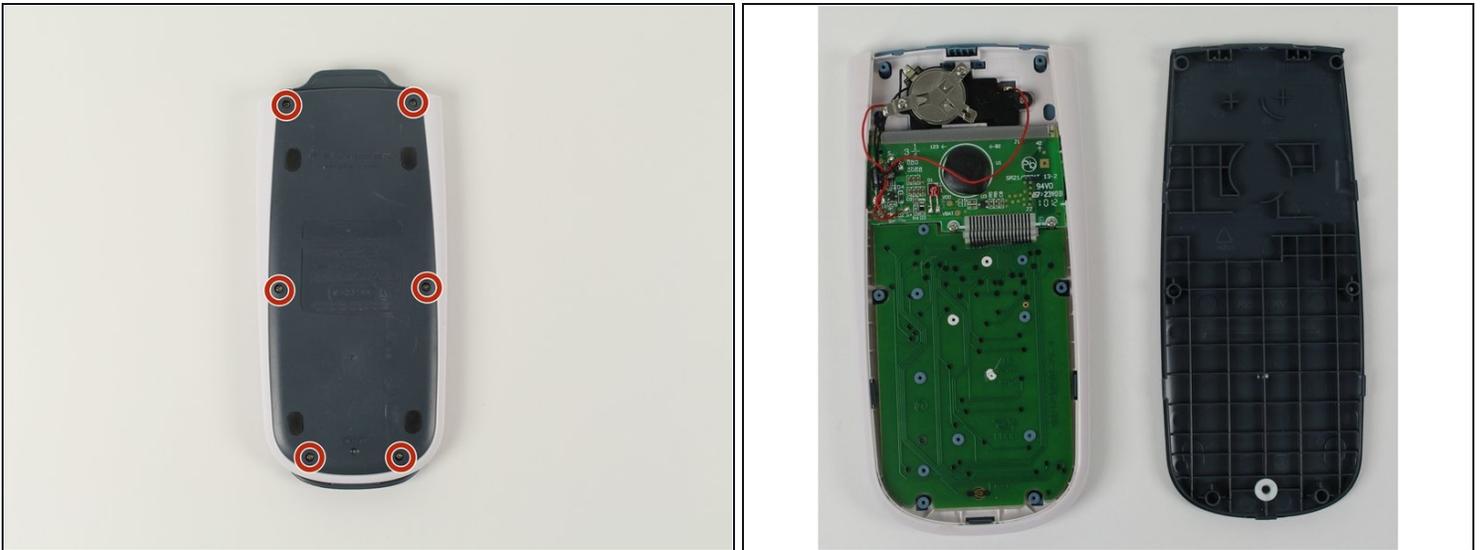

**⚠ If the screw is not turning, do not force it. This can strip the screw. See the [How to Remove a Stripped Screw](#) guide if the screw is already stripped.**


- Using the #00 screwdriver, unscrew the six, 6mm Phillips screws.
- Use the spudger (or fingernail) to pry into the space between the blue back cover and the white body to take off the back cover.

## Step 2 — Open the battery compartment

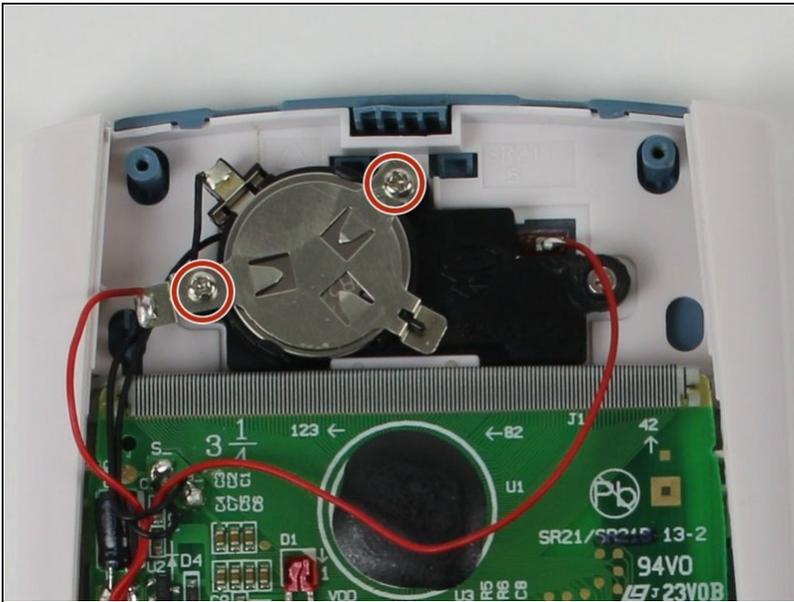


- Using the #00 Phillips screwdriver unscrew the two, 3mm Phillips screws located near the top of the calculator.
- Lift the metal plate from the battery and set it to the side.

## Step 3 — Eject the battery

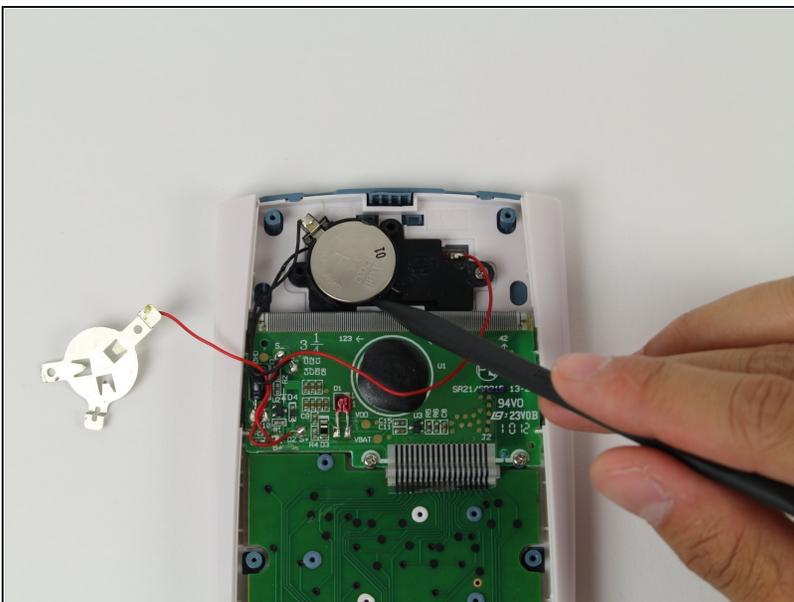

- Use the spudger (or fingernail) to lift the battery from the black holder.

## Step 4 — Finish up

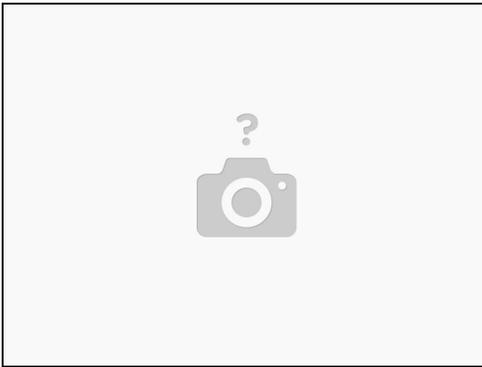

- Put the new CR2032 battery in. **Never** insert a different type of battery!

**⚠** Make sure the **positive** side of your CR2032 is facing up.

- Reverse the steps 2 and 1.

---

To reassemble your device, follow these instructions in reverse order.