




# Zeki TBQG884B Camera Replacement

Replace the camera on the Zeki TBQG884B tablet.

Written By: Natalie Holm

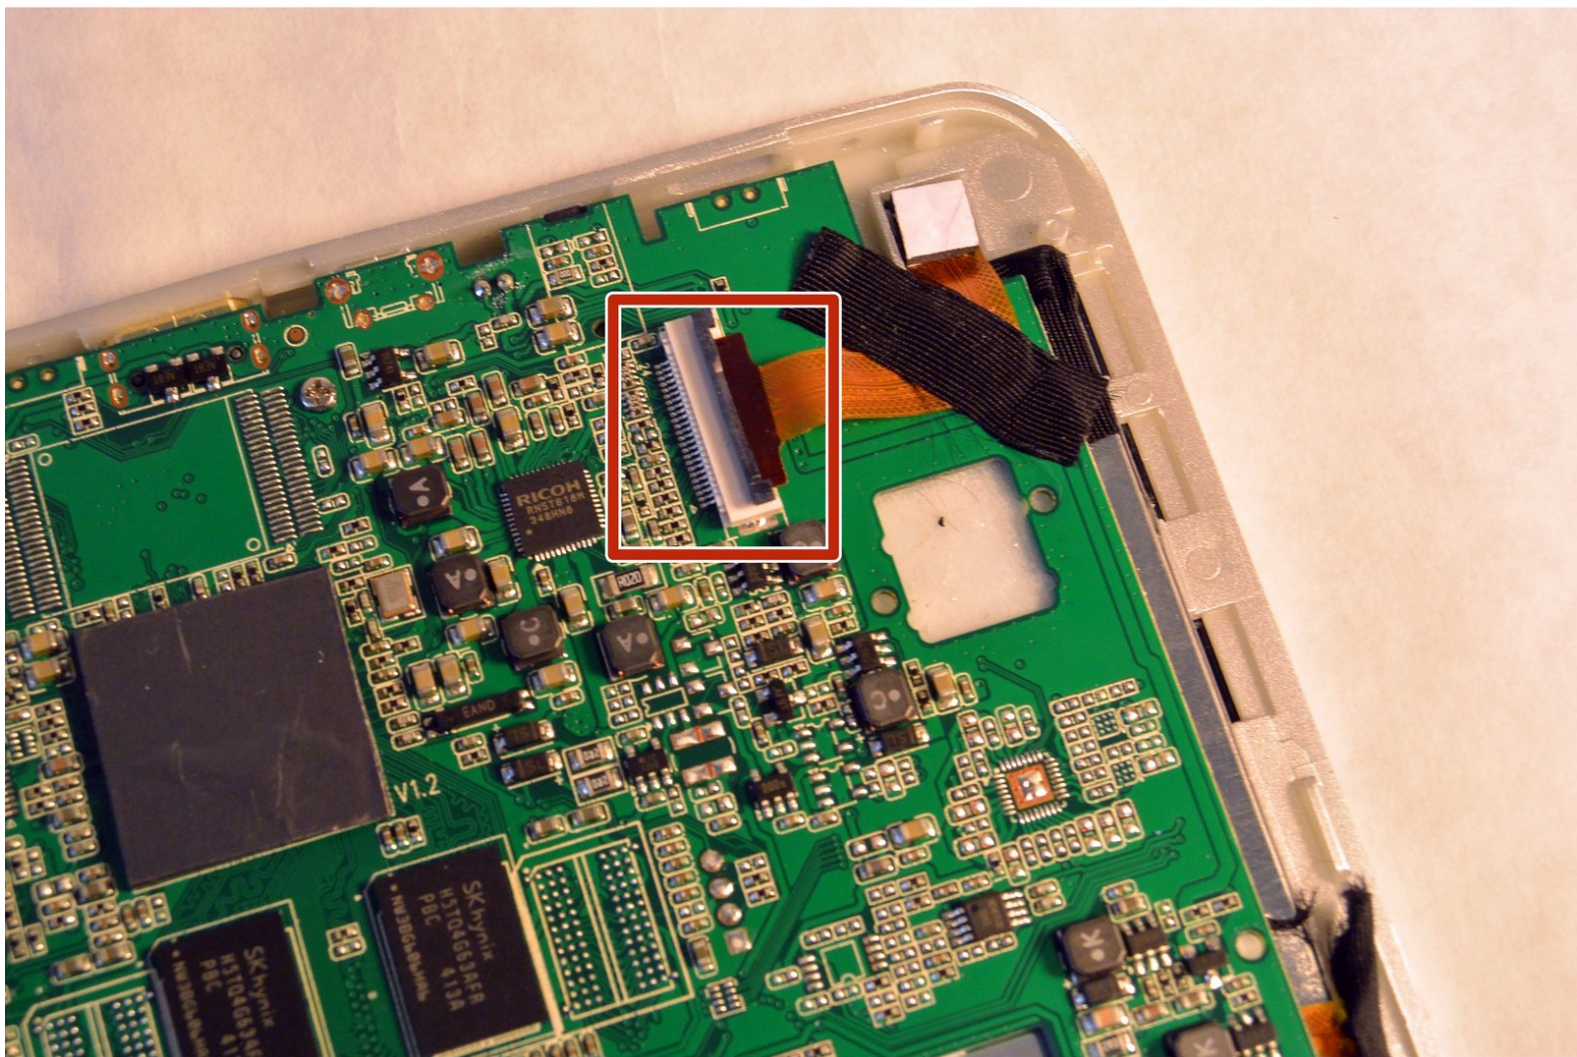

---

## INTRODUCTION

Use this guide to replace a damaged camera on the Zeki TBQG884B tablet.

---

### TOOLS:

- [Phillips #1 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Rear Case




- Remove the two screws from the end of the device where the ports are located using a Phillips #1 screwdriver.

## Step 2



- Rest the tablet on the glass face.
- Insert the tip of a plastic opening tool into the small gap between the grey and white plastic. Pry it open. You should hear the clips opening up.
- Gently work your way around the perimeter of the tablet's edge.


## Step 3

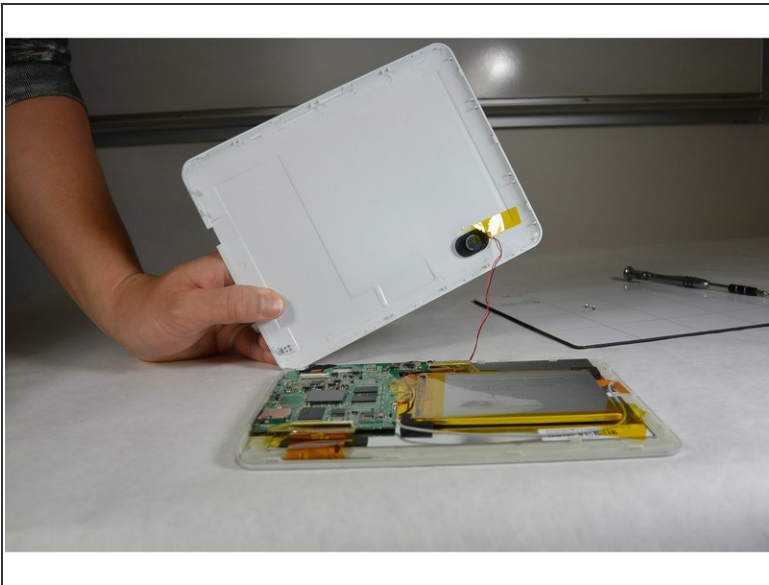

- Separate the back and face plates.
- Remove any tape on the speaker and detach the speaker from the back plate.

**⚠** The speaker is connected to the motherboard by two soldered wires. Don't break them when you remove the speaker.

## Step 4 — Camera

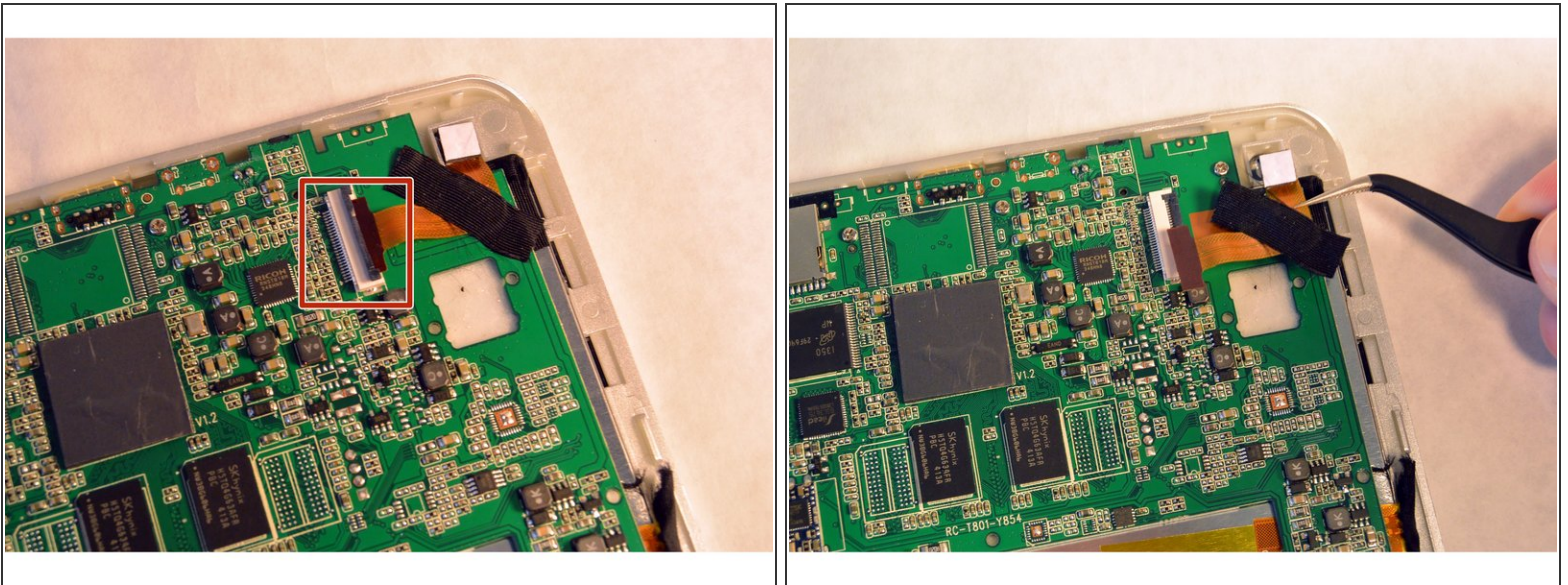

- Open the ZIF connector, the black locker part over the wire ribbon in the motherboard, and remove the wire ribbon that connects the motherboard and the camera.

**i** The camera is located on the top left, above the motherboard.

**!** The camera is usually covered with tape or material. Remove it, and peel the camera off with tweezers for safety.

To reassemble your device, follow these instructions in reverse order.