



Sony Vaio Tap 11 Screen Camera Module Replacement

This guide will walk you through the steps on how to take out and replace your screen camera module.

Written By: Nick Catanzarite



INTRODUCTION

With this guide, you will be taking the screen off of the device to locate the camera module. The following steps will explain how to remove the necessary parts in order to remove the camera module located on your screen.

TOOLS:


- [Phillips #000 Screwdriver](#) (1)
 - [Suction Handle](#) (1)
-

Step 1 — Screen Assembly



- Begin by opening the HDMI/USB port cover on the left edge.
- Remove the three #000 headed, 3 mm long screws located underneath the port cover.

Step 2

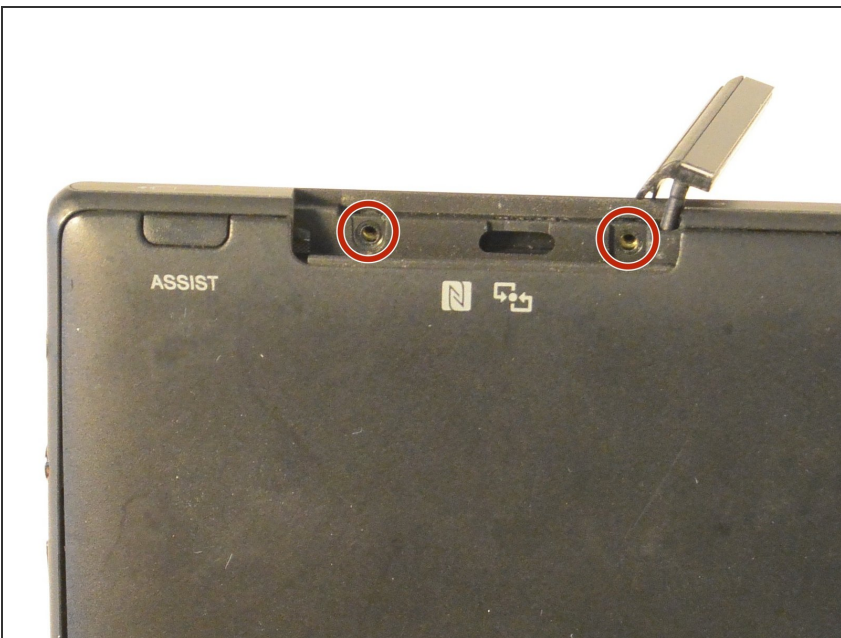


- Locate and open the Micro SD slot on the top side of the device.
- Remove the two screws located beneath the cover.

Step 3




- Attach the suction cup to the top right area of the screen.
 - Pull to separate the screen from the rest of the device.
- ⚠ Be aware of the front camera cable that is still connected to the rest of the device.
- Detach the display ribbon cable.

Step 4 — Screen Camera Module Replacement

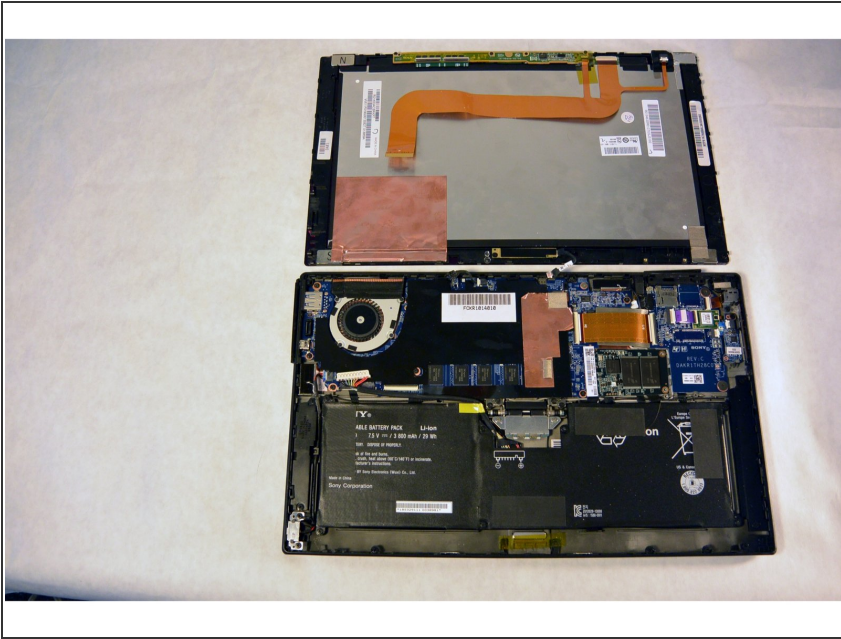


- Flip device upward carefully like you are turning the page of a book.

Step 5

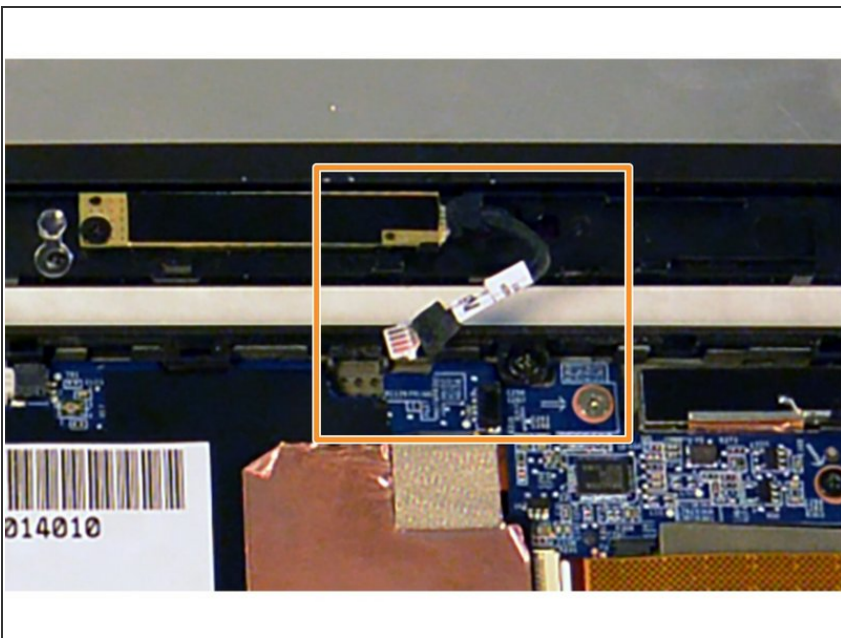

- Disconnect the camera cable from the device backing.

Step 6

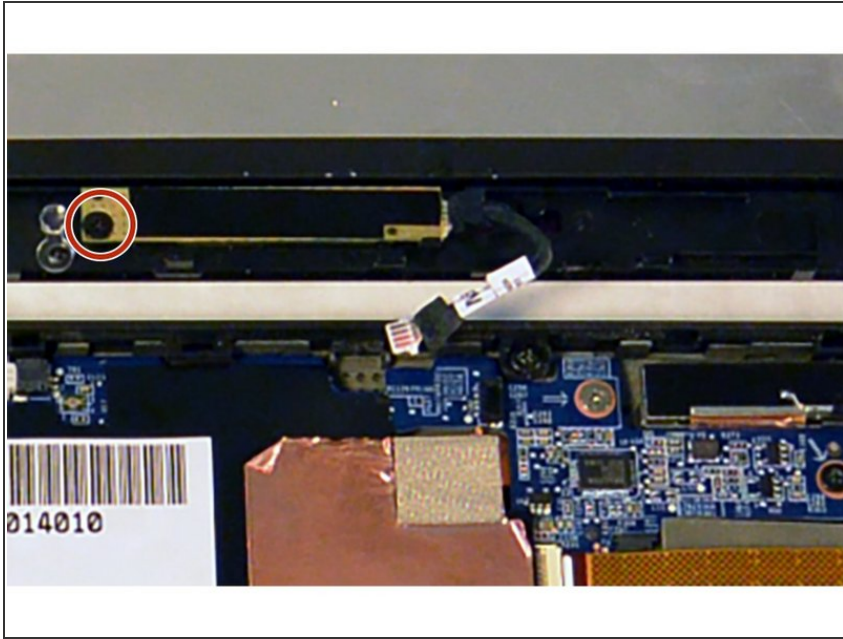

- Remove the single 3 mm Phillips #000 screw on the left side of the module.
- Remove the module from the front panel assembly.

To reassemble your device, follow these instructions in reverse order.