




HTC Desire Vibrator Replacement

Replacing a faulty Vibrator in your HTC Desire.

Written By: Lucas Tenney

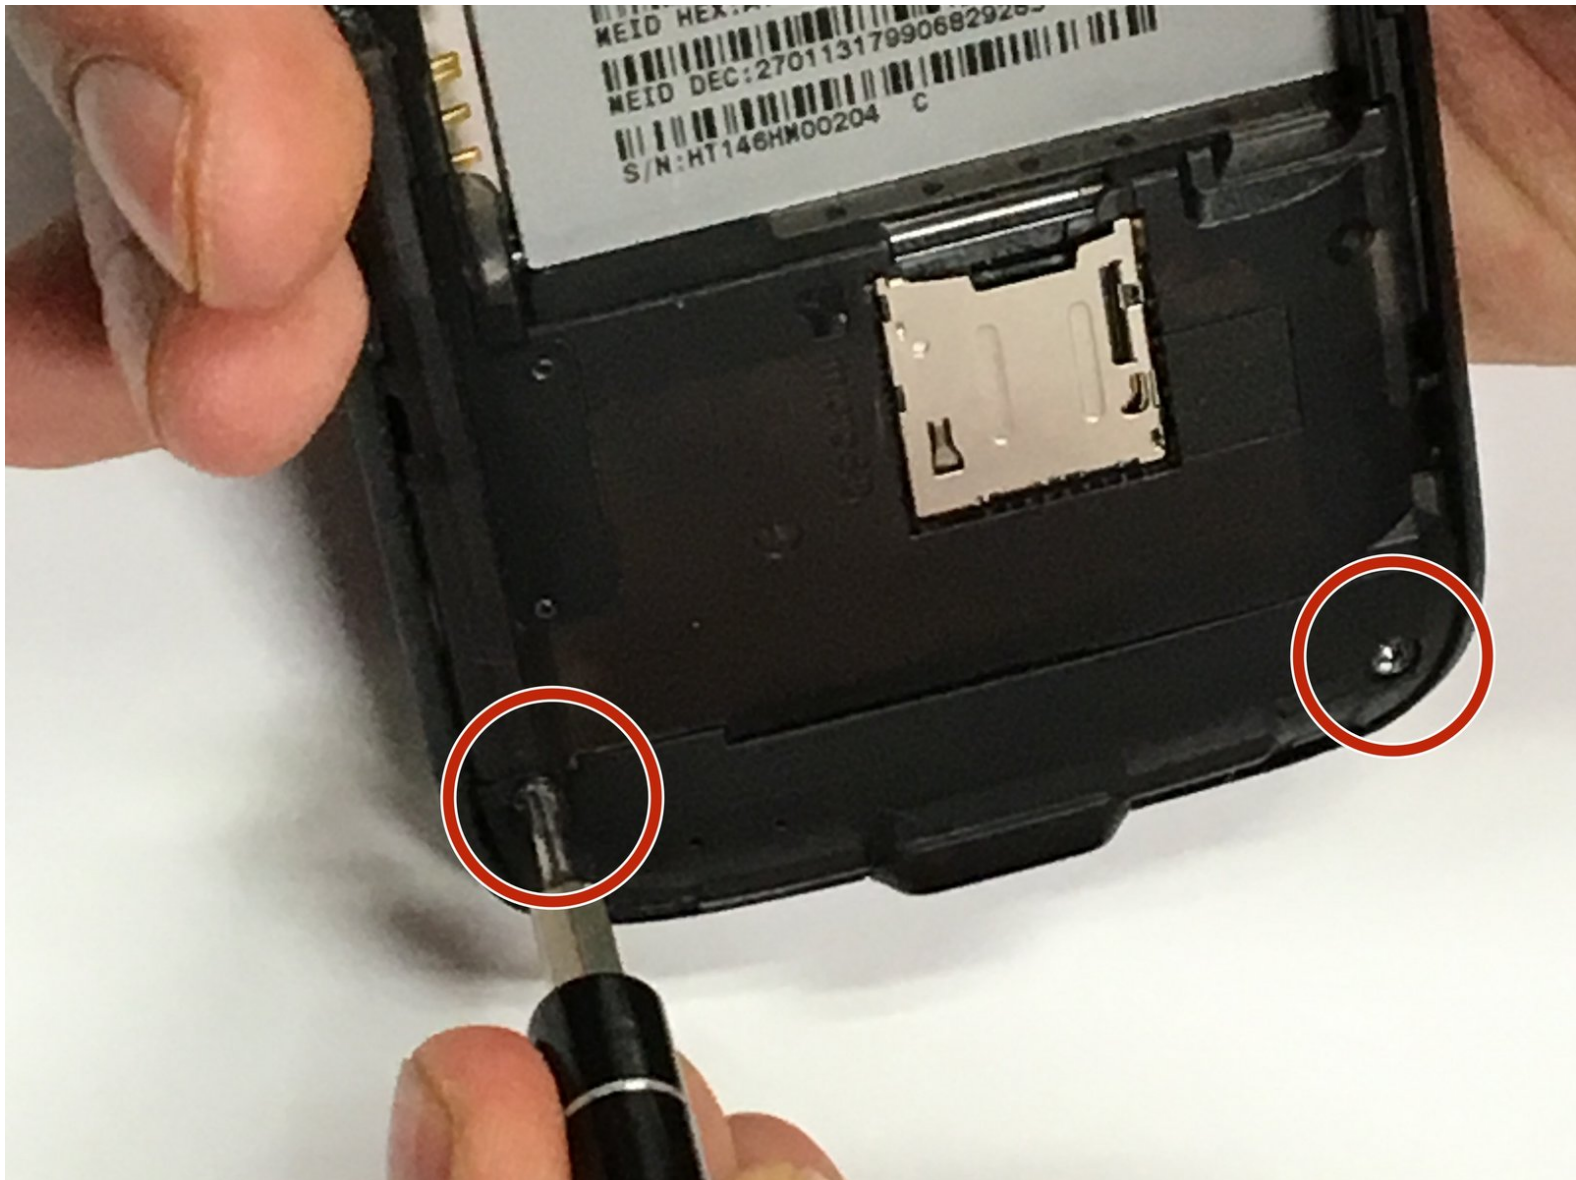

INTRODUCTION

This guide will teach anyone how to replace a faulty vibrator in their HTC Desire.



TOOLS:

- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)



PARTS:


- [Replacement HTC Desire vibrator](#) (1)

Step 1 — Battery




- Insert flat end of spudger into slot on the top of phone to pry off the back plate.

Step 2

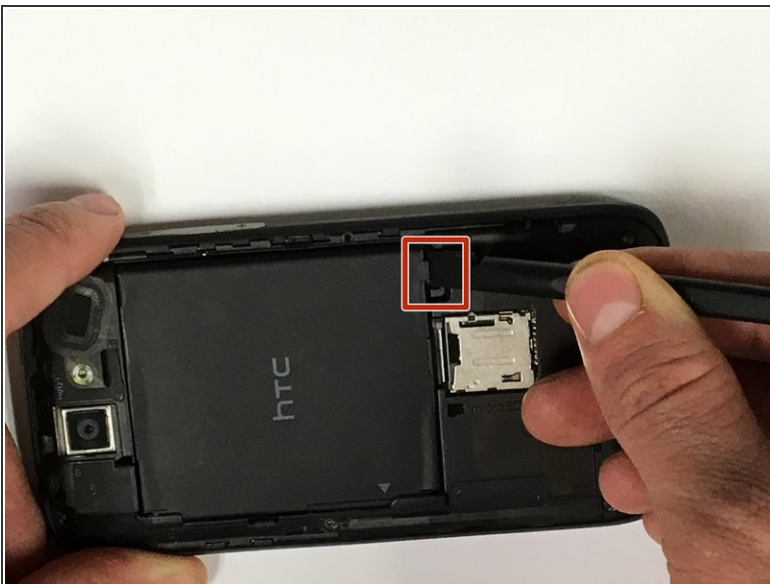


- Use flat edge of spudger to lift the bottom right corner of the battery.
- Lift the battery out of the phone.

Step 3 — Vibrator

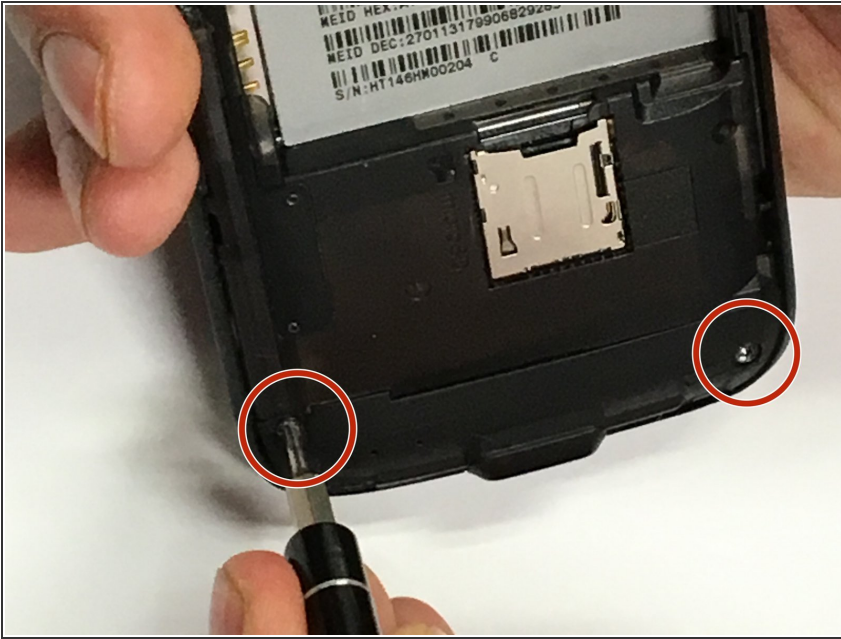


- Remove the lower, two 0.5 mm screws using Torx T5 screwdriver.

Step 4

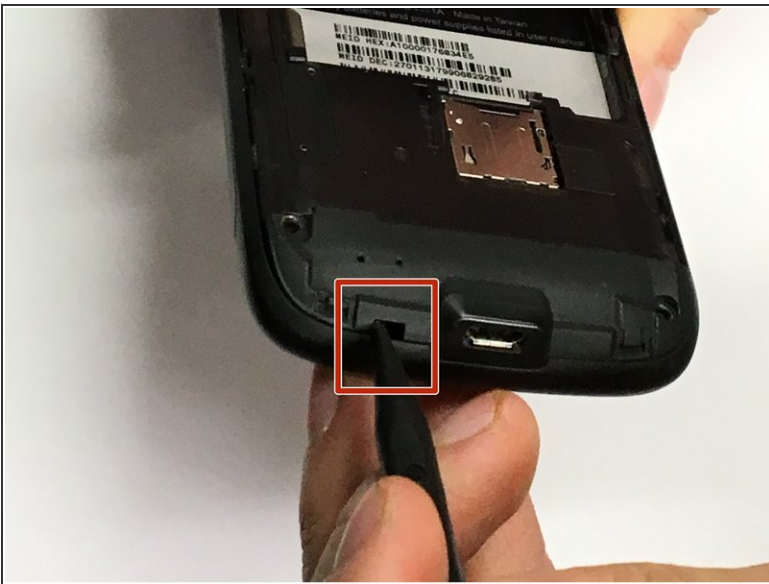

- Use spudger to pry vibrator panel off.

Step 5

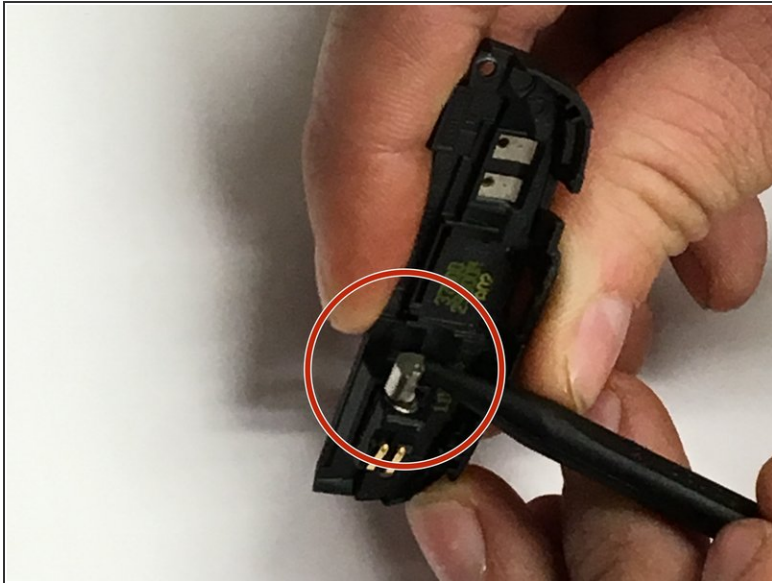

- Use spudger to remove the vibrator.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-11 12:21:51 AM.