




HTC Touch Pro 2 Keyboard Replacement

You want to replace your keyboard. (The synth is much too outdated, man).

Written By: Melinda Phan

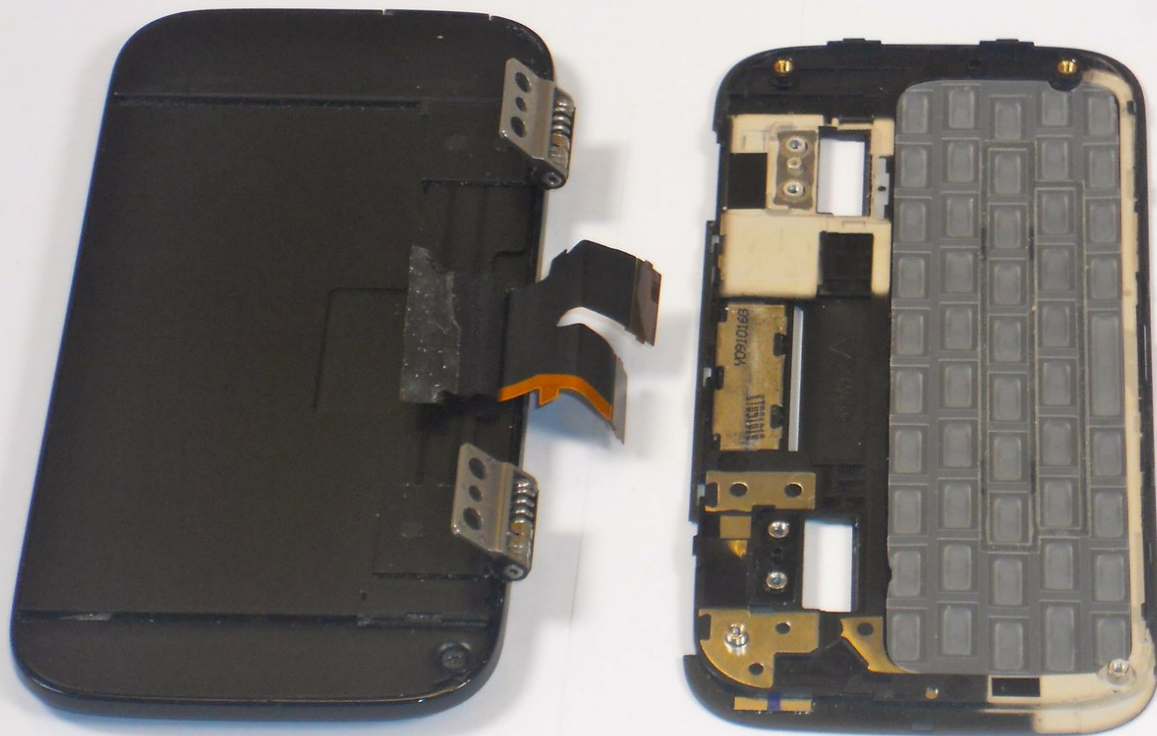

 **TOOLS:**

- [iFixit Opening Tool](#) (1)
 - [T5 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Battery




- Remove the back cover by applying pressure and sliding upward.
- Lift the back cover up and away from the phone.

Step 2



- Remove the battery by lifting upward from the slot located on the right hand side.

Step 3 — Housing

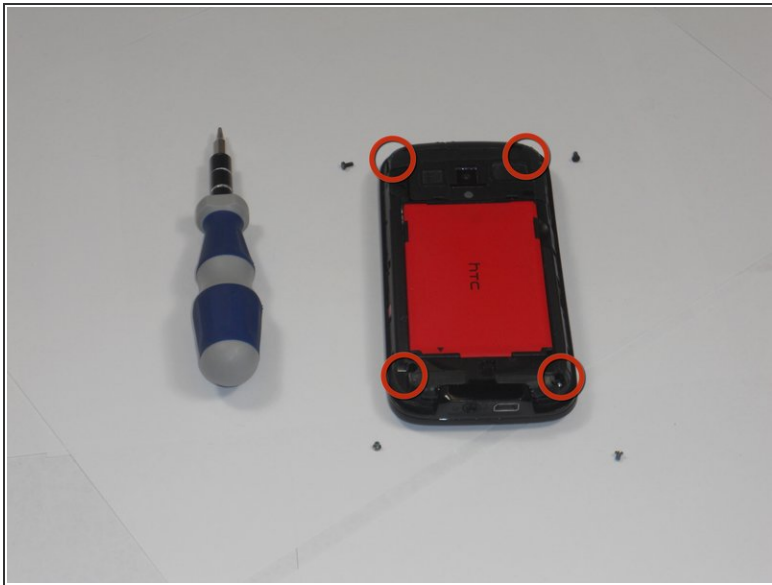


- Using a T5 screwdriver, remove the four screws in corners as shown.
 - Lift the top portion of the rear case.
- ⚠ There is a ribbon attached on the back of this part that requires caution to remove.**

Step 4



- Using a plastic opening tool, detach the plastic casing from keyboard. This may require some force.
- Using a spudger or other thin tool, carefully pry up ZIF connectors as shown. This will allow the black ribbons to detach from the keyboard.
- Slide the two parts away from each other so that the black ribbons slide through the slots and you will now have housing into two parts.

Step 5 — Keyboard

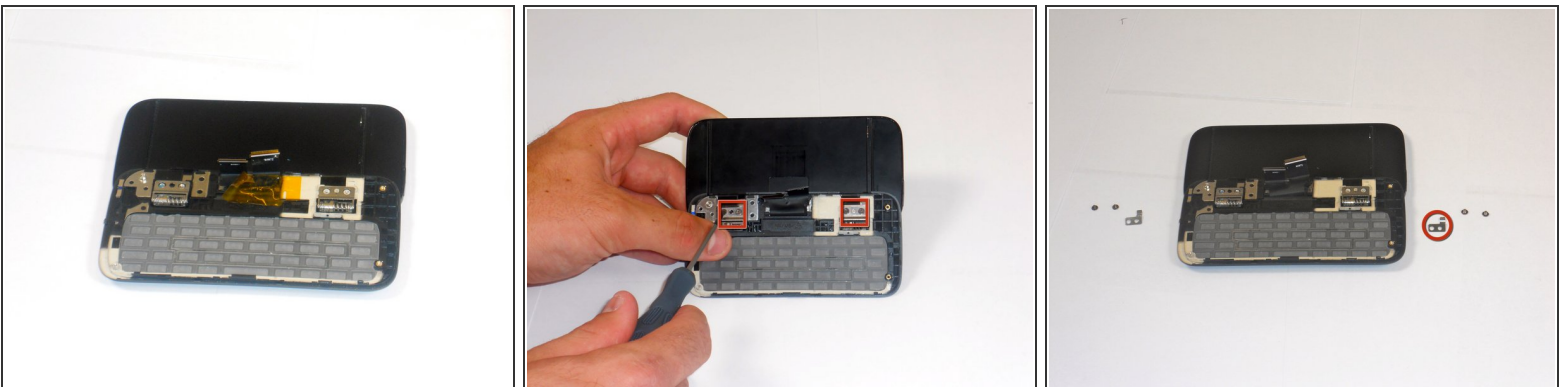


- Peel off the yellow ribbon shown slowly.
- Unscrew the four screws shown in red squares (two in each square) using a 00 screwdriver.
- After the screws are out, you will be able to easily take off the small metal pieces circled in red. Please do so.

Step 6



- Slowly pull dual black strip off using force.
- Behind the dual black strip is very sticky piece of grey tape. Use tweezers (preferably ones with ridges) to peel off the tape. Be careful not to rip it.

Step 7

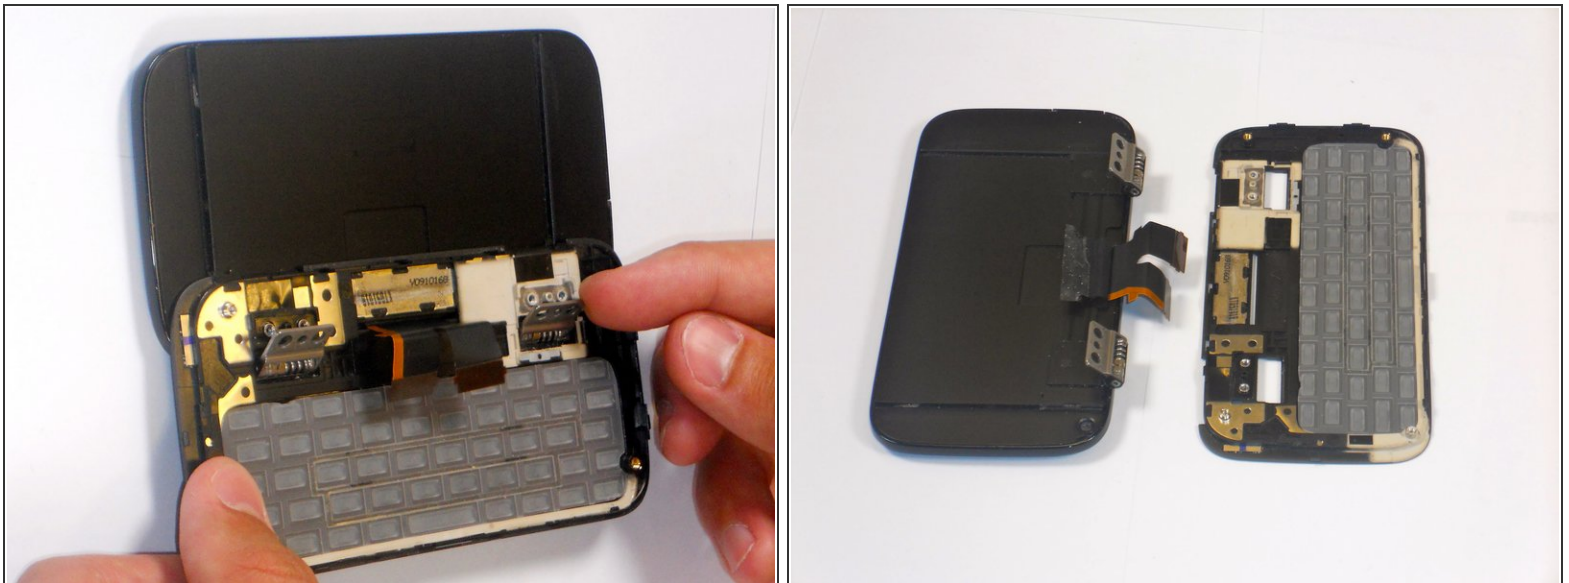

- Lift ZIF connectors up.
- Carefully lift keyboard frame away from display screen.
- You now have the keyboard detached.

To reassemble your device, follow these instructions in reverse order.