



Blackberry Z20 Leap LCD/Digitizer Replacement Replacement

Removing the screen and replacing with a working LCD/Digitizer

Written By: Amanda Baxter



INTRODUCTION

Removing the screen and replacing with a working LCD/Digitizer



TOOLS:

- [T6 Torx Screwdriver](#) (1)
- [Utility Knife](#) (1)
- [Tweezers](#) (1)



PARTS:

- [blackberry leap LCD/Digitizer Assembly](#) (1)

Step 1 — Blackberry Leap Screen Replacement




- BlackBerry Z20 Leap (STR200-2) with a bad LCD. The first question is...Where are the screws?

Step 2 — remove screws




- The screws are behind the sticker beside the camera. Heat the sticker and use a knife to pry under the sticker to remove it. There are 2 screws which you need a T6 torx screwdriver to remove.

Step 3 — unseat screen assembly

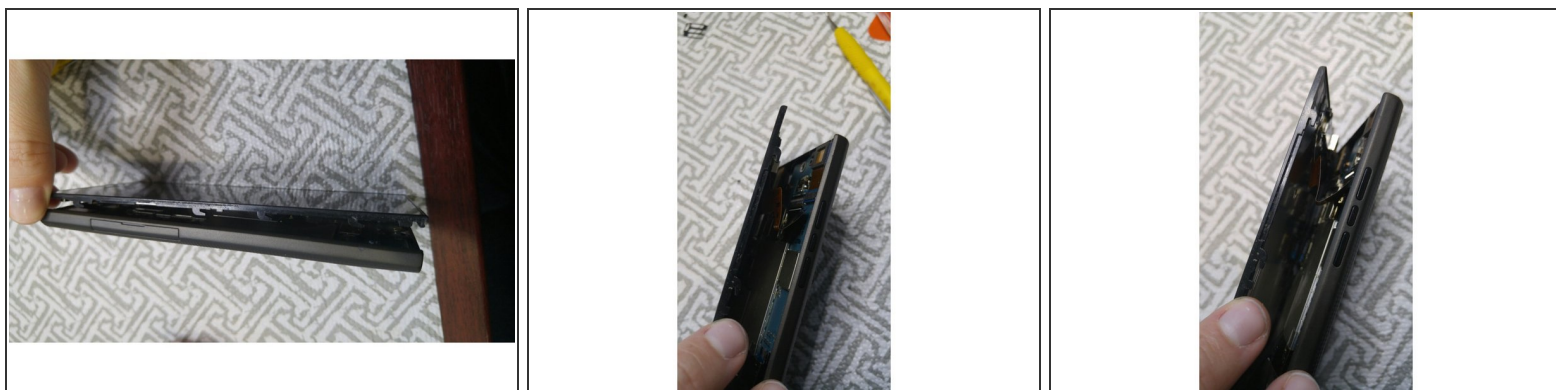

- Push up on screen with thumbs once the screws have been removed. The screen assembly will now come away from the chassis. Be careful there is still some ribbon cables connected to the screen assembly.

Step 4 — disconnect connectors

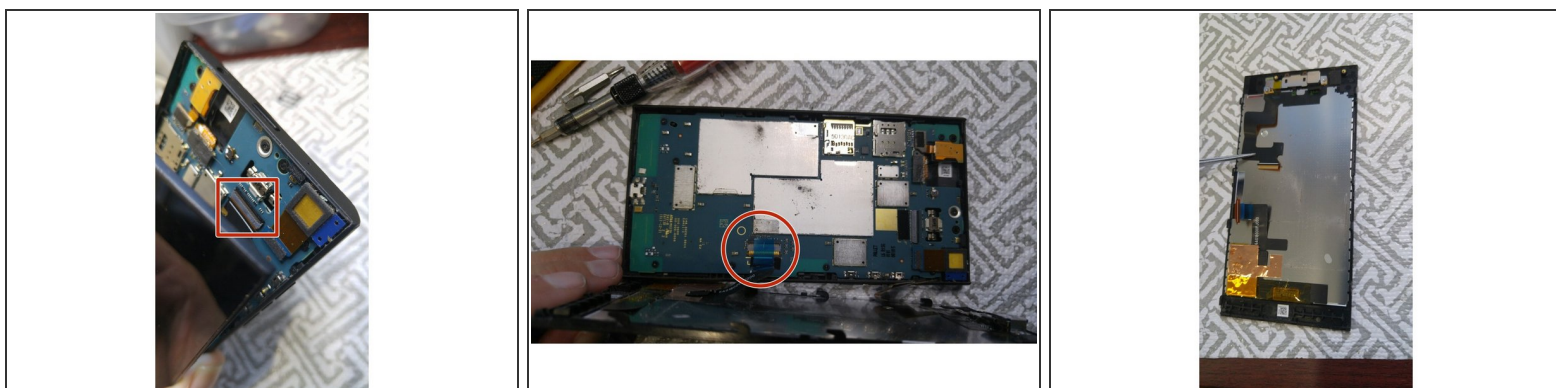

- In the top there is a connector where you have to lift the black part of the connector to remove the ribbon. I used tweezers to lift the connector and to remove the ribbon cable
- Once the top ribbon is removed there is another cable connected in the middle. The phone will open up more to give you access. You will need to lift the black part of the connector to remove the ribbon. Again, I used tweezers. The screen assembly should now come away from the chassis

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-16 03:07:58 AM.