




# HTC HD2 Midframe Replacement

Replace the midframe of your HTC HD2.

Written By: Sam Luedloff

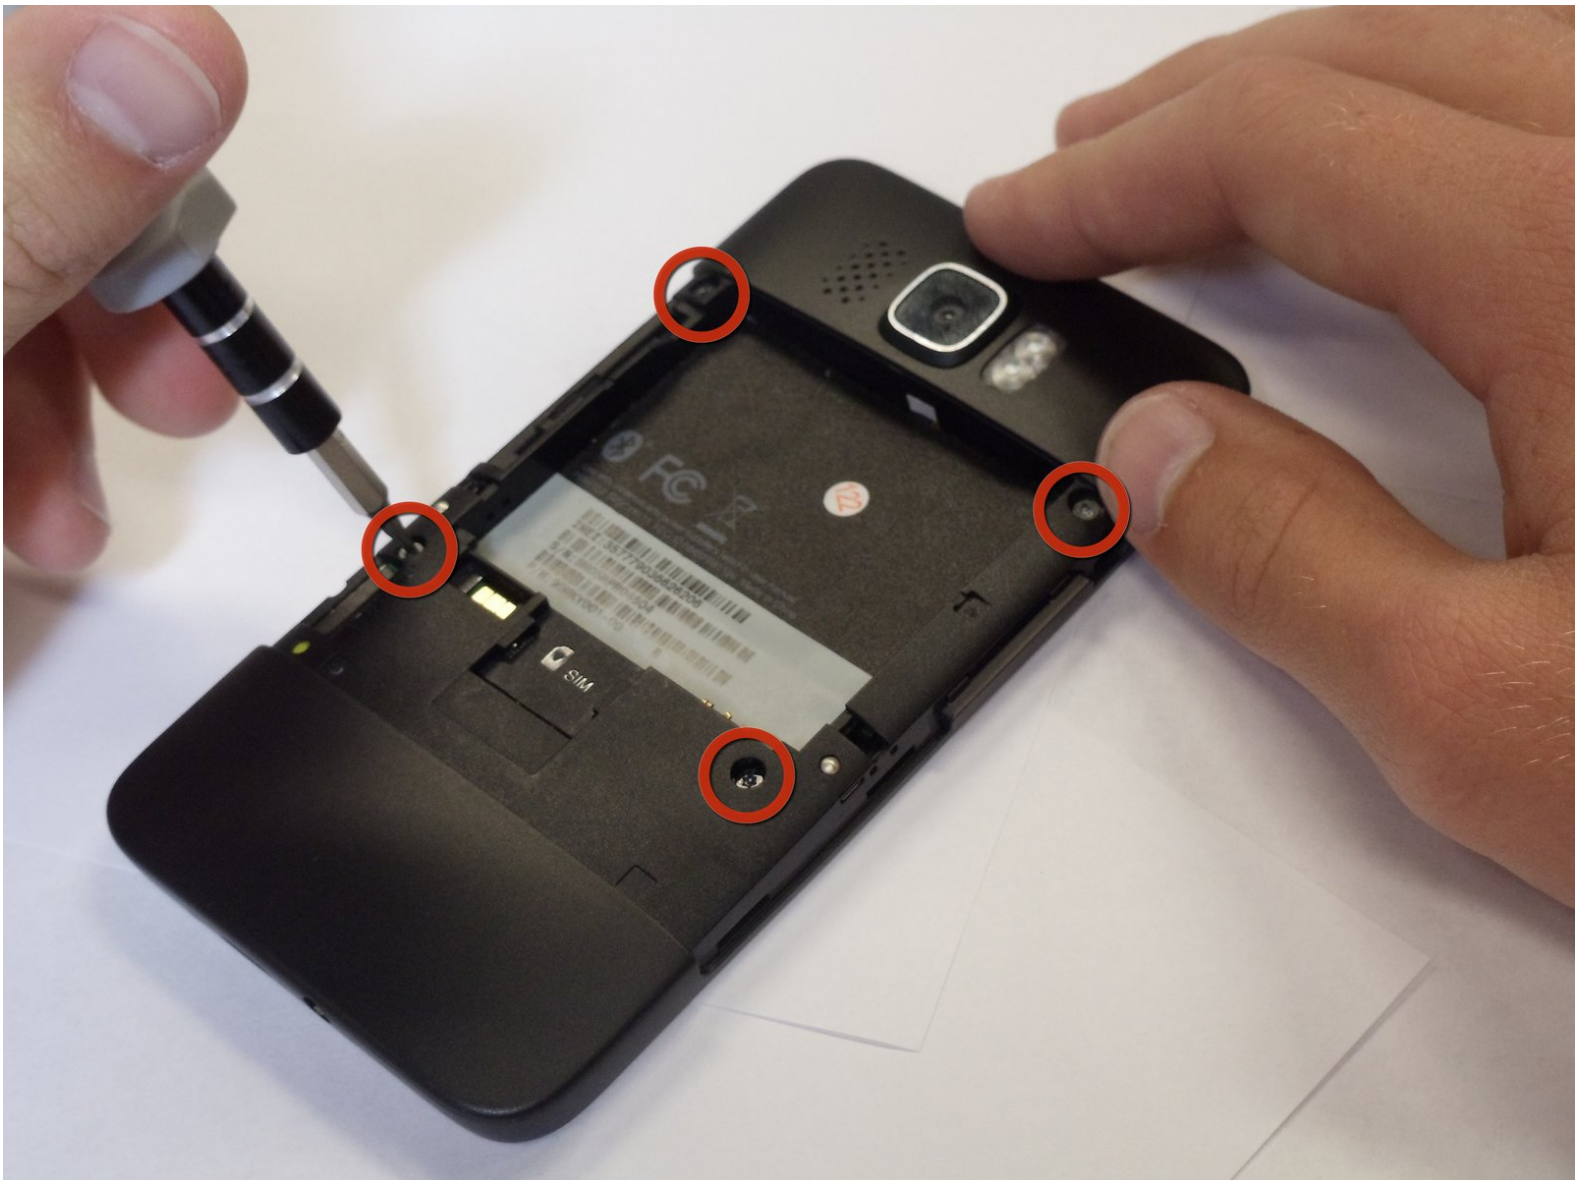

---

## INTRODUCTION

Use this guide to replace the midframe of your HTC HD2.

---

### TOOLS:

- [Spudger](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Battery




- Carefully pull the rear cover from the back of the phone.
- Place a finger beneath the small lip on the left side of the battery.

## Step 2



- Lay the phone down on its screen.
- Lift up on the lip and pull the battery from the phone.



### Step 3 — Midframe

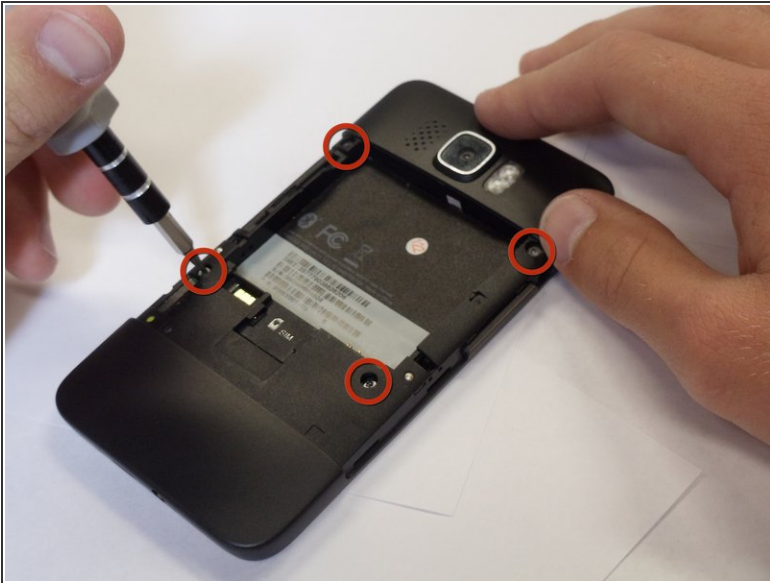

- Remove the four black 3.5mm T5 screws from the back of the phone.



## Step 4

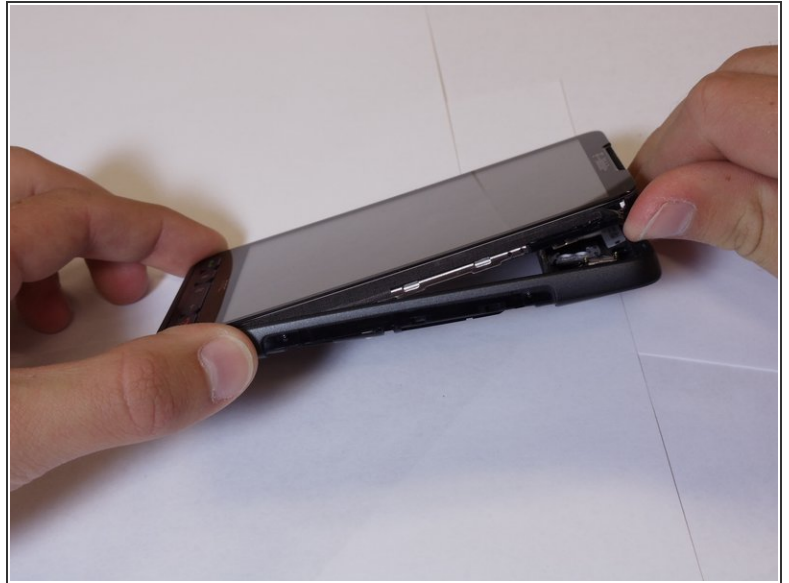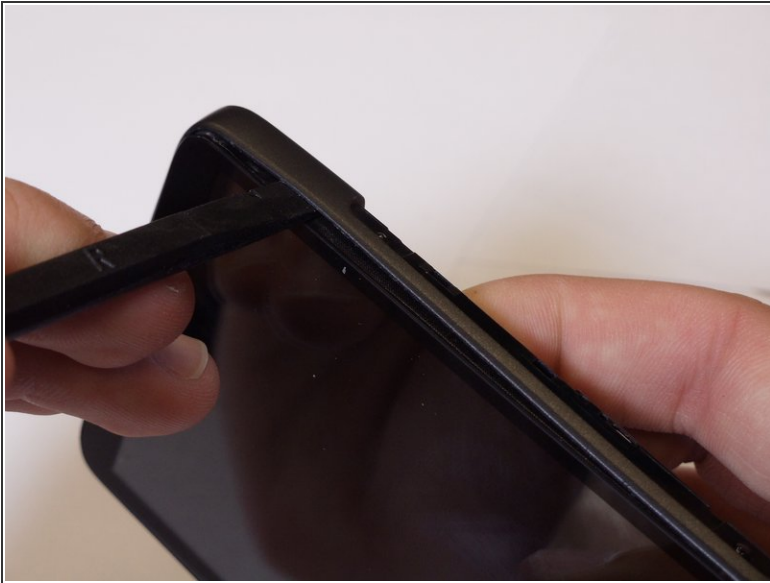

- Insert the flat end of a spudger between the midframe and the display.
- Slide the spudger along the seam between the frame and the display.
- Using the spudger for leverage, carefully pry the midframe away from the display assembly.
  - ⓘ This process will take some effort. Continue to pry slowly and carefully until the frame begins to detach.
- As it releases, pull the midframe away from the phone.
- ⓘ The volume control tab may fall off during removal. It can be easily reattached.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-12 04:46:37 PM.