



# Samsung Galaxy Tab S2 Screen Replacement

Replacing a broken or cracked screen on the Galaxy Tab S2.

Written By: Jovina Martinez



---

## INTRODUCTION

Is your screen cracked or not displaying images correctly? Replacing the screen may solve your problems.

---

### TOOLS:

- [iOpener](#) (1)
  - [Precision Tweezers Set](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Heavy-Duty Suction Cups \(Pair\)](#) (1)
-

## Step 1 — Screen




- ⚠ Working on your device while it is turned on may result in an electric shock. Be sure to shut down and unplug your device before you begin.
- i Removing the screen may be difficult due to strong adhesives.
- Apply heat to all the seams of the device using an iFixit iOpener or heat gun in order to loosen the adhesive around the edges of the screen.

## Step 2





- Insert the plastic opening tool into the gap on the side of the tablet, near a corner where you want to start removing the screen.
  - Place the small suction cup on the screen near the corner that the plastic opening tool is placed.
  - Lift the small suction cup up while pushing down with the plastic opening tool to remove screen (you may need to have someone else hold the device down for proper leverage).
- ⚠** A ribbon cable is attached to the back of the screen. Avoid lifting or moving the screen more than 3-4 inches before disconnecting the ribbon cable or you could damage the device.

### Step 3

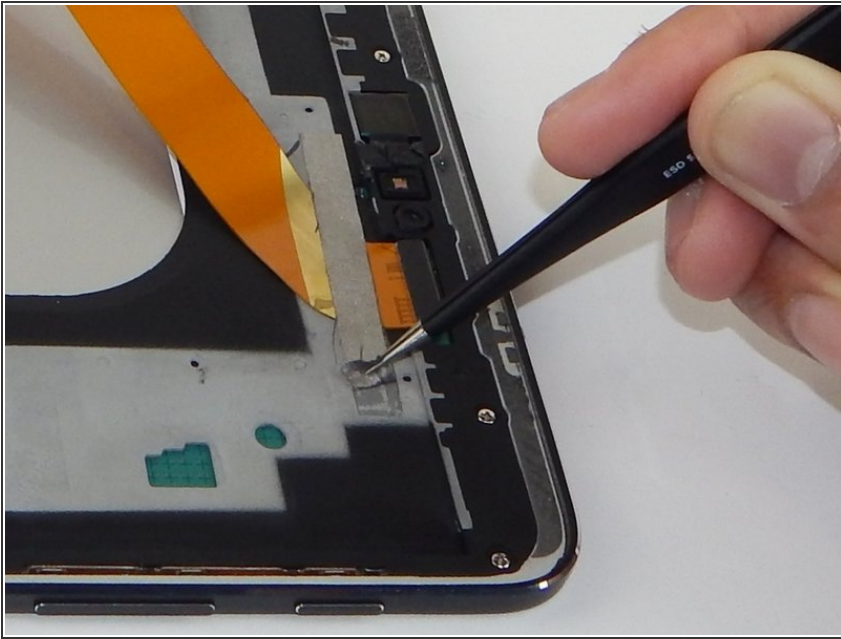

- ⓘ A piece of silver tape is placed over the gold ribbon cable connecting the screen to the tablet.
- Use the tweezers to carefully remove the silver tape.

### Step 4

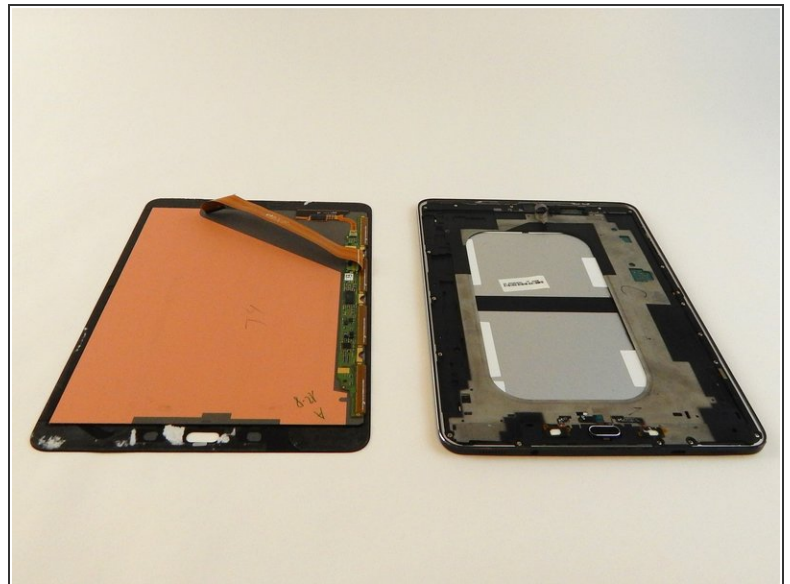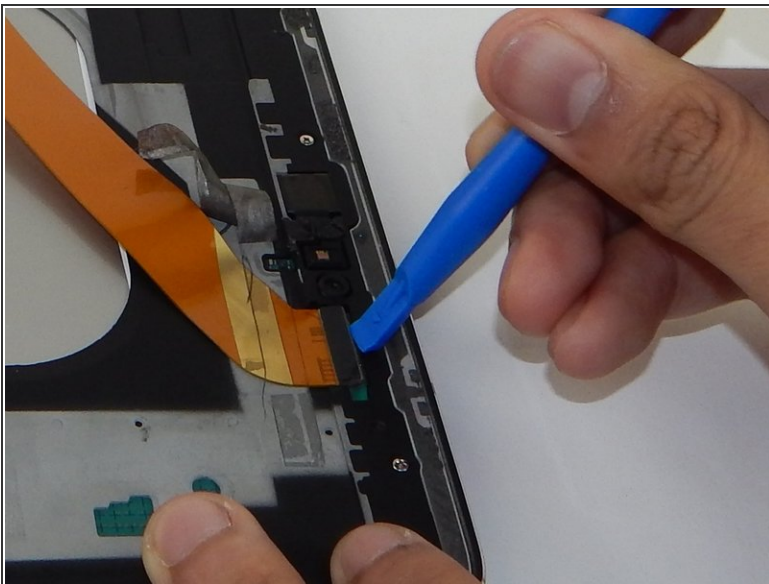

- With the plastic opening tool gently lift to disconnect the gold ribbon cable that attaches the screen to the base tablet.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2020-11-28 04:53:36 AM (MST).

